

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04H	A2	(11) International Publication Number: WO 98/32250
		(43) International Publication Date: 23 July 1998 (23.07.98)

(21) International Application Number: PCT/US98/01250

(22) International Filing Date: 15 January 1998 (15.01.98)

(30) Priority Data:

60/035,698 17 January 1997 (17.01.97) US
Not furnished 19 December 1997 (19.12.97) US

(71) Applicant (for all designated States except US): THE
REGENTS OF THE UNIVERSITY OF CALIFORNIA
[US/US]; 22nd floor, 300 Lakeside Drive, Oakland, CA
94612-3550 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): ACAMPORA, Anthony
[US/US]; 6473 Avenida Cresta, La Jolla, CA 92037 (US).


(74) Agent: FUESS, William, C.; Fuess & Davidenas, Suite II-G,
10951 Sorrento Valley Road, San Diego, CA 92121-1613
(US).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR,
BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE,
GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ,
LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW,
MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL,
TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO
patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European
patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT,
LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI,
CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published

Without international search report and to be republished
upon receipt of that report.

(54) Title: HYBRID UNIVERSAL BROADBAND TELECOMMUNICATIONS USING SMALL RADIO CELLS INTERCONNECTED
BY FREE-SPACE OPTICAL LINKS

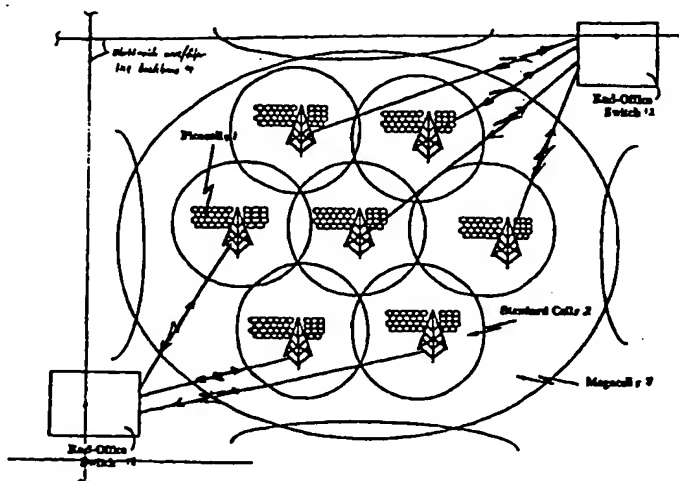

(57) Abstract

Diverse communication terminals attach via broadband radio to a communications network at any of typically three hierarchical cell sizes increasing from, typically, a single building to a city to a region. Almost all telecommunications traffic transpires, however, within lowest-level "picocells 1" to and from low cost "base stations 11" that have typically one radio transceiver (111), four optical transceivers (112), an ATM switch (113) and an ATM controller (114). Each local "base station (11)" is interconnected to a regional "end office switch (12)", where is realized connection to a worldwide wire/fiber line communications backbone (4), upon a multi-hop mesh network (100) via short highly-focused free-space broadband directional optical links (10). By this free-space wireless broadband access the need for new broadband access cabling the "last mile" to subscriber/users is totally surmounted. Subscriber service is of the order of 20 Mb/s peak rate, and 10 Mb/s average rate.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

HYBRID UNIVERSAL BROADBAND TELECOMMUNICATIONS USING SMALL
RADIO CELLS INTERCONNECTED BY FREE-SPACE OPTICAL LINKS

REFERENCE TO RELATED PREDECESSOR NATIONAL PATENT APPLICATIONS

The present patent application is related to U.S.
5 Provisional Patent Application Serial No. 60/035,698 filed on
January 17, 1997, for a METHOD AND APPARATUS FOR HIGH CAPACITY
RADIO ACCESS SYSTEM; and also to the U.S. Utility Patent
Application Serial No. 08/AAA,AAA, filed on December 21, 1997,
of the same name as this application. Both related predecessor
10 U.S. national patent applications are to the selfsame Anthony
Acampora who is the inventor of the present application.

BACKGROUND OF THE INVENTION

1. Field of the Invention

15 The present invention generally concerns wide area
multimedia broadband telecommunications systems and services,
particularly systems and services for homes, offices, outdoor
and/or remote locations where telecommunication terminals are
attached to a wire- or fiber-based telecommunications network via
20 wireless links, thereby permitting users of the
telecommunications terminals the ability to roam freely and
obviating any requirement that a wired "telecommunications
outlet" should be available.

The present invention particularly concerns the
25 partitionment of wide area multimedia broadband
telecommunications systems and services both (i) in the media --
radio, free-space optical, or wire and fiber -- over which
communications traffic from point to point and from time to time
transpires, and also (ii) in the system hardware, and among the
30 system protocols, for handling this communications traffic (upon
the various media). All partitionment is to the end of ensuring
universal low-cost high-performance wide-area
(tele)communications availability. In particular, the present
invention will be seen to be concerned with how to connect the
35 existing world communications "backbone" which is, in America
circa 1997, based primarily on wire and optical fiber lines, to
the typical subscriber household and office -- the so-called
"last mile" problem.

2. Description of the Prior Art

2.1 General Challenges Bessetting Universal Communications Systems and Services

5 For the past several years, the telecommunications industry has witnessed an explosive growth in the demand for (1) non-voice types of services (driven by so called multimedia traffic, and suggestive of some unspecified combination of low and high speed data, voice, image, and video); and (2) service to
10 non-stationary, mobile, end terminals. See D. Wright, Broadband: Business Services, Technologies, and Strategic Impact, Artech House, Boston, 1993; A. S. Acampora, An Introduction to Broadband Networks, Plenum Press, New York, 1994; IEEE Communications Magazine, issue on Introducing the Internet Technology Series, Vol. 35, No. 1, Jan. 1997; T. S. Rappaport, Wireless Communications Principles and Practice, Prentice Hall, New
15 Jersey, 1996; and IEEE Personal Communications, issue on Wireless ATM, Vol. 3, No. 4, Aug. 1996.

20 Despite this demand, three primary technical problems remain to be solved before a communications infrastructure adequate to meet modern demand can be created.

The first of these problems involves the inadequate capacity afforded by the copper wires which typically presently, circa 1997, serve to connect homes and offices to core, or "end-office", switches within the existing U.S. national telecommunications network. These wires are additionally characterized by their inflexibility to accommodate new and added communications devices at the user portal; exactly where changes are most likely to occur. In other words, even if all the copper
25 wire in the U.S was to be instantaneously converted to high-bandwidth fiber optics, the locations, and the physical connections, of new telephones or computers or televisions or other devices to the wire and fiber communications network would remain troublesome, effectively mandating extensive and expensive
30 manual services to "wire" and "re-wire" the home or office site every time site service requirements change appreciably.

35 It would obviously be useful if some "magic box" existed in

- 3 -

the attic, or the communications closet, which permitted that any communications device brought within the home or building, whether permanently or temporarily, could be immediately wirelessly integrated into the communications network totally without the use of skilled labor. The "magic box" would preferably be universal, inexpensive, and supportive of a high communications capacity. Although this "magic box" might occasionally have to be upgraded if new and very large communications requirements were to arise at the home or office site, the requirement of expensively "custom wiring" the communications of the home or office would be obviated.

The second problem concerns the limited available bandwidth of the radio spectrum to meet the demand for non-stationary and/or flexible communications services. The "black box" of the previous section could clearly be a cellular radio transceiver serving to link diverse communications devices, whether portable or not, to a communications grid by radio. Alas, the radio spectrum that is both now (i.e., in 1997) allocated, and reasonably allocatable, for general telecommunications services is already crowded, and incapable of meeting all the demands for real-time multimedia communication arising over any extended populated geographical area.

The third problem concerns the desire, if not the political necessity, of guaranteeing universally (i) available and (ii) affordable communications services. It is clearly possible to auction the radio spectrum, and to let those who can afford more use more. It is clearly possible to cost-effectively service certain metropolitan areas while leaving communication "backwaters" that are not fully enfranchised with evolving equipments and services. However, in a democracy there are limits in allocating the God-given public resource of the radio spectrum purely on financial grounds.

At the same time the existing U.S. national communications infrastructure presents challenges to future upgrading, it also presents opportunity. As reported by author and futurist George Gilder in his book "Into the Fibersphere", and in his columns of the "Telecosm Series" appearing in Forbes Magazine, "the ultimate

source of bandwidth expansion is the immense capacity of optical fiber. Now comprising a global installed base of 40 million miles (25 million miles in North America), each optical fiber, as Paul Green of IBM estimated to Forbes ASAP four years ago [i.e., in 1992] commands and intrinsic available bandwidth of 25,000 gigahertz." How much bandwidth is this? It is more than all the radio telecommunications -- from ultra low frequency communication with submarines to K band satellite links -- that are at any one time transpiring on the entire planet. Yes, each single strand of 40 million miles of optic fiber already existing can potentially handle all the radio traffic in the entire world.

Where then exactly is located this wonderful pipeline to all the world's information? In America it is close by, but has not yet reached the average American doorstep. Five years ago each American household was an average of 1,000 households away from a fiber node, now it is but 100. At the beginning of 1996 15% of U.S cable TV subscribers directly connected to fiber optics; at the end of 1996, 30%. Being that not all American households presently have, or even can have, cable television, the average separation in feet of a U.S. household or business from an optic fiber is still several hundred feet. And, due to the first problem discussed above, many Americans in metropolitan areas literally have optic fiber "at their feet" but are unable to effectively connect to it.

It will be seen to be the objective of the present invention to solve all three problems, and to cost-effectively and equitably avail all the world's peoples of the opportunity to communicate into the growing fiber optic communications "backbone" of the United States and of the world.

The capacity and flexibility problem at the user interface will be, by and large, solved by the present invention. The user will be able to add new telecommunications devices at will within broad limits. Although these devices will often be bi-directionally communicating, and are in general used for purposes such as Internet access, pay-per-view, programming on demand, and multimedia communication that are quite different from traditional broadcast radio and television, they will require no

- 5 -

more "installation" than, for example, does a store-purchased radio or television receiving broadcast signals.

The limited available bandwidth of the radio spectrum will likewise seen to be solved -- without repealing physical laws -- by the expedient of reusing most portions of the radio spectrum.

Finally, the (i) availability and (ii) affordability of universal communications services will also be seen to be dealt with effectively in the present invention, where any system user is but little burdened with the cost of the communications network if he or she is but a light user of its services. The un-subsidized cost of, for example, "life line" telecommunications services, even in remote areas, should be commensurate with what it is now. This is true even though an immediate "next" user who is adjacently located both geographically and logically in the communications network may volitionally use awesomely large telecommunications services, incurring the costs therefore.

SUMMARY OF THE INVENTION

The present invention contemplates a new type of broadband access system for providing high quality, bandwidth-upon-demand, communication services to homes and offices. The invention is a candidate architecture for immediate implementation as a significant portion of the United States national communications infrastructure in the twenty-first century, and is suitable for world-wide use. This portion is particularly between (i) diverse (tele)communicating equipments that are located in American homes and offices and (ii) the U.S. national and world communications "backbone" which is, by and large, presently based on copper wire and on fiber optics. This portion of the U.S. national communications infrastructure -- which is the portion primarily dealt with by the present invention -- is commonly called the "last mile".

1. System General Description

- 6 -

In the communications system of the present invention, diverse communication terminals attach to a communications network via short radio links. Terminal users can roam freely within a house or building unencumbered by availability of wired communications outlets. Basic service is extended within this region by and through small, high capacity, broadband radio cells called "base stations".

Typically large grid arrays of base stations are interconnected; each base station to several of its neighbors, via short, highly focused free-space broadband optical or millimeter wave links in a multi-hop mesh network. Stepwise multi-hop communication upon the mesh ultimately leads to an "end office" where access to a wire, or fiber, communications "backbone" is made. By this totally free-space broadband access any need for new broadband access cabling over the "last mile" is totally surmounted.

A multi-tiered arrangement of radio cells further extends radio telecommunications service both to out-of-building pedestrian and to vehicular users. The projected several tiers of free-space radio cells will ultimately provide universal broadband radio telecommunications service over the entirety of the planet.

This approach of the present invention presents issues involving reliability, availability, capacity, and hand-off. These issues are identified and addressed in this specification. The obtainable service rate is of the order of 20 Mb/s peak rate, and 10 Mb/s average rate, to each and all subscribers, universally within a geographical area projected in the first instance be the continental U.S.

The systems approach of the present invention surmounts three broadband access challenges. The preferred system uses three tiers of radio cells, with some possibly large number of lower-tiered cells nested within each higher-tiered cell. To avoid extensive re-wiring, short, free-space optical or millimeter wave links interconnect the base stations of the lowest-tiered cells.

The overwhelmingly greatest fraction of access traffic is

handled by cells in the lowest tier. Here, each of a large number of geographically small, high capacity radio cells (called "picocells") is responsible for serving some small number (perhaps one) of homes and/or offices. Most service subscribers will, in most cases, attach to the network via their home or office base station and, through this base station, enjoy complete freedom to roam within the building and its immediate surroundings.

A cluster of contiguous picocells thereby serves a large population of users, each of whom is served via a home or office picocellular base station. A packet mode of wireless access, similar to if not identical with the Asynchronous Transfer Mode (ATM), supports the bandwidth-upon-demand needs of multimedia traffic. See M. de Prycker, Asynchronous Transfer Mode, Ellis Horwood Limited, West Sussex, 1992.

Imbedded virtual connection trees maintain quality-of-service guarantees while permitting rapid, decentralized hand-off of live connections among adjacent picocells. See A. S. Acampora and M. Naghshineh, An Architecture and Methodology for Mobile-Executed Hand-Off in Cellular ATM Networks, IEEE J. Sel. Areas Comm., Vol. 12, No. 8, Oct. 1994; A. S. Acampora and M. Naghshineh, Control and QoS Provisioning in High Speed Microcellular Networks, IEEE Personal Communications, Vol. 1, No. 2, 2Q 1994; M. Naghshineh and A. S. Acampora, Design and Control of Micro-Cellular Networks with QoS Provisioning for Real Time Traffic, J. High Speed Networks, Vol. 5, No. 1, 1996; and M. Naghshineh and A. S. Acampora, Design and Control of Micro-Cellular Networks with Supporting Multiple Lanes of Traffic, Wireless Networks. Vol. 2, No. 3, August 1996. See also U.S. patent nos. 5,528,583 for a METHOD AND APPARATUS FOR SUPPORTING MOBILE COMMUNICATIONS IN MOBILE COMMUNICATIONS NETWORKS; 5,497,504 for a SYSTEM AND METHOD FOR CONNECTION CONTROL IN MOBILE COMMUNICATIONS; and 5,487,065 for a METHOD AND APPARATUS FOR SUPPORTING MOBILE COMMUNICATIONS IN ASYNCHRONOUS TRANSFER MODE BASED NETWORKS to the selfsame A. Acampora who is the inventor of the present invention. The contents of these prior patents are incorporated herein by reference.

In the preferred embodiment, the picocellular base stations are themselves interconnected by a dense mesh of highly focused, free-space optical or millimeter wave links which are physically short in length, i.e. under several hundred feet. As will be shown, the shortness of these links, and their highly focused nature, provides excellent margin against fog and other atmospheric disturbances (essentially 100% availability). Also, although the transmitters and receivers of the free-space optical links must be spatially aligned, the tolerances are such that the links can easily withstand extreme mechanical disturbances such as strong wind force. In an alternative arrangement, the picocell base stations are interconnected by highly-focused, point-to-point, millimeter wave beams.

By means of these free-space optical (or millimeter wave) links, traffic generated within (or delivered to) any picocell will, in general, be relayed among a sequence of base stations in a multi-hop arrangement, eventually entering (or leaving) the wired network at a regional "end office". The picocellular base station, itself, is a small stand-alone unit containing a power supply, antenna, radio equipment, baseband processing equipment, a small packet switch (needed to relay traffic), and several optical (or millimeter wave) transceivers, each aimed at a different one of the neighboring picocellular base stations. The richness of the optically-based (millimeter-wave-based) interconnecting mesh, and its alternative routing capabilities, serve to balance the traffic among the optical links and, also, to vastly improve system reliability. For communications upon a hardware- and software-scalable optical network (employing wavelength- routing, wavelength reuse and multi-hop packet switching; not all of which features are required in the system of the present invention) see The Scalable Lightwave Network by A. S. Acampora appearing in IEEE Communications Magazine, Vol. 32, No. 12, December 1994.

The second tier of cells is more conventional in appearance. Each "standard cell" covers an area with a diameter measured in terms of miles or tens of miles, and a variable number of picocells (ranging from zero to, perhaps, several thousand) is

contained within its footprint. The base station of a standard cell attaches directly to an end office. Each standard cell serves three purposes: (1) extension of service to any location not served by a picocell; (2) extension of service to any vehicles traveling at a speed too great to be accommodated via picocellular handoff; and (3) provisioning of an alternate means to access the service office in the event of a picocellular failure and/or interruption of all of its optical links. Since a standard cell handles only the overflow traffic not served by its subtended picocells, it is envisioned that its telecommunications traffic burden will remain modest.

The highest tier contains a contiguous raster of megacells, each with a typical diameter of several hundred miles. The megacells (1) provide access from locations covered by neither a picocell nor by a standard cell, and (2) insure universal availability. It is envisioned that the megacells will be created by a constellation of Low Earth Orbit (LEO) satellites. Once again, since a megacell handles only the overflow traffic from its subtended standard cells and picocells, its traffic burden should remain modest.

Because the footprint of a picocell is so small, its bandwidth is shared by only a small number of users (possibly only one), and each subscriber thereby enjoys broadband service. By re-using the radio spectrum sufficiently often, the problem of limited availability of spectrum is surmounted. Furthermore, since each picocellular base station is served by its free-space optical and/or millimeter radio links, new buried broadband cabling apparatus is unnecessary, and the capacity constraint of existing copper wiring is surmounted. Finally, the standard cells and megacells extend service to regions not covered by picocells, improve reliability, and serve high-velocity vehicles for which hand-off among picocells might be problematic; assuring universal service with no blackout regions.

Note that broadband access is not only extended to homes and offices but, moreover, the access enjoys the additional virtue of being tetherless. Both pedestrians and vehicles are readily served.

- 10 -

The preferred telecommunications system is based on Asynchronous Transfer Mode (ATM) transport. Although this assumption is not essential, ATM supports the type of virtual connectivity and instantaneous, on-demand access to bandwidth presently preferred for serving newly emerging types of non-voice traffic. Thus, all interfaces (radio at all three tiers, free-space optical, and serving office) are assumed to be ATM. For the preferred system, the radio links support a peak data rate of, typically, 20 Mbits/sec, and no optical link is operated at a rate greater than, typically, 155 Mbits/sec. Also, although it is not mandatory, it is further assumed that the backbone wired network is based on ATM.

2. First Aspect of the Invention: A Dual-Spectrum Telecommunications Apparatus

In accordance with a first aspect of the present invention, a telecommunications apparatus includes (i) a communications switch, (ii) a first transceiver, electrically coupled to the communications switch, for wirelessly telecommunicating externally to the apparatus in a first portion of the electromagnetic spectrum, and (iii) at least one second transceiver, electrically coupled to the communications switch, for wirelessly telecommunicating externally to the apparatus in a second portion of the electromagnetic spectrum that is of higher frequency than is the first portion. A controller causes the communications switch to route telecommunications traffic between the first transceiver and the second transceiver. Accordingly, by operation of the apparatus wireless telecommunications are routed between a first and a second, higher frequency, portion of the electromagnetic spectrum.

The first transceiver is preferably a radio transceiver. The second transceiver is preferably a transceiver of free-space optical telecommunications signals. In this embodiment wireless telecommunications are routed between radio and optical portions of the electromagnetic spectrum.

The communications switch preferably operates under the Asynchronous Transfer Mode protocol.

- 11 -

In the preferred embodiment, the optical transceiver includes at least one, and preferably four or more, optical-receivers -- each receiving free-space optical telecommunications signals over a different free-space optical path -- coupled with
5 a like number of optical transmitters -- each transmitting free-space optical telecommunications signals over a different free-space optical path. By this construction free-space optical telecommunications may be simultaneously maintained over a plurality of different free-space optical paths.

10 The controller preferably further acts to cause the communications switch to further route telecommunications traffic from the optical receivers to the optical transmitters. In this manner wireless telecommunications are not merely routed between the radio and the optical portions of the electromagnetic
15 spectrum, but are also routed between free-space optical paths.

The telecommunications apparatus so constructed, and so operating, is typically situated in a wireless telecommunications mesh of a large number of identical apparatus. Wireless telecommunications in the radio portion of the electromagnetic
20 spectrum are local to each radio transceiver in each apparatus. Wireless free space optical telecommunications transpire between the optical transceivers of apparatus that are physically proximately located. Telecommunications are thus not only routed between the radio and the optical portions of the electromagnetic
25 spectrum, but are also second-routed between a number of free-space optical paths (all of which paths are, or course, in the optical portion of the electromagnetic spectrum).

This first aspect of the present invention may be equivalently considered to be embodied in a dual-spectrum telecommunications method. In the method a locally wirelessly
30 telecommunicated signal of a first frequency (i.e., radio) is telecommunicated in a first-frequency local transceiver. A number of locally wirelessly telecommunicated signals of a second frequency (i.e., optical) are telecommunicated in a plurality of
35 directional transceivers suitable to this second frequency, which is higher than the first frequency. Conversion is performed between the first-frequency wirelessly telecommunicated signal

- 12 -

at the first-frequency local transceiver and a second-frequency wirelessly telecommunicated signal at a selected one of the plurality of second-frequency local transceivers. Which particular one of the second-frequency local transceiver is so selected, and converted, is in accordance with a system-wide protocol for telecommunicating along a chosen directional path. Meanwhile second-frequency (i.e., optical) signals locally telecommunicated at any one of the plurality of second-frequency local transceivers are cross-coupled to another one of the plurality of second-frequency local transceivers, thereby to advance the second-frequency signal along a chosen directional path that is also in accordance with the protocol.

By this method, and even though all transceivers are local, the first-frequency signal is immediately converted to a second-frequency signal, and is further telecommunicated, whensoever and wheresoever received. Meanwhile the second-frequency signals are further telecommunicated along a chosen directional path.

3. Second Aspect of the Invention: A Telecommunications Method Upon a Mesh Network

In accordance with a second aspect of the present invention, a telecommunications method is conducted upon a mesh network of arrayed nodes. The method includes (i) wirelessly locally radio telecommunicating to a radio transceiver at a node by radio, and (ii) wirelessly locally directionally optically free-space telecommunicating to each of a plurality of optical transceivers, co-located with each other and with the radio transceiver at the node, by a plurality of directional free-space optical signals.

Telecommunications to and from the radio transceiver are routed to and a selected one of the plurality of optical receivers. The optical receiver is so selected in accordance with a protocol for telecommunicating along a chosen path upon the mesh.

Meanwhile, telecommunications received at one or more of the plurality of second-frequency local transceivers at the same node are routed to another one or ones of the plurality of second-frequency local transceivers. By this routing telecommunications

- 13 -

is established and maintained along a path upon the mesh that is chosen in accordance with the protocol.

The wireless local radio telecommunicating is preferably by broadband radio in a broadband radio transceiver. Moreover, the radio telecommunicating preferably transpires in accordance with Asynchronous Transfer Mode wireless telecommunications protocol - as does, preferably also, the wireless local optical free-space telecommunicating.

In greater detail, the protocol for all this telecommunicating along a chosen path upon the mesh is developed at a node, called an end-office, that is common to all paths. Implementation of this protocol may be shared with selected processors distributed among the arrayed nodes, which processors are upon the chosen path, or may even be done entirely among these distributed processors. If the telecommunicating device at the telecommunicating cell identifies itself as roaming, or commences to roam, then the implementation of the protocol may even be distributed among all the processors of all the arrayed nodes of the mesh.

This may sound more complex than it is. All that happens is that a virtual path is established between communicating entities on the net. The only pertinent questions are: (i) where and how is this virtual path established; and (ii) which nodes need to know about the virtual path so established? Establishing such a virtual communication path is routine in cellular telephony -- although the present invention is the first instance, as will be explained, to conventionally so compute and to so use a virtual path that lies in substantial part upon a mesh network. The answers are: (i) at the end office, and (ii) some selected nodes, up to potentially all nodes. It is in particular not troublesome that, in the case of a roaming radio transceiver, a node upon the mesh which node is physically remote from that node where the radio transceiver is currently located should, nonetheless to this node's current non-involvement in the current communications path, keep track of a virtual path which would, if the roaming radio transceiver was someday to enter this node, permit of communication upon the mesh because, after all,

resource is only consumed when the virtual communications path becomes a real communications path. If an extremely large number of virtual paths were to be constantly dynamically established and re-established upon the net such as might be due, for example, to thousands of simultaneously roving radio transceivers (for example, cellular telephones), then the communication and simultaneous maintenance of associated thousands of virtual paths at and upon all the nodes of the net could result in a communications control "overhead". However, it must be realized that the vast number of radio transceivers are not roaming, and are instead stationary or semi-stationary in single cells comprising buildings or the like. Consequently, there is no insurmountable challenge to calculating and to maintaining all necessary virtual, and to exercising all real, communications paths.

4. Third Aspect of the Invention: A Telecommunications Station, Called a "Base Station"

In accordance with a third aspect of the present invention, a telecommunications station, called a "base station", is located within both (i) a radio cell, and (ii) a multi-hop free-space optical telecommunications mesh of a large number of identical base stations geographically dispersed.

Each such base station includes (i) a communications switch, (ii) a radio transceiver, electrically connected to the communications switch, for wirelessly telecommunicating by radio locally externally to the base station, and (iii) a number (preferably four, at each point of the compass) of optical transceivers, electrically connected to the communications switch, for wirelessly telecommunicating externally to the base stations by associated free-space optical links.

A (iv) controller causes the communications switch to route (i) telecommunications traffic received by the radio transceiver to the optical transceivers, and (ii) also optical telecommunications traffic received at one optical transceiver to another optical transceiver for free-optical optical transmission.

- 15 -

All this routing, and all this telecommunicating, is to the consistent purpose and end that telecommunications traffic to and from the radio transceiver (i) is first routed through a co-located optical transceiver and (ii) is then further routed through the optical transceivers (of whatsoever number of other base stations as are required) until reaching a selected optical transceiver of a particular base station (called an "end office" base station).

Accordingly, radio and free-space optical communications upon the mesh support telecommunications between, on the one hand, (i) a radio transceiver of a base station and, on the other hand, (ii) a optical transceiver of the particular base station called the "end office".

The "end office" base station has a communications switch connected to a communications backbone external to the system. Other "end-office" base stations also connect to this communications backbone.

A number, typically four, of optical transceivers that are electrically connected to the "end-office" communications switch wirelessly optically externally telecommunicate. They do so in order to (i) receive across the free-space optical telecommunications links the telecommunications traffic received by all the radio transceivers of all the base stations, and in order to (ii) transmit telecommunications traffic received from the communications backbone to a particular radio transceiver of a particular base station.

A controller causes the "end-office" communications switch to route communications traffic between, on the one hand, the wired connection to the external communications backbone and, on the other hand, the plurality of "end-office" optical transceivers.

By this operation both (i) radio, and (ii) free-space optical telecommunications are bi-directional between the end-office and each radio transceiver of all base stations.

5. Fourth Aspect of the Invention: A Telecommunications System
In accordance with a fourth aspect of the present invention,

- 16 -

the "base station" and the "end office" telecommunications stations just discussed in the previous section 3 can be combined into an entire telecommunications system.

In such a telecommunications system an "end-office" includes
5 (i) a communications switch, (ii) a hardwired connection between the switch and a communications backbone external to the system to which communications backbone other end-offices also connect, (iii) a number of optical transceivers, electrically connected to the communications switch, for telecommunicating externally
10 to the end-office optically through free space, and (iv) a controller for causing the communications switch to route communications traffic between the hardwired connection to the external communications backbone and the plurality of optical transceivers.

15 This "end office" is used with, and as a part of, a multi-hop mesh of radio-telecommunicating and optically-free-space-telecommunicating "base stations". Each "base station" includes (i) a communications switch, (ii) a number of optical transceivers, electrically connected to the communications
20 switch, for wirelessly telecommunicating externally to the base station by free-space optical links, and (iii) a controller for causing the communications switch to route received optical communications traffic from a receiving to a transmitting optical transceiver. The routing is to the purpose and the end that
25 telecommunications traffic at any individual base station will be free-space optically communicated though whatsoever number of base stations is required until it is telecommunicatively connecting to the "end office" (and then to the communications backbone).

30 Notably, and as is characteristic of meshes, the free-space optical communications upon the mesh are variably routed from one base station to another.

To this mesh optical telecommunications system -- which is already arguably of an interesting form employing as it does both
35 free-space optical links and dynamic link routing -- the present invention preferably makes the momentous addition of cellular radio.

Such an "enhanced" telecommunications system is, of course, a multi-hop mesh of optically-free-space-telecommunicating base stations that are additionally radio-telecommunicating. Each of these radio-telecommunicating and optically-free-space-telecommunicating base stations has, in addition to its communications switch and its optical transceivers and its controller, certain additional components.

Namely, a radio transceiver is electrically connected to the communications switch for wirelessly communicating by radio externally to the base stations. When this radio receiver is present the controller is further causes the switch to route communications traffic between the radio transceiver and the optical transceivers.

More particularly, the controller causes the communications switch (i) to route telecommunications traffic between the radio transceiver and the optical transceivers, and (ii) to route received optical communications traffic from a receiving to a transmitting optical transceiver. All routing is to the purpose and the end that local telecommunications traffic at the radio transceiver is free-space optically communicated step-wise regionally through the optical transceivers of whatsoever number of base stations are required to and from the end office, and upon the communications backbone. In this manner, radio telecommunications local to one base station are free-space optically telecommunicated upon the mesh until ultimately communicatively interconnecting to the communications backbone - the forte of the present invention.

6. Fifth Aspect of the Invention: A Hybrid Telecommunications System

By this time it should be clear that the present invention is most significantly manifest in a telecommunications system (i) where some telecommunication is local within a cell (normally at a lower frequency, typically radio) and (ii) where some, related and continuing, telecommunication transpires upon the links of mesh network (normally at higher frequency, and typically upon free space optical links).

- 18 -

The present invention is thus found in a hybrid telecommunications system typically having both (i) radio telecommunications, and (ii) optical telecommunications. Such a hybrid telecommunications system is characterized in that telecommunication from each of a great multiplicity of end users into the system is by cellular radio at a one of a plurality of hierarchical cell levels. A user radio transceiver that is unable to telecommunicate into the system at a lower cell level will attempt to communicate into the system at a next higher cell level and so on until access is finally obtained.

If and when cellular radio telecommunications access is achieved at a lowest system level, which is overwhelmingly the most common case, ensuing telecommunications will transpire across optical links organized as a mesh. Optical links at each node of the mesh direct merge such individual cellular radio telecommunications as may be from time to time accessed at that node of the mesh into other optical communications traffic carried upon the mesh. This continues until, optical communication links having been joined throughout the mesh, the cellular radio telecommunication at each node is ultimately communicatively interconnected to a central, end-office, node or the mesh.

If the cellular radio communications access transpires at a system level other than the lowest, then the ensuing telecommunications signals will be carried directly between the station where access is achieved and the end-office switch by means of a conventional point-to-point communications link such as wire, fiber, or directed radio beam.

Telecommunication with at least some (and normally all) optical links (as do access cellular radio telecommunications) preferably transpires by free space optical links. Communication with the central node or end-office is, in addition to optical communication links upon the mesh, preferably also by fiber optic cable.

The present invention may similarly be found in a hybrid radio and optical telecommunication method that includes in the same telecommunications system both (i) telecommunicating by

radio, and (ii) telecommunicating by optics. Such a method is characterized in that each of a great number of end users telecommunicate into the telecommunications system by cellular radio at a one of a plurality of hierarchical cell levels. A user radio transceiver that is unable to telecommunicate into the system at a lower cell level will attempt to communicate into the system at a next higher cell level and so on until access is finally obtained.

After cellular radio telecommunications access to the system is so finally obtained, telecommunicating will then most commonly transpire across optical links organized as a mesh; the optical links at each node of the mesh merging such local cellular radio telecommunications as is from time to time accessed at that node into other optical communications traffic carried upon the mesh until, optical communication links being joined throughout the mesh, cellular radio telecommunication at each mesh node is ultimately communicatively interconnected to a central node, or end-office.

7. Sixth Aspect of the Invention: A Virtual Communications Upon a Mesh Network, Particularly as Exists in Free Space

The present invention employs a routing algorithm of a conventional nature to establish a virtual connection path between two communicating entities -- a terminal device at a base station and a home office -- so that Quality of Service (QOS) for the entire network is maintained. (If it is impossible to establish a communications path while maintaining minimum QOS, communications is normally denied.) For the communications routing back and forth between each base station and the end office, all connections are virtual, or "virtual connections". The route selection process, or algorithm, establishes these virtual connections.

At the onset, it may be noted that the communications traffic that is carried upon the communications paths between each base station and the end office is of nature, typically voice or digital data, that has heretofore been carried to the end-user on dedicated lines or links called "pipes". As just

- 20 -

stated, the present invention is opposite, establishing and using virtual trees, and virtual connections, for all communications between base stations and the end offices.

In so doing, the present system is somewhat reminiscent of cellular telephony, where connections in the form of pipes of a limited duration are established and re-established as a telecommunicating device roams within a telecommunications area. There are differences, however. To the best knowledge of the inventor, the present invention is the first to ever contemplate establishing, and using, virtual connections on a mesh network, particularly one that is (i) in free space and/or such as may be implemented by (ii) free-space optical links and/or millimeter wavelength radio.

Moreover, some of the links of the mesh network (as are associated with some one or some few of the base stations) may permissibly be, as has been explained, a direct optical, or a radio, or a wire, or a fiber, link between some base station and an end office. (To the extent that the link is wire or fiber, then to that extent the mesh network is no longer 100% "free space".) Notably, the virtual connectivity principle of the present invention still holds true. Virtual connections are readily made upon mesh networks having different links, including even such wire and fiber links as have heretofore been inflexibly associated with pipes, just as surely (and easily) as they are made upon mesh networks uniformly consisting of only free-space optical, or millimeter wavelength radio, links. Therefore the present invention will also be realized to occasionally use types of communications channels associated with pipes -- i.e., wire and optic fiber -- in a virtual communications network where these channel types have not previously been found.

Therefore, the present invention may be considered to be embodied in a communications system having a mesh network communicatively interconnecting a multiplicity of communication switches, and logic for establishing virtual communication paths upon the mesh network between ones of the multiplicity of communication switches. The communications system's mesh network preferably telecommunicatively interconnects the multiplicity of

communication switches, typically (but not exclusively) by and on free-space telecommunications links that may typically (but not exclusively) be free-space optical telecommunications links and/or free-space millimeter wavelength radio telecommunications links.

The logic establishing virtual communication paths upon the mesh network between ones of the multiplicity of communication switches so establishes the virtual communications links in form of a tree (the virtual communication paths from the multiplicity of communication switches focusing to a root node communication switch called an end office).

The logic for establishing virtual communication paths upon the mesh network between ones of the multiplicity of communication switches may be (i) located at the end office, (ii) distributed between the end office and some other ones of the multiplicity of communication switches or (iii) distributed between among all the multiplicity of communication switches.

These and other aspects and attributes of the present invention will become increasingly clear upon reference to the following drawings and accompanying specification.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a diagram of a multi-tier radio-access telecommunications system in accordance with the present invention; three tiers are illustrated.

Figure 2 is a diagram of the optical interconnection of picocells by and within a dense optical mesh in the multi-tier radio-access telecommunications system in accordance with the present invention previously seen in Figure 1.

Figure 3a is a schematic block diagram of a first embodiment of a base station apparatus used within each picocell of the multi-tier radio-access telecommunications system in accordance with the present invention previously seen in Figure 1.

Figure 3b is a diagrammatic view of a typical installation of the first embodiment of the base station apparatus previously

seen in Figure 3a.

Figure 3c is a diagrammatic view of a typical installation of a second, millimeter wavelength radio linked, embodiment of a base station apparatus.

5 Figure 3d is a diagrammatic view of a typical installation of a base station apparatus similar to that of Figures 3a and 3b, or Figure 3c, now installed in an end office, the apparatus having when so installed wired connection to communications switching equipments which are in turn connected to a world-wide
10 wire/fiber line backbone.

Figure 4 is a diagram of the optical mesh, including end-office links, by which optical interconnection of picocells transpires in the multi-tier radio-access telecommunications system in accordance with the present invention.

15 Figure 5 is a diagram of the optical mesh, including one end-office link, previously seen in Figures 2 and 4; equal-traffic "zones" to the end-office link being illustrated.

Figure 6 is a diagram of a regular rectangular optical mesh, including multiple end-office links, by which optical
20 interconnection of picocells transpires in the multi-tier radio-access telecommunications system in accordance with the present invention.

Figure 7a is a diagram of a first case, wherein message traffic is restricted within a domain, of message traffic
25 occurring on the regular rectangular optical mesh previously seen in Figure 6.

Figure 7b is a diagram of certain particular, cross, links arising in the first case of the message traffic restricted within a domain previously seen in Figure 7a.

30 Figure 8, consisting of Figure 8a through Figure 8d, are diagrams of a second case, wherein message traffic is restricted within a quadrant, of message traffic occurring on the regular rectangular optical mesh previously seen in Figure 6.

Figure 9, consisting of Figure 9a through Figure 9c, are
35 diagrams of a third case, wherein message traffic is restricted within a semi-quadrant, of message traffic occurring on the regular rectangular optical mesh previously seen in Figure 6.

Figure 10a is a diagram of a first virtual connection tree for the optical mesh, by which optical mesh optical interconnection of picocells transpires in the multi-tier radio-access telecommunications system in accordance with the present invention.

Figure 10b is a diagram of a second virtual connection tree for the optical mesh, alternative to the connection tree of Figure 10a, by which optical mesh optical interconnection of picocells transpires in the multi-tier radio-access telecommunications system in accordance with the present invention.

Figure 11 is a graph of the power budget of an optical link on the optical mesh of the multi-tier radio-access telecommunications system in accordance with the present invention.

Figure 12 is a graph of the bit error rate and an optimal threshold, OOK modulation being employed, of an optical link on the optical mesh of the multi-tier radio-access telecommunications system in accordance with the present invention.

Figure 13 is a graph of the atmospheric absorption at 2 km above sea level of an optical link on the optical mesh of the multi-tier radio-access telecommunications system in accordance with the present invention.

Figure 14 is a graph of the visual range compared to attenuation at 800 nm wavelength for an optical link on the optical mesh of the multi-tier radio-access telecommunications system in accordance with the present invention.

Figure 15 is a graph of the attenuation due to rain (at 800 nm wavelength) for an optical link on the optical mesh of the multi-tier radio-access telecommunications system in accordance with the present invention.

Figure 16 is a graph of the attenuation due to snow (at 800 nm wavelength) for an optical link on the optical mesh of the multi-tier radio-access telecommunications system in accordance with the present invention.

Figure 17 is a graph of the scintillation effect on beam

intensity for an optical link on the optical mesh of the multi-tier radio-access telecommunications system in accordance with the present invention.

Figure 18 is a graph of the wind bending effect on the support poles for an optical link on the optical mesh of the multi-tier radio-access telecommunications system in accordance with the present invention.

Figure 19 is a diagrammatic view of the preferred embodiment of a base station optical transceiver on the optical mesh of the multi-tier radio-access telecommunications system in accordance with the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENT

The basic approach to a multi-tier radio-access telecommunications system in accordance with the present invention is discussed in section 1. Section 2 contains a discussion of considerations in routing signals upon the optical mesh. Section 3 contains a description of the handoff of signals, and explains the concept of an embedded virtual connection tree. Section 4 contains descriptions of exemplary radio and optical links of the telecommunications system of the present invention, along with some representative calculations of system's capacity and of the performance margins of its optical links.

1. Description of the Multi-tier Radio-access Telecommunications System

A multi-tier radio-access telecommunications system in accordance with the present invention where large radio cells are superimposed upon smaller radio cells in a multi-tiered hierarchy (three tiers are representative, and illustrated) is depicted in Figure 1. Each of many picocells 1 (tier 1) is created by a small, premises-based or near-premises-based, base station (to soon be shown in Figure 3). Subscribers normally attach for communicating via their home or office base station and, through

- 25 -

this base station, enjoy complete freedom to roam within the home or office environment and, to some extent, externally to the building as well.

5 If a subscriber should leave the area served by his or her home or office base station, then service is handed to either the base station serving the adjacent building, if there was to be no gap in coverage, or else to the base station of one of a number of standard cells 2, the service domain of each which spans from zero to many picocells 1. Finally, if a user should
10 enter some environment serviced neither by any of the standard cells 2 nor by any picocells 1, then service is extended via one of a number of megacells 3, having a range of coverage that spans zero to many standard cells 2. Service among megacells 3 is contiguous.

15 The tier-1 base station may be, essentially, an item of consumer electronics that is either sold or leased to the residential or business subscriber. Alternatively, the tier-1 base station may be owned by the service provider and installed on property owned or leased by the service provider. If a
20 subscriber places a call through his or her own subscriber unit, billing for the service will be to that unit. If the subscriber places a call through a neighboring subscriber unit, then the subscriber's terminal equipment (e.g., his or her cellular telephone), must request third party billing at call set-up time
25 so that the home subscriber unit, and not the neighboring unit servicing the call, will be billed for service. Hand-off is fully supported, both among peer cells at the same tier and among cells at different levels in the hierarchy.

30 The primary purpose of tier 1 is to provide adequate capacity to serve most users, thereby dramatically reducing the demand placed upon tier 2. Selected base stations at tier 2 connect directly to core, or end-office (network) switches 12, as shown in Figure 1. Understand that Figure 1 is a schematic
35 diagram, and not a physical map. The end-office switches 12 are commonly physically located directly among the picocells 1 that they serve to communicatively interconnect. However, since tier 1 base stations are residential or office units, new means must

be provided to interconnect these stations to the core network.

As shown in Figure 2, these new means include short, free-space, bi-directional optical links interconnecting the tier-1 base stations in a rich optical mesh. Each tier-1 base station thereby serves two functions. First, it accepts information from (and delivers information to) each terminal unit within its footprint service area (a one of the picocells 1) via radio. Second, it serves as a cooperating relay station, accepting information (in the form of addressed data packets, possibly ATM cells) from in-bound optical links and routing such information onto the correct outbound optical link.

As shown in Figure 3a, the apparatus of a tier-1 base station includes (i) several optical transmitters and receivers, or optical transceivers 112, (ii) the radio and baseband equipment illustrated as receive antennas and demodulator 111, (iii) a small electronic packet switch, preferably an ATM switch 112, and (iv) a small control processor 114 to manage the base station and serve as the local representative of the network control system. The radio equipment 111 includes all apparatus needed to accept/deliver signals from/to the ATM switch 113 and deliver/accept these to/from the antennas 111 (partial).

Figure 3b is a diagrammatic representation of the physical installation of the apparatus of the base station as it might be installed in the attic of a home. The optical transceivers 112 are located in free space outside any building. The remaining radio and baseband equipment 111, ATM switch 113 and control processor 114, including the baseband antenna 111 (partial) are normally housed inside a building, and are represented by the labels "electronics" and "antenna".

An equivalent diagrammatic view of a typical installation of a second, millimeter wavelength radio, embodiment of the base station apparatus is shown in Figure 3b. Everything is the same as in Figure 3b except radio transceivers 112a (operative in millimeter wavelength radio spectral regions, and not to be confused with the baseband radio 111) replace the optical transceivers 112 (shown in Figures 3a and 3b).

Each transceiver of the optical (Figures 3a, 3b) or

millimeter wavelength radio (Figure 3c) types communicates, normally by line of sight, to a transceiver of a like type.

5 A diagrammatic view of a typical installation of a base station apparatus similar to that of Figures 3a and 3b, or Figure 3c, as is now installed in an end office switch 12 (shown in Figures 1 and 2) is shown in Figure 3d. The apparatus so installed has a wired connection to conventional (end-office) communications switching equipments. These equipments which are in turn connected to a world-wide wire/fiber line backbone.

10 Returning to Figure 3a, the packet, or ATM switch 113 is needed so that, in addition to serving as source and sink of the traffic placed onto the optical network, each base station can relay (hop) packets from one optical link to the next. These multi-hopping transmissions occur along a route (a set of links)
15 chosen at connection set-up time so as to maintain Quality-of-Service (QoS) guarantees. Each packet hops along successive links in accordance with information contained within the packet until it arrives at an entry/exit port of the core network (for packets traveling along the access network toward the core network), or else at the terminating tier-1 base station (for
20 packets being distributed from the core network to the tier-1 base stations of the access network). Multi-hopping is important to permit use of very short free-space optical links as are needed to insure freedom from atmospheric disturbances and good link availability, and as are needed in certain areas to overcome
25 obstacles such as hills and buildings.

The preferred dimensionality of the packet (or ATM) switch is at least 5 x 5, so that, in addition to the signals arriving from/ being sent to the radio interface, at least four optical
30 transceivers can be supported. Note that this small packet switch is normally an electronic switch; both radio and optical packets are first converted to baseband electronic signals prior to switching, as in most multi-hop arrangements.

35 The multi-hop architecture is well-known within the field of multi-wavelength optical networks. However, its present application to free-space optical networks is believed to be novel, as is the overall approach whereby tiers of base stations

are created, the lowest tier being interconnected by a new free-space optical network so as to avoid local wireline bottlenecks. See A. S. Acampora, A Multichannel Multi-hop Local Lightwave Network, Conference Record, 1987, Globecom, Tokyo; and C. A. Brackett and A. S. Acampora, et al., A Scalable Multiwavelength Multi-hop Optical Network, IEEE J. Lightwave Tech., Vol. 11, No. 5/6, May/June 1993.

The actual interconnection pattern of the optical interconnection network in accordance with the present invention may be that of a recursive grid, a quasi-rectangular mesh in which nesting of access stations (tier-1 base stations, in the present case) into sub-levels is permitted so as to make possible the easy addition of new access stations (modular growth) without disturbing any more than one pre-existing link. See A. S. Acampora, The Scalable Lightwave Network, IEEE Comm. Mag., Vol. 32, No. 12, Dec. 1994; and A. S. Acampora, Architectures for Hardware and Software Scalable Multiwavelength Networks, Photonics Networks, Kluwer Academic Publications, 1997.

An additional benefit of the recursive grid is its compatibility with existing scalable routing algorithms, meaning that the computational complexity associated with the establishment of a multi-hop route for a new virtual connection scales but linearly with the number of nodes in the grid. That is, the computational complexity per node is independent of the number of nodes. Since, for the purposes of this specification disclosure, any topology can be chosen for the optical mesh, the interested reader is referred to the literature for additional information concerning general background to the recursive grid.

Multi-hop routing for the preferred radio access system of the present invention is easiest to explain assuming fixed-point service, that is, with no handoff; routing with hand-off will be covered in Section 3. For fixed-point service, the route either to or from a given base station -- which route will be taken by the packets associated with a given virtual connection flow -- is comprised of a sequence of links chosen by an Admission Controller at call set-up time. When choosing this route, the Admission Controller must guarantee that all Quality-of-Service

(QoS) objectives are met. This means not only that each optical link in the sequence can accommodate the new virtual connection without unacceptable QoS degradation but, also, that the terminal radio cell can accommodate the new virtual connection. If hand-off is supported (both among clusters of picocells, and between picocells and standard cells), then, as will be explained in Section s, the admission decision must also guarantee that the overall traffic intensity (new calls plus pre-existing calls) presented to the cell cluster remains acceptable.

Signaling for new connection requests is handled in a quite conventional fashion. Namely, a permanent signaling virtual channel connection exists between each base station and a control computer located within the end-office. When the control computer receives a request for communications from, or to, a (radio-telecommunicating) subscriber device at a subscriber base station, then it calculates the multi-hop routing of packets on the optical network to establish this communication. In this regard the control computer is functioning no differently than a standard (wired) telephone network switching computer, or at least those that manage communications over multiple paths that offer redundancy.

Finally, to vastly improve dependability of the free-space optical mesh, a set of back-up virtual routes is established at the time that the admission decision is made. The back-up routes are established so that, in the event of a link failure or transient interruption of the optical beam, alternate routing can be instantaneously effected with minimal information loss. In general, virtual resources must be reserved on each optical link to accommodate instantaneous alternate routing. Although this back-up routing can readily be realized simply by devoting more system resource to each communications path (consider, for example, that two complete paths might be established at each admission decision), optimization of this back-up remains an open issue not addressed in this specification disclosure. Back-up routing would preferably involve the selection of primary and alternate routes so that, in the event of a single link failure, the additional traffic burden placed on the surviving links would

be minimized, that is, the virtual resources reserved for failure recovery should comprise only a small fraction of a link's capacity. This suggests that primary and alternate routes be chosen such that in the event of a link failure or transient
5 disruption, the re-routed traffic be smeared over as many disjoint paths as possible.

2. Routing in the Optical Mesh

Of primary consideration to the flow of traffic along the links of the optical mesh is the avoidance of traffic bottlenecks
10 or "hot" spots. The situation depicted in Figure 4 is drawn for a simple topology in which the optical mesh consists of a rectangular grid and each cross-point represents a single tier-1 base station.

A portion of the tier-1 access network is shown in Figure
15 4. The purpose of this portion is to deliver traffic generated within the picocells to the end-offices (of which two such are illustrated), and to distribute traffic from the end-offices to the picocells. Each end-office attaches to some number of neighboring tier-1 base stations by means of short free-space
20 optical links. Note that the base stations that are connected to an end-office need an additional optical transceiver beyond the number needed by other base stations.

To maintain their dependability, the optical links must be kept short, and the number of base stations connected to an end-
25 office is correspondingly limited. The objective is to route each virtual connection such that the flow of traffic is evenly distributed among the limited number of optical links leading directly to/from an end-office.

Some simple calculations are in order. Suppose that all
30 picocells generate the same level of traffic intensity, C , and suppose that each end-office is responsible for N base stations. Let each end-office be equipped with L optical links. Then, assuming that traffic can be "balanced" among these L links each must handle a traffic intensity $C_L = NC/L$. (Note that, in
35 general, other optical links will handle a lesser traffic intensity since, in the preferred multi-hopping arrangement, the

traffic handled by the optical links grows as traffic is relayed toward the end-offices).

A traffic intensity $C_L = NC/L$ provides a "best case" relationship among the number of optical links needed per end-office (L), the multi-hop capacity deflator (C_L/C , the ratio of the required link capacity normalized by the delivered user or picocell capacity), and the number of picocells supportable by an end-office. It is the objective of routing in the optical mesh to "smear" so that this traffic relationship applies as best as is possible. While "optimum" routing should be considered to be an open research problem, some simple observations and heuristics permit developing reasonable approach to routing..

2.1. A "Zoned" Approach to Routing

First, it is possible to define a δ zone associated with each "finger"; or optical link, emanating from an end-office. Referring to Figure 5, a zone is defined to be a set of base stations chosen such that (1) traffic associated with all base stations of a given zone enters/exits the end-office through a common finger, and (2) the same traffic intensity is associated with all zones.

The objective of the routing algorithm, then, is to choose a route for each new call attempt such that all traffic associated with a given zone enters/exits the end-office through that zone's finger. Such zones may be permanently defined based on the average traffic intensity presented by each picocell. Alternatively, to achieve better routing efficiency, zones may be dynamically defined in response to instantaneous traffic patterns. For example, in the latter case, the zone associated with a currently lightly-loaded finger might be adaptively enlarged to include a greater number of base stations, while the zone associated with an adjacent heavily-loaded finger might be reduced to include a smaller number of base stations, such that, for future calls, it is more likely that a route will be chosen through the lightly-loaded finger. Then, as new virtual connections are made and old ones are terminated, the boundaries of the zones will continuously adapt in an attempt to maintain

load balance among the fingers.

Note that, with such a "zoned" approach, traffic originating or terminating within a base station at the boundary of two zones may be bifurcated to best achieve load balance. In a similar spirit, traffic originating or terminating within a base station on the boundary of two zones served by two different end-offices may be bifurcated among those offices (furthermore, when adapting the "footprint" of a zone to the prevailing traffic, a given base station can be re-assigned, for future calls, to a different end-office if this will facilitate load balancing).

Note further that the geometrical boundaries of the zones may be quite irregular. It is the intent to capture a common traffic intensity within all zones (for permanently assigned zones), and to tailor the zonal boundaries to the remaining available capacity of the fingers (for dynamically assigned zones). Both the traffic generated within a given picocell, and the geometrical deployment of picocells, are very much demographically dependent. In general, one should not expect uniform spacing of the picocells as might be (incorrectly) implied from Figure 5, which is intended only to show a connectivity pattern among cells but which does not speak at all to their spacing.

Finally, note also that the richness of the mesh, the possibility of bifurcating traffic among fingers and end-offices, the ability to enter/exit an end-office via any of several fingers, and the ability to select alternate routes, collectively provide substantial protection against disruption of an optical link or a set of links (either as a result of equipment failure, atmospheric impairment, or transient interruption of an optical beam due, perhaps, to a migrating bird!). It is envisioned that, as part of fault management, a diagnostic routine should be continuously executed which permits the base stations to rapidly sense disruption of an optical link and to initiate corrective action (alternate routing). Not only can the surviving optical links be used to communicate management and control commands during the restoration phase subsequent to link disruption but, if necessary, the radio interfaces can also be used to deliver

these fault management messages.

2.2 Conditions for Avoiding "Hot" Spots on the Mesh

One problem associated with the zoned approach just described in the previous section 2.1 is its loss of trunking efficiency; if the finger associated with a given zone is loaded to capacity (meaning that no additional virtual connections can be added without unacceptably degrading the QoS guarantees) even though adjacent fingers are underutilized, it is not possible (at least with fixed zones) to accept additional traffic generated within the zone associated with the fully loaded finger at another finger. Thus, virtual connections that might have been accepted by an underutilized finger will be blocked.

Consequently, it is useful to examine conditions under which better trunking efficiency might be realized. In fact, there exist some simple conditions under which a routing algorithm may ensure that the loading of all optical cross-links not leading directly to an end office (the "mesh links") is always less than the loading on an optical link that does lead directly (the "direct links" or "fingers") to an end office. In such a case, a simple Erlang blocking formulae can be applied, independent of the detailed traffic distribution among the picocells.

To begin, consider Figure 6 drawn for a rectangular mesh. Suppose that each direct link has a capacity of C_L virtual cells, and each picocell generates traffic of value $C \leq C_L$. (Alternatively, each picocell may terminate traffic of value $C \leq C_L$; it is readily shown that for either traffic inbound to an end office or outbound from an end office, each bi-directional mesh link is used in only one direction and, therefore, by symmetry, the Erlang blocking formulae are independently applicable for each direction.) Further, assume that each mesh link can carry traffic load of C_L . Let us define each base-station (which forms a picocell) to be a node. The nodes directly connected to an end-office are called "index nodes" (Figure 6). The unit distance between two adjacent nodes is called a "hop". Let us impose the constraint that a node can communicate only with its closest (in terms of the minimum number

- 34 -

of hops) end-office. Then, the rectangular mesh may be subdivided into "domains". A domain consists of an end-office and all the nodes communicating with it. A node may belong to more than one domain if it is equidistant to more than one end-office. The index node, geographically closest to the end-office it is associated with, is called the "primary index node".

Let us now consider Figure 7, in which there are exactly four direct links to the end-office, i.e., the maximum traffic intensity which can be handled by the end-office is $4C_L$. The traffic generated within the domain must be routed to the end-office in the domain. In each "quadrant" of the domain, concentric loops can be drawn as shown in Figure 7a. A "loop" connects nodes along the boundary of a rectangle. If, in any quadrant, the generated traffic is less than or equal to C_L , we can use those mesh links within the quadrant not associated with the mesh links comprising the loop to first route the traffic to the outermost loop in the quadrant. The direct link attached to this loop can then be used to route the traffic to the end-office. If, on the other hand, the traffic generated in a given quadrant exceeds C_L , i.e., is between C_L and $4C_L$, then traffic in excess of C_L can be redirected to neighboring quadrants using the mesh links between the quadrants (not shown in Figure 7). Note from Figure 7b that there will be at least four mesh links leading out of a quadrant and, hence, it is always possible to redirect excess traffic of up to $3C_L$ to the neighboring quadrants, thereby uniformly distributing the traffic among the quadrants. As long as no node generates more than C_L units of traffic, and as long as the total traffic is less than $4C_L$, then the only blocking encountered is due to the direct links being fully loaded. The call blocking probability can then be computed using the Erlang blocking formula given by

$$P_b(\rho, M) = \frac{\rho^M / M!}{\sum_{k=0}^M \frac{\rho^k}{k!}}$$

- 35 -

where the number of available circuits is M and the load is ρ .
In

the above case, if the load generated in the domain is ρ_D , the call blocking probability is given by $P^b(\rho_D, 4C_L)$.

5 Next impose the constraint that all traffic generated within a quadrant must reach the end-office by using only those direct links which lead into that quadrant (Figure 8). Furthermore, the route taken by any call is constrained to lie entirely within the quadrant. Let K be the number of direct links from the end-
10 office into a quadrant. It is essential that the value of K be less than or equal to 5 in order to avoid blockage on the mesh links (to be discussed later).

Now, consider a quadrant is of size $R \times R$. Let $N = \lceil K/2 \rceil$, where $\lceil x \rceil$ is the closest integer greater than or equal x .
15 Suppose that $R \geq N$. In such a case, it is always possible to draw $M = \lceil R/2 \rceil$ loops in the quadrant (sometimes a loop may consist of just a single node). Label the loops as shown in Figure 8a and 8b, with the innermost loop bearing the highest index number, that is, loop $i + 1$ would always lie within loop
20 i . Mesh links which belong to a loop are called loop links, and the mesh links interconnecting loops are called inter-loop links (See Figure 8b).

For this case, we can redistribute the calls by first routing all calls generated by nodes in the inner $M - N$ loops to
25 loop N using inter-loop links (note that these do not belong to any loop). Since the number of inter-loop links from loop $i+1$ to loop i is equal to 4 $(R-2i)$, it is possible to route all calls from the innermost $M - N$ loops onto loop N . Note that, when R is even, the maximum value of i is $(R/2) - 1$, and for this value
30 of i , the number of links out of the innermost loop is eight. If R is odd, then i is at most and the number of links out of the innermost loop will be four. However, since there is exactly one node in the innermost loop when R is odd, it is possible to route calls from the innermost $M - N$ loops to loop N .

35 As an example, in Figure 8b it is possible to route up to $4C_L$ calls (the maximum number which can be generated in loop 3)

from loop 3 to loop 2. Thus, at the conclusion of this process, all the traffic is concentrated on loops 1 through N (the outermost loops). Now, if $K \leq 4$, then the total traffic generated is less than or equal to $4C_L$. Since no traffic has as yet been flowed onto the inter-loop links interconnecting the outermost two loops, these links can now be used to uniformly distribute the traffic among these two loops. (Note that, for this process, no inter-loop link can be used which will subsequently be used to attach an inner loop to the direct link serving that loop. For example, referring to Figure 8a, inter-loop links a and b cannot be used to redistribute traffic among the loops since they will subsequently be used to attach loop 3, via node X, to node Y, which is an index node).

Furthermore, having accomplished this, neither loop carries traffic in excess of $2C_L$ (note that loops are bi-directional). If $K = 5$, the traffic intensity may be as great as $5C_L$ and, in such a case, using an identical procedure, one may uniformly distribute the traffic among loops 1, 2 and 3 (the outermost three loops).

Since it is possible to carry up to $2C_L$ calls on each loop (C_L in the clock-wise direction and the other C_L in the counter-clockwise direction), the entire traffic can successfully be routed to the corner node on the loop, closest to the end-office, without encountering blockage on the mesh links. The inter-loop links connected to this node lead directly to an index node (See Figures 8a and 8b). Thus, using these links, the traffic can now be routed to the end-office.

Note that it may be impossible to distribute traffic uniformly among the outer three loops if the total load generated is in excess of $5C_L$. This is illustrated in Figures 8c and 8d. Let all the traffic be generated by a cluster of nodes at a corner of the quadrant. If a maximum load of $5C_L$ is generated by a cluster of five nodes in a corner of the quadrant, then, since there are five mesh links leading out of this cluster, it will always possible to re-distribute the load (Figure 8c) among the outer three loops as described earlier. However, if a maximum load of, say, $6C_L$ is generated by a cluster of six nodes in a

corner of the quadrant as shown in Figure 8d, then it will be impossible to route this traffic to the end-office without blocking up to C_L calls since there are only five links (at least six links are necessary) leading out of the cluster. Thus, if the number of direct links, K , from the end-office into a quadrant is greater than five, given that the traffic within the quadrant is less than $K C_L$, one cannot guarantee that there will be no blockage on the mesh links. (Note that, this, in turn, implies that there may be up to 20 links total leading out of an end-office).

Now, suppose $R \leq N$. For this case, one may subdivide the quadrant into arcs as shown in Figure 8d (there are 4 arcs shown in Figure 8d). Note that the inner N arcs (an arc may consist of a single node, i.e., the primary index node) are connected to index nodes. It is readily apparent that all the traffic may be routed from the outer arcs to the inner N arcs, and redistributed among these N arcs (using the cross links between arcs), such that if an arc is connected to j index nodes, it carries a traffic of $j C_L$. The total traffic on an arc may then be routed to the end office through the index nodes on that arc. It is to be noted that, again, if $K > 5$, it may be impossible to deliver the traffic to the inner N arcs, due to conditions similar to those described in the previous paragraph.

Thus, we have shown that if the number of links leading directly to an end office, K , is less than or equal to five per quadrant, and are symmetrically arranged as shown in Figure 8a, then call blocking can be computed using the Erlang blocking formula. Let the traffic intensity generated in a quadrant be ρ_q . Referring to Equation (1), the probability that a call is blocked is then equal to $P_b(\rho_q, 5C_L)$.

If the number of direct links from the end-office into a quadrant is six (i.e., the total number of links leading out of the end office is now 24), one can eliminate blocking on mesh links by imposing the additional constraint that routes taken by calls generated within a semi-quadrant (See Figures 9a and 9b), in order to reach the end-office, must be constrained to lie entirely within the semi-quadrant. Adjacent diagonal nodes

belong to different semi-quadrants. Semi-loops may be drawn within a semi-quadrant as shown in Figure 9. Since the number of direct links is 6, at least 3 semi-loops can be drawn in a semi-quadrant (in the limiting case, a semi-loop may have just a column of nodes).

If the maximum traffic generated within a semi-quadrant is less than or equal to $3C_L$, it is possible to distribute the traffic among the three outermost semi-loops such that the traffic carried by any semi-loop is less than or equal to C_L . Note that if the traffic is greater than $3C_L$, blockage may be encountered on the mesh links. For example, let the traffic generated be $4C_L$. If all the traffic is generated in the cluster of four nodes at the corner of the semi-quadrant adjacent to the diagonal (Figure 9a) then, since there are only 3 links leading out of this cluster, C_L calls must be blocked. Thus, the maximum load which can be routed to the end-office without encountering blockage on mesh links within a semi-quadrant is $3C_L$. Referring to Equation (1), the probability of a call being blocked under such constraints is therefore $P_b(\rho_s, 3C_L)$, where ρ_s is the total traffic intensity generated in the semi-quadrant.

3. Cell Hand-Off

Routing in the optical mesh, as described in Section 2, assumes that, for its entire duration, a given virtual connection flows to/from the base station from which it was originally generated over a fixed set of optical links. In reality, since users are free to roam among radio cells, the virtual connections must be "handed off" among radio cells as a user "travels" among a sequence of cells. At the time of hand-off, it is required that (1) a new route be found leading from the newly-serving base station back to the end office, and (2) new routing instructions be provided to the switch contained in each base station along the new route. Implicit in the selection of a new route is the ability to maintain QoS over each link in the new route and within the radio cell accepting responsibility for the hand-off call. Insuring that QoS objectives are met can present a critical real-time processing challenge, especially when hand-

offs occur very frequently such as might be expected in a picocellular system. Delivering new routing instructions to the switches, after QoS has been ascertained, is a further challenge. Both challenges are adequately met by the virtual connection tree.

The basis of the virtual connection tree is the creation, at call set-up time, of a set of virtual connections for that call, each originating from a root node and each terminating in a different base station or leaf (actually two trees are set up: one leading to the root node, one leading from the root node, such that duplex connections can be handled). At call set-up time, an admission controller determines whether or not a new call can safely be admitted to the tree. For a new call to be admissible, it must be determined that on a statistical basis, and as a result of user mobility, the likelihood that too many calls will exist within a leaf of the tree, or flow on any given branch (link) of the tree, are acceptably low. If too many calls exist within a cell or flow on some given branch, then that cell or branch is said to be in overload, meaning that the QoS objectives cannot be met. Overload, then, either causes an unacceptable (but transient) degradation in service (i.e., delay or lost packet objectives are temporarily not met) or causes the call which caused overload to be dropped (as might occur, for example, for real time traffic such as voice). In essence, at call set-up time, the admission controller is making a guarantee: each new user can freely roam among all leaves (base stations) in the tree and, only occasionally (that is, with some guaranteed low probability) will unconstrained motion of the users cause an overload condition to arise. To maintain this guarantee, the admission controller blocks new call requests at some pre-determined threshold.

If a newly-requested virtual connection is admitted, a route in each direction will be chosen by that user.

As applied to our hybrid radio-optical link broadband access network, a connection tree might appear as shown in Figure 10a. Note that the root of the tree is an end-office, and branches of the tree extend to every base station served by that end-office.

Note further that, as shown in Figure 10a, the "fingers" leading to each end-office are "main branches" of the tree, that is, the tree is defined such that the zones of Section 3a are maintained and load-balancing among the fingers is provided for. Finally, note also that since each "leaf" can be reached through any of several "branches", it is possible to choose the "branches" for a newly-requested virtual connection such that (1) each base station is included in the tree and (2) load balancing is achieved among branches at a given distance from the root. Thus, when setting up a tree for a new call, each base station served by a given end-office would be included, but the path leading to each leaf would be chosen such that as users roam among cells, all branches at a given depth from the root node carry, on average, the same traffic intensity.

It is also possible to define the root of the tree as shown in Figure 10b, in which case an ATM switch behind the end-offices serves as the root node for some larger tree, the footprint of which includes the base stations served by several end offices. Also shown in Figure 10b is the inclusion of the base station of a standard cell as one leaf in the tree, so that a user can also choose service from a standard cell if conditions warrant (i.e., if the user has roamed to some vicinity not served by any picocell).

4. Optical and Radio Link Calculations

Discussion in this section demonstrates that, because of the relatively short range of adjacent lasercom transceiver nodes (100-200 meters) envisioned in the picocell network architecture of the present invention, a pico cell free-space optical link, hereinafter called the "lasercom link", can have all weather availability at OC-3 and higher data rates by use of an inexpensive, compact, low power, eyesafe transceiver. Estimates for the target capacity of the radio picocell are also provided.

The overall system performance of a lasercom link is easily quantified using a link budget, the techniques being similar to those used to evaluate microwave links. There are three important parameters, transmitter power, propagation losses, and

- 41 -

receiver sensitivity. The receiver sensitivity relates the amount of optical power needed to maintain the signal-to-noise ratio required to achieve a desired quality of service.

The received signal power can be calculated from:

$$P_R = P_T \eta \frac{A_R}{d^2 \delta^2} e^{-\alpha d}$$

5 where

	P_R	=	received power
	P_T	=	transmitted power
	η	=	optical efficiency
	A_R	=	area of receiving aperture
10	δ	=	angular divergence of the transmitted beam
	α	=	atmospheric attenuation factor, and
	d	=	distance between transmitter and receiver

For relatively clear air the exponential term is small and received laser power scales with $1/d^2$ and $1/\delta^2$; for propagation
 15 conditions of heavy attenuation, such as fog, it scales exponentially.

The amount of background radiation collected by the transceiver is dependent on the receiver's field of view and its optical bandwidth. The field of view cannot be made arbitrarily
 20 narrow due to alignment issues discussed below and the optical bandwidth cannot be made arbitrarily small due to poor absolute transmission through most narrow dielectric filters. The received background power, P_{Back} , is calculated from:

$$P_{Back} = \frac{0.2 \text{ watts}}{m^2 \cdot nm \cdot sr} \cdot A_R \cdot F_{BW} \cdot \delta_{FOV}^2 \cdot N$$

where

m = meters,
 nm = nanometers,
 sr = steradians
 5 F_{BW} = filter bandwidth, and
 δ^2_{FOV} = angular field-of-view

The value for irradiance of the sky was measured at 10 degrees from the sun using a specially calibrated telescope/detector assembly.

10 The noise equivalent power of the detector/preamp module can be calculated from a double-sided noise density usually expressed in watts/√Hz. Figure 11 shows the received signal power P_{rec} , background power P_{back} , and noise equivalent power P_{dark} as a function of range for the following set of parameters:

15	Telescope Diameter	10 cm
	Laser Power	20 mW
	Laser Divergence	2 mrad
	Telescope Efficiency	0.5
	Atmospheric Attenuation	Varies
20	Data Rate	OC-3 (155 Mb/sec)

In order to determine the availability of the link in all weather conditions, an attenuation of 392 dB/km, the worst (and very rarely experienced) fog was assumed in the calculation.

25 The Bit Error Rate (BER) for the PIN detector (a unity gain photodiode) circuit can be calculated using the previously obtained values. See S. G. Lambert and W. L. Casey, Laser Communications in Space, Artech House, Norwood, MA, 1995.

30 This circuit has an overall transimpedance gain of 10^6 . Figure 12 shows the calculated BER versus range for this case. The BER was calculated assuming equally likely ones and zeros and on-off keyed (OOK) modulation with direct detection. The threshold value was chosen at each range point with the criterion of minimizing BER at that point. Clearly the system is capable of very low (equivalent to fiber optic) BER at ranges of 100

meters or less in the most attenuating condition. For the avalanche photodiode detector, the range for a given BER is increased by approximately 15 meters.

5 Eye safety is always an issue when working with laser systems. The wavelength employed here is not inherently eyesafe (i.e., light can pass through the cornea to be imaged on the retina). ANZI standards Z131.1-1986 maintain that the maximum flux entering the eye at this wavelength is 2 mW/cm². See American National Standard for the Safe Use of Lasers, The Laser
10 Institute of American, Orlando, FL, 1986. Transmit laser power of 20 mW implies a transmit aperture of 10 cm² minimum, a criterion easily met by our conceptual transceiver.

Path loss in an optical communications link is affected by atmospheric absorption, scattering, and turbulence, however,
15 the magnitude of each loss mechanism varies greatly. Figure 13 shows sea level atmospheric transmission for a 350 meter path as a function of wavelength calculated using MODTRAN IV. Fortunately, for available semiconductor laser diode wavelengths of 810 nm, 1300 nm, and 1550 nm, path loss is negligible due to
20 molecular absorption. See W. G. Driscoll and W. Vaughan, Handbook of Optics, McGraw-Hill, USA, 1978.

Path loss due to scattering is a function of optical radiation wavelength, number density and size of scatters in the path. In order to quantify the amount of scattering attenuation
25 along a particular path, an approximation based on Mie scattering and visibility range can be used. See W. G. Driscoll and W. Vaughan, Handbook of Optics, McGraw-Hill, USA, 1978. The most severe path losses at near infra red wavelengths come about due to fog. Fog occurs when the relative humidity of an air particle
30 approaches its saturation value. Some of the nuclei then condense into water droplets forming the fog. Figure 14 shows attenuation versus visual ranges up to one km. See W. K. Pratt, Laser Communications Systems, John Wiley & Sons, NY, 1969. Precipitation in the form of rain occurs when the water droplets
35 condense up to millimeter sizes. This causes both scattering and water absorption losses along the path with the size distribution of the drops determining the relative magnitude of these effects.

The difference in fog and water droplet size, three orders of magnitude, accounts for the orders of magnitude difference in attenuation for typical rain (Figure 15) versus typical fog. Additionally, the relatively large size of typical raindrops compared with near infra red wavelengths, permits the drops to forward scatter a significant fraction of incident optical power. Attenuation due to snow has been measured by several groups and is displayed in Figure 16 for snow rates up to one foot per hour. Typically the path loss due to snow lies somewhere between fog and rain, however, the relationship is very complex and is best measured experimentally.

Path loss fading due to scintillation can be very significant (25-30dB) for long range paths through the atmosphere. Scintillation is caused by thermal fluctuations which induce random fluctuations in the index of refraction along the path contained in the beam's cross section. This causes the air to act like sets of small prisms and lenses which deflect the beam of light. In the plane of the receiver a speckle-like pattern appears with light and dark cells which have a characteristic size that scales like the square root of wavelength times path length. The generally accepted form for the probability distribution of the expected intensity is log normal for weak scintillations, however, this tends to saturate at variances near 0.35 for heavily scintillated paths. The log-normal distribution for the intensity and variance of intensity is given by:

$$P(I, \sigma_x^2) = \frac{1}{2I\sqrt{2\pi\sigma_x^2}} \exp \left[-\frac{(\ln I + 2\delta_x^2)^2}{8\delta_x^2} \right]$$

This is plotted in Figure 17 for the calculated variances along 100 meter and 1 km horizontal paths. For the 100 meter case of the pico cell backbone the effect is nearly zero and the

distribution of intensity is Gaussian. For the 1 km case the path is highly scintillated and a typical threshold detection scheme would require nearly 25 dB additional margin of transmitted signal power. Beam wander due to changes in index of refraction is about 0.1 microradians, negligible compared to the two milliradian beam divergence for the pico cell backbone system considered here.

A final issue to consider is misalignment of the transceivers to each other due to wind or thermal expansion causing an angular displacement of either end of the link. Figure 18 shows the calculated deflection of 10 inch diameter hollow poles made from steel, aluminum, and wood, applied wind pressure of 15 lbs. per square inch, considered hurricane force, and no allowance for aerodynamic flow. For steel and aluminum the deflection angle is not significant compared with 2 milliradians for pole lengths near forty feet. Since we envision much shorter poles, much smaller diameter pipe may be used. Thermal expansion of a three to four story building over temperature ranges of 50 degrees Celsius causes less than 50 microradians of angular displacement, a negligible effect for our case.

Given the previously discussed issues a potential conceptual design for a picocell backbone optical communications transceiver operating at OC-3 data rate (or higher), range of 100 meters or less, all weather operation, and BER of less than 10^{-9} is shown in Figure 19. Since the beam divergences used in this unit are over two orders of magnitude above the diffraction limit, extremely inexpensive plastic optics can be used throughout, and alignment tolerances become very forgiving permitting inexpensive manufacture. The aperture size is four inches making the unit relatively small, and could be made a factor of two smaller without affecting performance significantly. The smaller the transceiver can be made the easier and less expensive it is to build. Another benefit of small size and wide beam divergence is that relatively inexpensive acquisition and alignment systems can be used for potential autonomous alignment and alignment maintenance systems.

- 46 -

Turning now to the radio link, it is reasonable to assume an available spectrum of 10 MHz, equally split between tiers 1 and 2 (tier 3, created by Low Earth Orbiting (LEO) satellites, uses a different spectrum and will not be considered). In tier 1, since the cell diameter is so small, the path loss is low and we can safely consider the use of some higher-level digital modulation, say 16 QAM. Allowing a signaling rate of 1 symbol/sec/Hz, this translates to 20 Mb/s peak rate per picocell. We further envision the use of a smart array processor at the base station which, coupled with admission control, allows, on average, 10 Mb/s per picocell, that is, a peak rate of 20 Mb/s and an effective average frequency re-use factor of 50%.

For the standard cell, more array elements would be used to provide 100% frequency re-use, but the greater path loss limits the modulation to 4f-PSK, and both the peak and average rate within a standard cell are 10 Mb/s.

5. Summary

The present invention is embodied in a system and a method for a general-purpose wireless local access network. The use of very small radio cells with frequency re-use at the lowest tier insures very high bandwidth per subscriber. The use of a dense mesh of short, free-space optical links in a multi-hop arrangement allows signals to flow between picocellular base stations and an end-office, thereby eliminating any dependence on copper and/or optical cabling to the subscriber. Finally, the use of higher-tiered cells insures universal service availability (both from a radio coverage perspective and from a failure recovery perspective). The proposed system can equally well serve fixed-point, pedestrian, and vehicular users; all access is via a high capacity radio link, and handoff among cells is fully supported.

Although the use of free-space optical links might suggest a somewhat less-than-robust service availability, sample link calculations show that the shortness of the link provides excellent immunity against even extreme weather-related impairments. (For longer spans, millimeter-wave radio links may

be considered, but this might substantially escalate the cost of a subscriber's premises-based equipment.) Moreover, the richness of the optical mesh, the high data rate of each link, and the existence of higher-tiered radio cells combine to provide excellent immunity against outage caused by equipment failure. Routing in the mesh can be adapted to prevailing traffic conditions such that optical link bottlenecks as the traffic flows toward the head end are avoided, and the approach is compatible with embedded virtual connection trees to facilitate hand-off while maintaining QoS guarantees for each of several traffic classes (multimedia traffic). Exemplary capacity calculations suggest that 20 Mb/s peak rate, and 10 Mb/s average rate can be provided to each subscriber, and no optical link need operate at a rate exceeding 155 Mb/s.

In accordance with the preceding explanation, variations and adaptations of the telecommunications system and method in accordance with the present invention will suggest themselves to a practitioner of the wireless communication system arts.

For example, narrow band millimeter or microwave radio could be substituted, at a generally increased cost, for some or for all of the optical links of the system. A mesh communication network over a very wide area, or over very rugged terrain, might warrant such a selective substitution of directional millimeter or microwave radio for optical links. If some of the mesh communication links at a single base station are optical, and some are millimeter radio, then the base station is clearly a "hybrid". (Each and any link may be redundant, and may be continually operated redundantly or the communication modes may be substituted for each other depending upon conditions such as atmospheric interference.) If some mesh communication links are optical, and some are millimeter radio, then the system is clearly a "hybrid". These variations are not a problem, and are anticipated by the present invention. Indeed, if some mesh links, whether optical or millimeter radio, prove over time and actual use to be unreliable for certain base stations, then the links may well be substituted for by a link of another type.

Still another type of "hybrid" system is contemplated by

the present invention in that some of the mesh links may be, or may become, conventional copper cable and/or optical fiber. Consider the final links just short of an end office, which links were shown as lines radiating from each end office in Figure 6.

5 If communications traffic, or evolving communications traffic dictates, any or all of these links can be made to be copper cable and/or optical fiber as may generally be made to carry greater communications traffic to an from a particular "sector" relative to the end office then, for example, a standard optical
10 or millimeter radio link.

Still further, any individual one or ones of the base stations may bypass the free-space network altogether, and communicate direct to the end office via (i) radio, (ii) optics, or (iii) copper cable and/or optical fiber. This "hard-wired"
15 base station may serve to communicate only such communications traffic as is associated with its own picocell, or it may continue to mount (in addition to its wire or fiber access) the system standard optical and/or millimeter radio transceivers, using these transceivers to siphon some communications traffic
20 off the mesh and thus helping to ameliorate the communications burden at other base stations and other regions on the mesh. The "hard-wired" base station thus becomes a "constrictor", and just one more of several places where communications traffic can be interfaced to the mesh.

25 Herein lies a great flexibility in the system of the present invention. Clearly it has always been possible to add new base stations (as well as new telecommunicating equipments at existing base stations) to the mesh networks of the present invention as the area, and/or the areal density, of broadband
30 wireless communications expands. The addition of new base stations can be accomplished, of course, without any new copper cables or fiber optics. However, should a new copper cable or a fiber optic be installed to some new or existing base station point in an existing mesh, then increased communications traffic
35 can henceforth flow thru this point without disruption to the existing mesh and existing network.

In accordance with these and other possible variations

and adaptations of the present invention, the scope of the invention should be determined in accordance with the following claims, only, and not solely in accordance with that embodiment within which the invention has been taught.

CLAIMS

What is claimed is:

1. A telecommunications apparatus comprising:
a communications switch;

5 a first transceiver, electrically coupled to the communications switch, for wirelessly telecommunicating externally to the apparatus in a first portion of the electromagnetic spectrum;

10 a second transceiver, electrically coupled to the communications switch, for wirelessly telecommunicating externally to the apparatus in a second portion of the electromagnetic spectrum that is of higher frequency than is the first portion; and

15 a controller for causing the communications switch to first-route telecommunications traffic between the first transceiver and the second transceiver;

wherein wireless telecommunications are first-routed between a first and a second, higher frequency, portion of the electromagnetic spectrum.

20 2. The telecommunications apparatus according to claim 1 wherein the first transceiver comprises:

25 a radio transceiver electrically connected to the communications switch for wirelessly telecommunicating externally to the apparatus in the radio portion of the electromagnetic spectrum.

3. The telecommunications apparatus according to claim 2 wherein the second transceiver comprises:

a transceiver of free-space optical telecommunications signals electrically connected to the communications switch;

30 wherein wireless telecommunications are first-routed between radio and optical portions of the electromagnetic spectrum.

4. The telecommunications apparatus according to claim 2

wherein the second transceiver comprises:

a millimeter wavelength radio transceiver of millimeter wavelength telecommunications signals;

5 wherein wireless telecommunications are first-routed between a first radio portion of the electromagnetic spectrum and a second, millimeter wavelength, portion of the electromagnetic spectrum that is of higher frequency than is the first portion.

5. A telecommunications method comprising:

10 first-telecommunicating a local omnidirectional first-frequency first signal by use of an omnidirectional first-frequency first wireless transceiver;

15 second-telecommunicating a plurality of local directional second signals of a second frequency, higher than is the first frequency, by use of an associated plurality of directional second-frequency second wireless transceivers;

20 converting between (i) the first signal, as is telecommunicated with the first wireless transceiver, and (i) some particular one of a second signals, as is associated with a particular second wireless transceiver, in accordance with a protocol for telecommunicating along a chosen directional path; while

25 cross-communicating between the second transceivers so that all second signals directionally telecommunicated by use of any one of the second transceivers is further telecommunicated by use of another one of the second transceivers so as to advance further telecommunicate each second signal, as well as the converted first signal, along a chosen directional path in accordance with the protocol;

30 wherein, although both first-telecommunicating and second-telecommunicating are of local signals, the omnidirectional first-frequency first signal is immediately converted to a second-frequency directional second signal, and is then further directionally telecommunicated, while the directionally telecommunicated second-frequency signals are still
35 further directionally telecommunicated, along the chosen directional path.

6. The telecommunications method according to claim 5 wherein the first-telecommunicating of the local omnidirectional first-frequency first signal by use of the omnidirectional first-frequency first wireless transceiver comprises;

5 first-telecommunicating a local omnidirectional radio signal by use of an omnidirectional radio wireless transceiver.

7. The telecommunications method according to claim 5 wherein the second-telecommunicating of the plurality of local directional second signals of the second frequency by use of the
10 associated plurality of directional second-frequency second wireless transceivers comprises:

second-telecommunicating a plurality of local directional free-space optical signals by use of the associated plurality of directional free-space optical transceivers.

15 8. The telecommunications method according to claim 5 wherein the second-telecommunicating of the plurality of local directional second signals of the second frequency by use of the associated plurality of directional second-frequency second wireless transceivers comprises:

20 second-telecommunicating a plurality of local directional free-space millimeter-wavelength radio by use of the associated plurality of directional millimeter-wavelength radio transceivers.

9. A telecommunications apparatus comprising:

25 a communications switch;

a broadband radio first transceiver, electrically connected to the communications switch, for wirelessly telecommunicating omnidirectionally externally to the apparatus by broadband radio in a first, radio, portion of the
30 electromagnetic spectrum;

a second transceiver, electrically connected to the communications switch, for wirelessly telecommunicating directionally externally to the apparatus in a second portion of the electromagnetic spectrum; and

a controller for causing the communications switch to first-route telecommunications traffic between the broadband radio first transceiver and the second transceiver.

10. The telecommunications apparatus according to claim 9 wherein the second transceiver comprises:

an optical transceiver wirelessly directionally telecommunicating across free-space optical links.

11. A telecommunications method for and upon a communications mesh network of arrayed nodes, the method comprising:

wirelessly locally radio telecommunicating to a radio transceiver at each node by radio;

wirelessly locally directionally optically free-space telecommunicating between each of a plurality of optical transceivers, co-located with each other and with the radio transceiver at each node, by a plurality of directional free-space optical signals to a plurality of nearby nodes; and

first-routing, at each node, telecommunications to and from the radio transceiver and a selected one of the plurality of optical receivers that is so selected in accordance with a protocol for telecommunicating along a chosen path upon the mesh; while

second-routing, at each node, telecommunications received at one or more of the plurality of local directional optical transceivers to another one or ones of the plurality of local directional optical transceivers so to establish and maintain optical telecommunications along a path upon the mesh that is chosen in accordance with the protocol;

wherein, by the radio telecommunicating and the optical telecommunicating, and by the first-routing and the second-routing, telecommunications transpires (i) omnidirectionally at each node by radio, and (ii) directionally between nodes upon the path upon the mesh by optics.

12. The telecommunications method according to claim 11 wherein the wirelessly locally radio telecommunicating is

by broadband radio in a broadband radio transceiver.

13. The telecommunications method according to claim 11 wherein the wirelessly locally radio telecommunicating is in accordance with Asynchronous Transfer Mode protocol.

5 14. The telecommunications method according to claim 11 wherein the wirelessly locally optically free-space telecommunicating is in accordance with Asynchronous Transfer Mode protocol.

10 15. A telecommunications apparatus, called a base station, located within a multi-hop free-space optical telecommunications mesh consisting of a large number of identical base stations geographically dispersed, each base station of the mesh comprising:

a communications switch;

15 a first transceiver, electrically connected to the communications switch, for wirelessly telecommunicating locally externally to the base station;

20 a plurality of optical transceivers, electrically connected to the communications switch, for wirelessly directionally telecommunicating externally to the base station by an associated free-space directional optical link; and

25 a controller for causing the communications switch to route (i) telecommunications traffic telecommunicated with the first transceiver to one of the plurality of optical transceivers, and (ii) also optical telecommunications traffic received at one directional optical transceiver to another directional optical transceiver for further free-optical optical transmission, all to the consistent purpose and end that telecommunications traffic to and from the first transceiver
30 should be routed through a selected co-located directional optical transceiver and then through the further directional optical transceivers of whatsoever number of other base stations as are required until reaching a particular base station called an end office;

- 55 -

wherein radio and free-space optical communications upon the mesh support telecommunications between, on the one hand, (i) a first transceiver of a base station and, on the other hand, (ii) a particular base station called the end office.

5 16. A communications system comprising:

an end-office having

a communications switch,

a hardwired connection between the switch and a communications backbone external to the system to which communications backbone other end-offices also connect,

10 a plurality of optical transceivers, electrically connected to the communications switch, for telecommunicating externally to the end-office optically through free space, and

a controller for causing the communications switch to route communications traffic between (i) the hardwired connection to the external communications backbone and (ii) the plurality of optical transceivers; and

15 a multi-hop mesh of radio-telecommunicating and optically-free-space-telecommunicating base stations each having

20 a communications switch,

a plurality of optical transceivers, electrically connected to the communications switch, for wirelessly telecommunicating externally to the base station by free-space optical links, and

25 a controller for causing the communications switch to route received optical communications traffic from a receiving to a transmitting optical transceiver to the purpose and the end that telecommunications traffic at any individual base station will be free-space optically communicated though whatsoever number of base stations is required until telecommunicatively connecting to the end office and to the communications backbone;

30 wherein free-space optical communications upon the mesh are variably routed from one base station to another.

17. The communications system according to claim 16 wherein the multi-hop mesh of optically-free-space-telecommunicating base

- 56 -

stations is further of base stations that are additionally radio-telecommunicating, and wherein each of these radio-telecommunicating and optically-free-space-telecommunicating base stations further has, in addition to its communications switch,
5 its plurality of optical transceivers, and its controller:

a radio transceiver, electrically connected to the communications switch, for wirelessly communicating by radio externally to the base stations;

10 wherein the controller is further causing the switch to route communications traffic between the radio transceiver and the optical transceivers.

18. A communications system comprising:
an end-office having

15 a communications switch,
a hardwired connection between the switch and a communications backbone external to the system to which communications backbone other end-offices also connect,

20 a plurality of optical transceivers, electrically connected to the communications switch, for wirelessly telecommunicating externally to the end-office optically through free space, and

25 a controller for causing the communications switch to route communications traffic between (i) its hardwired connection to the external communications backbone and (ii) the plurality of optical transceivers; and

a multi-hop mesh of free-space optically-communicating base stations each having

30 a communications switch,
a radio transceiver, electrically connected to the communications switch, for wirelessly telecommunicating by radio locally externally to the base station,

a plurality of optical transceivers, electrically connected to the communications switch, for wirelessly communicating regionally externally to the base station by free-space optical links, and
35

a controller for causing the communications switch (i)

to route telecommunications traffic between the radio transceiver and the optical transceivers, and (ii) to route received optical communications traffic from a receiving to a transmitting optical transceiver, to the purpose and the end that local telecommunications traffic at the radio transceiver is free-space optically communicated step-wise regionally through the optical transceivers of whatsoever number of base stations are required to and from the end office, and upon the communications backbone; wherein radio telecommunications local to one base station are free-space optically telecommunicated upon the mesh until ultimately communicatively interconnecting to the communications backbone.

19. A communications method comprising:

bi-directionally wire/cable-communicating information between a communications switch at a particular, end-office, site and a hardwired connection to a communications backbone which backbone is external to the end-office site and to which other end-office sites also connect;

end-office-wire/cable-switching the information between the end-office communications switch and a selected one of a plurality of wireless first transceivers, co-located at the end office with and electrically wire/cable connected to the communications switch, where the selected one of the plurality of wireless first transceivers at the end office is so selected in accordance with the information telecommunicated;

first wirelessly-telecommunicating the information through the selected one of the plurality of wireless first transceivers into free space, and onto a mesh of a multiplicity of free-space wireless communication transceivers;

further first wirelessly-telecommunicating the information upon successive links in free space upon the mesh, and through successive selected ones of the multiplicity of wireless first transceivers as are each located at a geographically separated mesh node, the successive selections of which ones of the wireless first transceivers are invoked for telecommunication upon the mesh, and the direction of the

telecommunication of the information upon the mesh, all being in accordance with the information, until a mesh telecommunications linkage is ultimately made with a wireless first transceiver at a particular selected, base station, mesh node;

5 base-station-wire/cable-switching, in a switch at the selected base station mesh node that wire/cable connected to the wireless first transceiver at this selected base station mesh node, the information between the wireless first transceiver at this selected base-station node and a wireless second transceiver
10 that is co-located at this selected base-station node along with the first transceiver; and

 second wirelessly-telecommunicating the information with and through the second transceiver to a telecommunicating device in the local geographical region of the selected base-station
15 node;

 wherein communications and telecommunications have transpired by, inter alia, wire/cable-communicating at the end-office, first wirelessly-telecommunicating over free-space mesh network links between the end-office and the selected base
20 station node, and second wirelessly-telecommunicating at the selected base station node to the telecommunicating device.

20. A hybrid telecommunications system where both

 (i) omnidirectional telecommunications, and

 (ii) directional telecommunications,

25 transpire upon at least some of a multiplicity of communications paths between a corresponding multiplicity of end-users and a cable-based communications backbone, the system CHARACTERIZED IN THAT

 each of the multiplicity of end-users telecommunicates,
30 via an omnidirectional telecommunications signal, with the system at a one of a plurality of system cells that are upon each of a plurality of hierarchical system cell levels, an end-user that proves unable to telecommunicate with the system through a system cell located at a lowest system cell hierarchical level
35 attempting to communicate with a system cell at a next higher system cell hierarchical level and so on until telecommunications

- 59 -

access to the system is finally obtained;

where IF omnidirectional telecommunications access to the system is successfully achieved at a system cell that is upon the lowest system cell hierarchical level THEN, starting from this particular lowest-hierarchical-level system cell where the telecommunications access has been so achieved, telecommunication then transpires by directional telecommunications signals directionally across directional telecommunications links organized as a mesh until a particular, end-office, system cell is reached which end-office cell is, nonetheless to being upon the lowest system cell hierarchical level, communicatively connected to a cable-based communications backbone, whereupon telecommunications with the end user that has been in part (i) omnidirectional, and in part (ii) directional, is summarily, at this end-office system cell, communicatively joined to the cable-based communications backbone; and

ELSE IF, upon such times as omnidirectional telecommunications access to the system is not achieved at the lowest system cell hierarchical level but is instead achieved only a higher system cell hierarchical level, THEN, system cells upon these higher hierarchical system cell levels being directly communicatively connected to the cable-based communications backbone, the telecommunications with the end user that has been omnidirectional, is summarily, and at this higher-hierarchical-level system cell, communicatively joined to the cable-based communications backbone;

wherein upon telecommunications upon at least some of the multiplicity of communications paths between the corresponding multiplicity of end-users and the cable-based communications backbone are (i) in part omnidirectional and (ii) in part directional.

21. The hybrid radio and optical telecommunication system according to claim 20 FURTHER CHARACTERIZED IN THAT

omnidirectional telecommunications are by radio, with an omnidirectional radio telecommunications signal.

- 60 -

22. The hybrid radio and optical telecommunication system according to claim 20 FURTHER CHARACTERIZED IN THAT directional telecommunications are optical, over directional free-space optical links.

5 23. The hybrid radio and optical telecommunication system according to claim 20 FURTHER CHARACTERIZED IN THAT directional telecommunications are by millimeter wavelength radio, over directional millimeter wavelength radio links.

10 24. A hybrid telecommunications system where both
(i) radio telecommunications, and
(ii) free-space optical telecommunications,
transpire upon at least some of a multiplicity of communications
paths between a corresponding multiplicity of end-users and a
15 cable-based communications backbone, the system CHARACTERIZED IN
THAT

each of the multiplicity of end-users telecommunicates,
via a radio telecommunications signal, with the system at a one
of a plurality of system cells that is upon each of a plurality
20 of hierarchical system cell levels, an end-user that proves
unable to telecommunicate with the system through a system cell
at a lowest system cell hierarchical level attempting to
communicate with a system cell at a next higher system cell
hierarchical level and so on until radio telecommunications
25 access to the system is finally obtained;

where, upon such times as radio telecommunications access
to the system is successfully achieved at the lowest system cell
hierarchical level, then, starting from a particular lowest-
hierarchical-level system cell where this telecommunications
30 access is so achieved, telecommunication then transpires across
free-space optical links organized as a mesh until a particular,
end-office, system cell is reached which end-office cell is,
nonetheless to being upon the lowest hierarchical system cell
level, communicatively connected to a cable-based communications
35 backbone, whereupon the telecommunications with the end user that

- 61 -

have been (i) in part by radio, and (ii) in part by free-space optical, are summarily, and at this end-office system cell, communicatively joined to the cable-based communications backbone; and

5 where, upon such times as radio telecommunications access to the system is not achieved at the lowest system cell hierarchical level but is instead achieved only a higher system cell hierarchical level, then, system cells upon these higher hierarchical system cell levels being directly communicatively
10 connected to the cable-based communications backbone, the telecommunications with the end user that has transpired by radio, is summarily, and at this higher-hierarchical-level system cell, communicatively joined to the cable-based communications backbone;

15 wherein upon at least some of the multiplicity of communications paths between the corresponding multiplicity of end-users and the cable-based communications backbone telecommunications are (i) in part by radio and (ii) in part by free-space optical links.

20 25. A broadband free-space network access system for providing broadband telecommunications services to stationary and mobile user devices comprising:

 multiple sets of plural geographically-localized uniquely-identified first-tier telecommunication stations called
25 base stations,

 each base station bi-directionally wirelessly telecommunicating by a broadband free-space first signal with a plurality of user devices within a small-size area geographically local to the base station,

30 each set of plural base stations providing in combination broadband free-space wireless telecommunications to most, but not necessarily all, of the user devices that are within a medium-size geographical area that includes the small-size geographical areas local to each base station of the set;

35 a free-space broadband communications network for communicatively interconnecting, by free-space second signals

that are of different frequency than are the first signals, the multiple sets of plural geographically-localized uniquely-identified first-tier telecommunication base stations to a communications backbone; and

5 a multiplicity of second-tier stations each within a medium-size geographical area, each second-tier station

bi-directionally wirelessly telecommunicating again by the broadband free-space first signal with any user devices within the medium-size geographical area which user devices are
10 not otherwise telecommunicating with first-tier telecommunication base stations, and

communicatively interconnecting these user devices to the communications backbone;

wherein any individual user device can, and most commonly
15 does, wirelessly telecommunicate through a first-tier telecommunications base station within a small geographical area local to the device in order to, after communicating further across the free-space broadband communications network, communicatively interconnect with the communications backbone;
20 but

wherein any individual user device can alternatively wirelessly telecommunicate within the medium-size geographical area through a second-tier telecommunications station in order to communicatively interconnect with the same communications
25 backbone.

26. The broadband radio network access system according to claim 25

wherein the collective base stations of each of the multiple sets of plural geographically-localized first-tier
30 telecommunications base stations collectively provide radio telecommunications to the majority of the user devices that are within a medium-size geographical area including the small-size geographical areas that are local to each base stations of the set;

35 wherein most of the radio telecommunications in each medium-sized geographical area is through the first tier base

stations, rather than through the second-tier station.

27. A communications system comprising:

a mesh network telecommunicatively interconnecting a multiplicity of communication switches by and upon free-space telecommunications links; and

means for establishing virtual communication paths upon the mesh network between ones of the multiplicity of communication switches.

28. The communications system according to claim 27

wherein the mesh network is telecommunicatively interconnecting the multiplicity of communication switches by and upon free-space optical telecommunications links.

29. The communications system according to claim 27

wherein the mesh network is telecommunicatively interconnecting the multiplicity of communication switches by and upon free-space millimeter wavelength radio telecommunications links.

30. The communications system according to claim 27

wherein the means for establishing virtual communication paths upon the mesh network between ones of the multiplicity of communication switches is so establishing the virtual communications links in form of a tree, the virtual communication paths from the multiplicity of communication switches focusing to a root node communication switch called an end office.

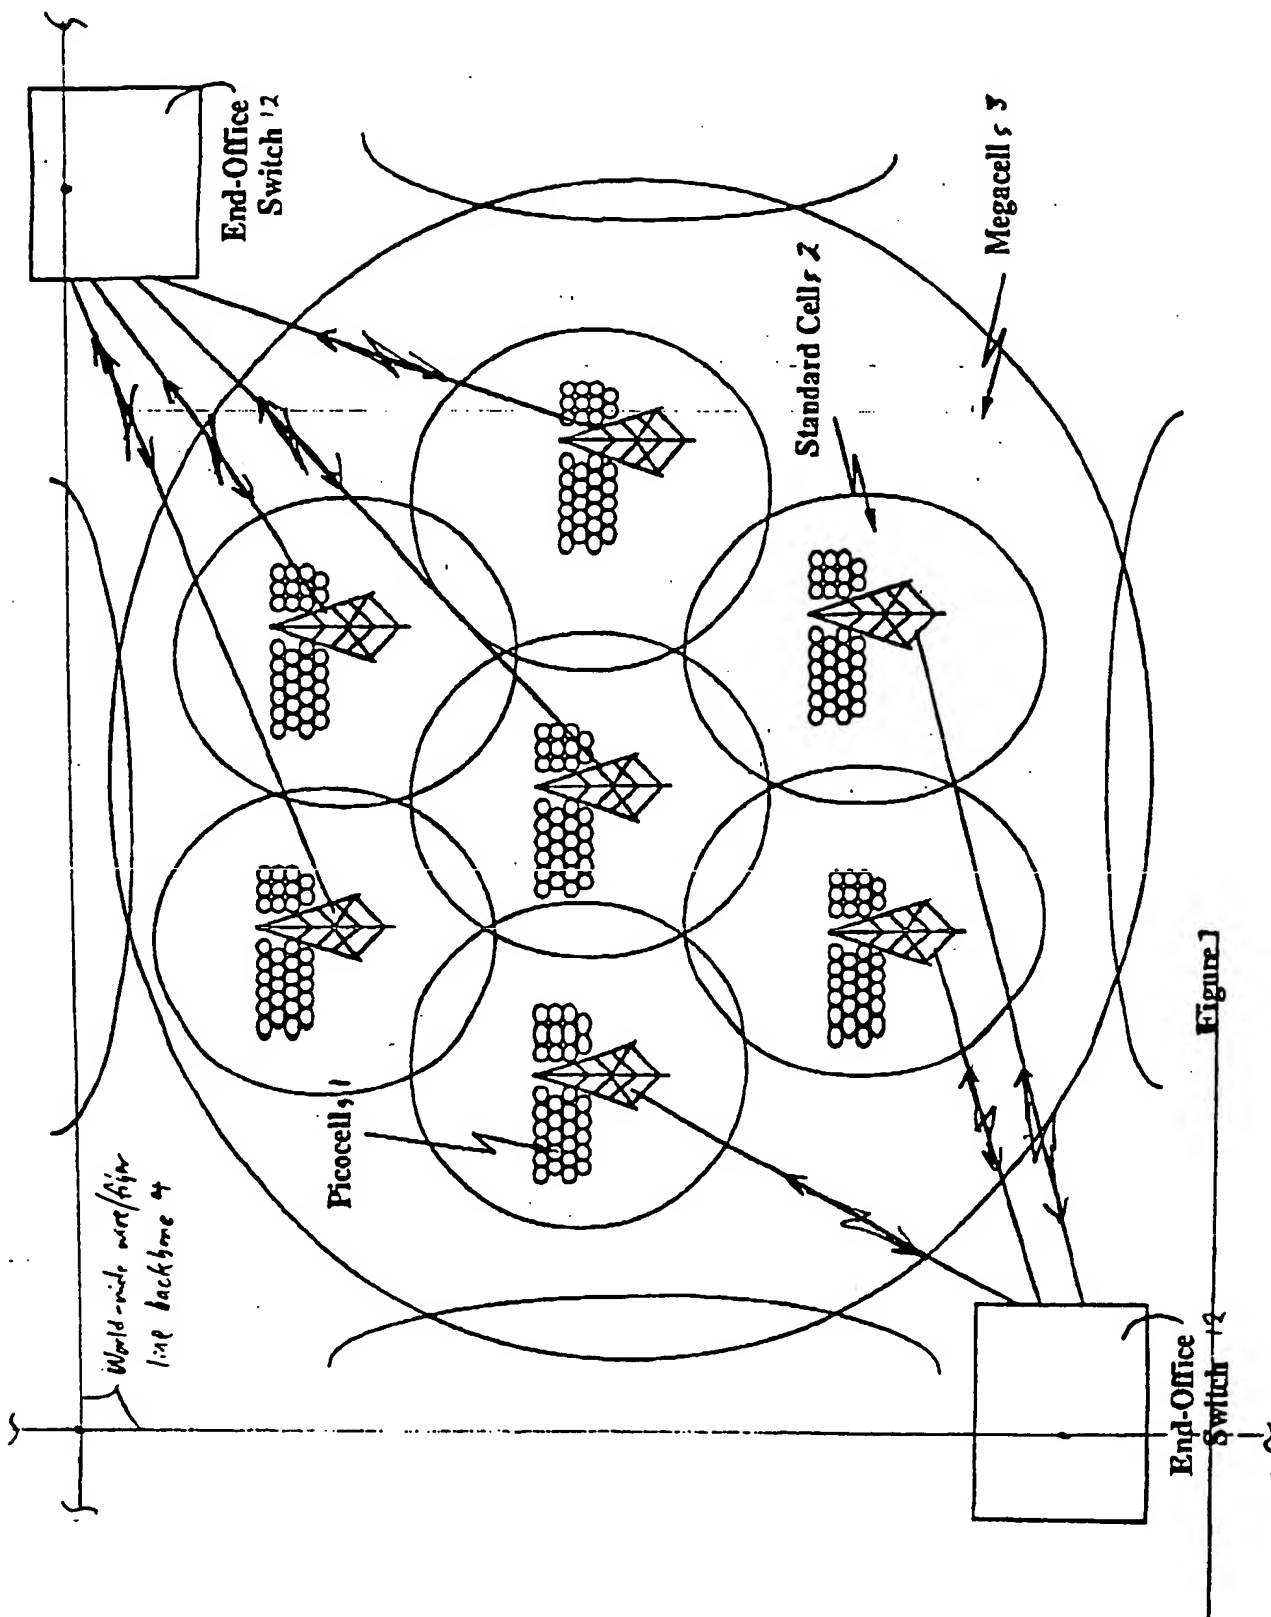


Figure 1

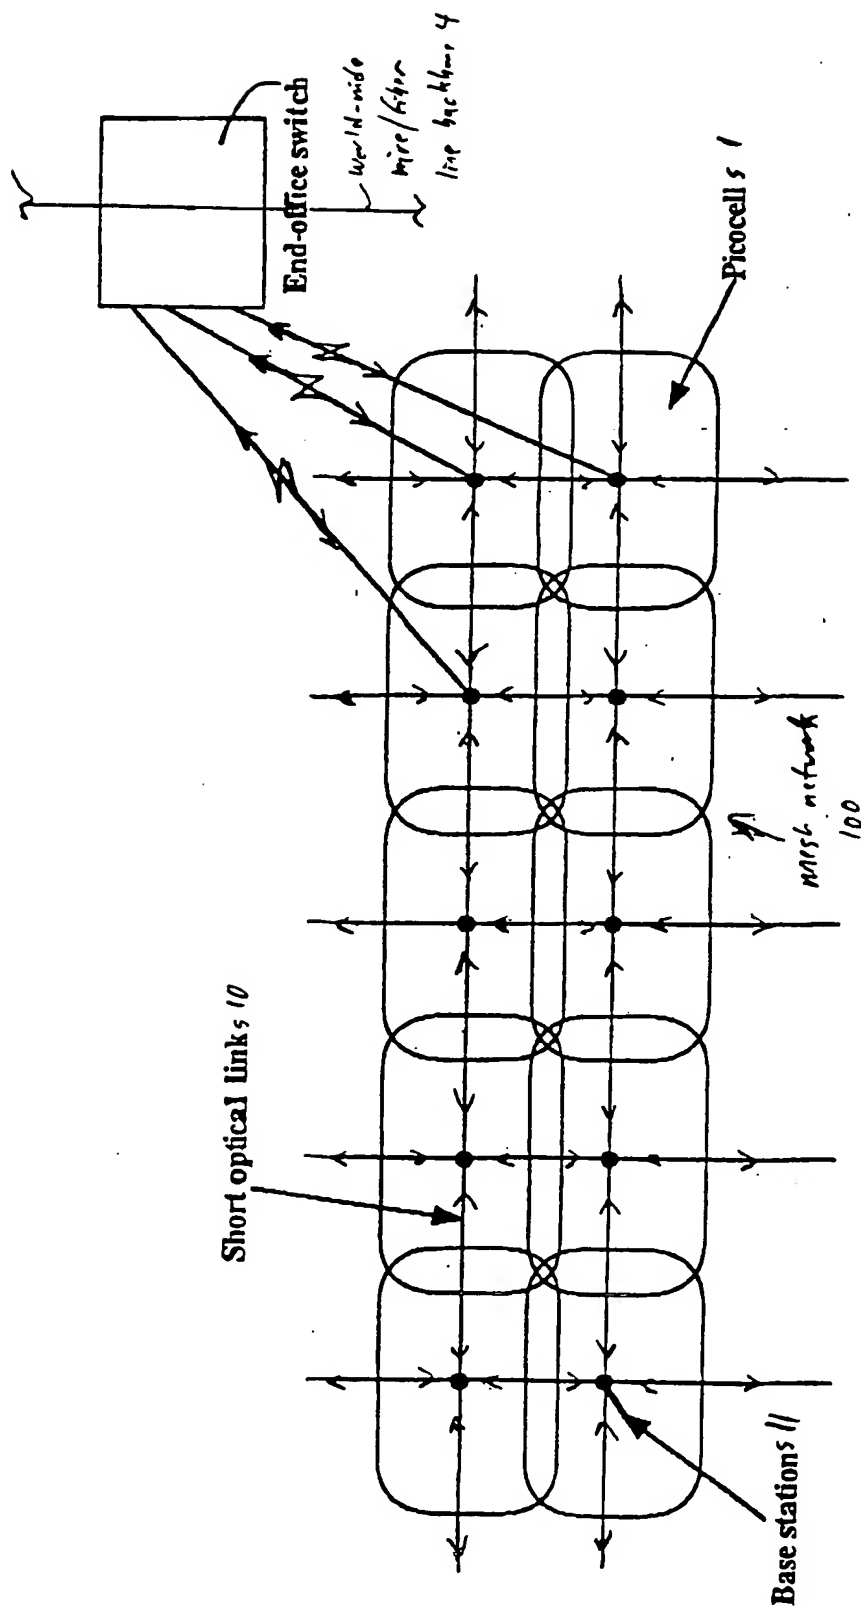


Figure 2

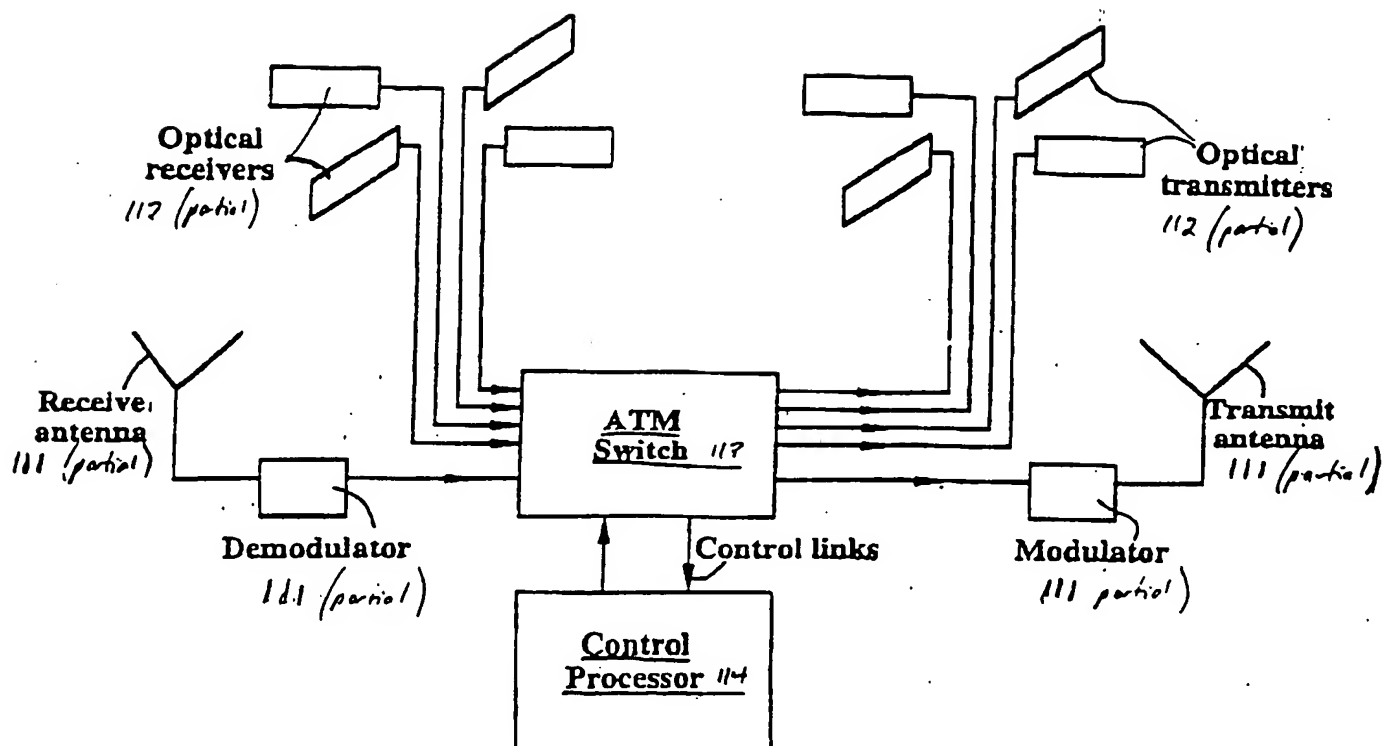


Figure 3a

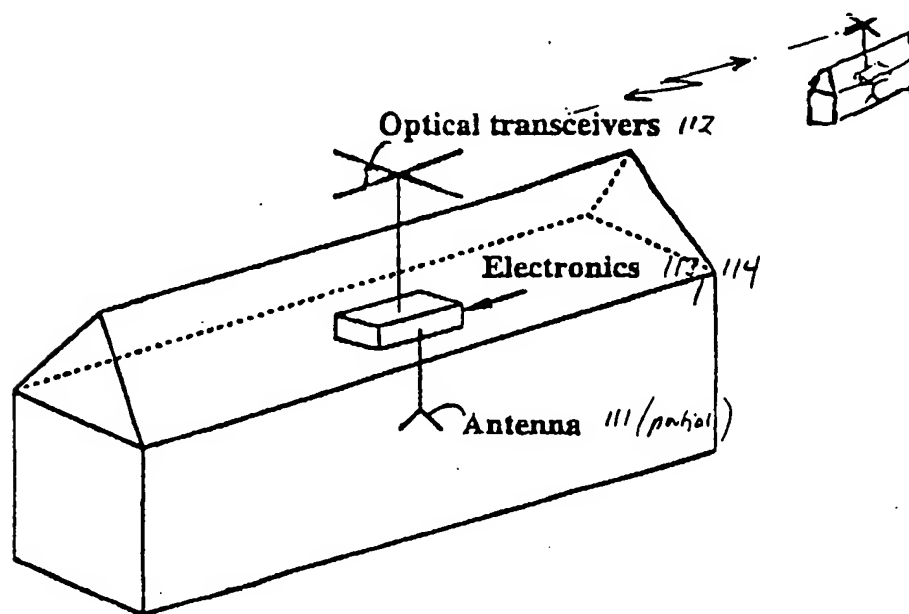


Figure 3b

4/19

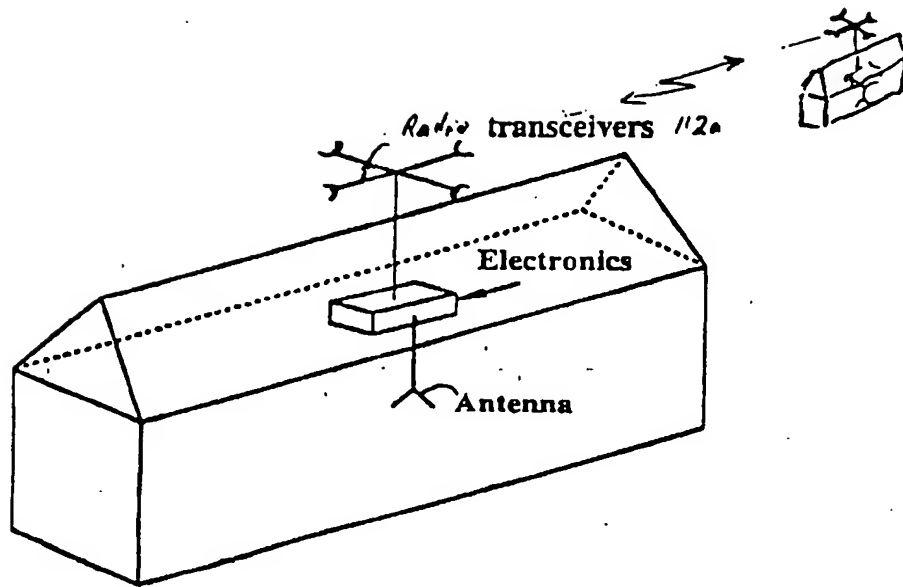


Figure 3c

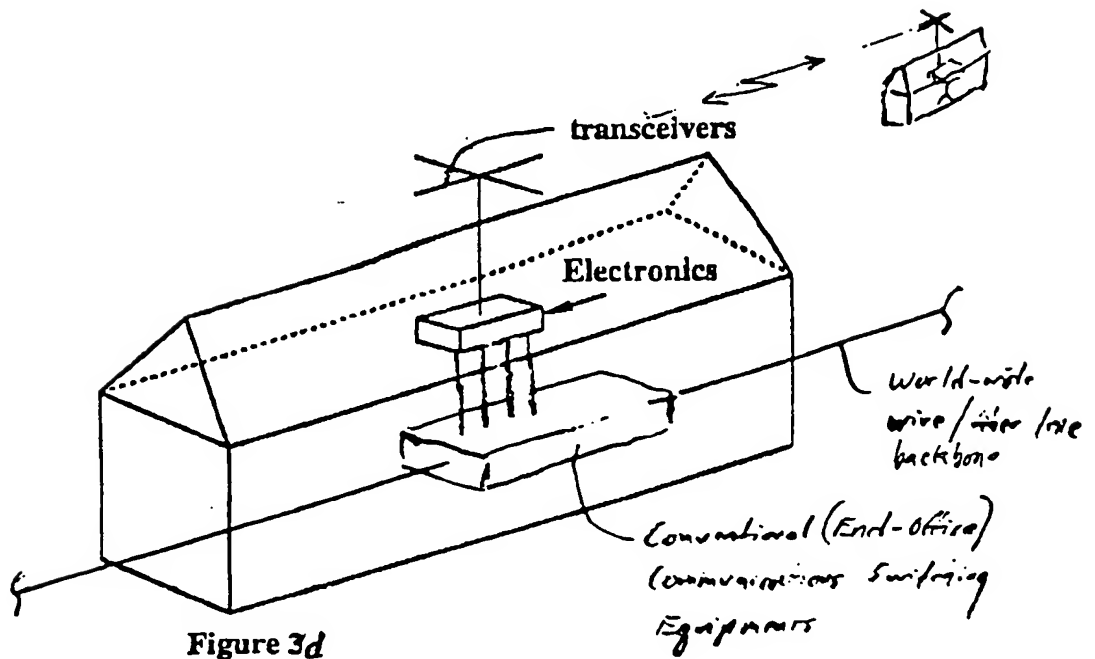


Figure 3d

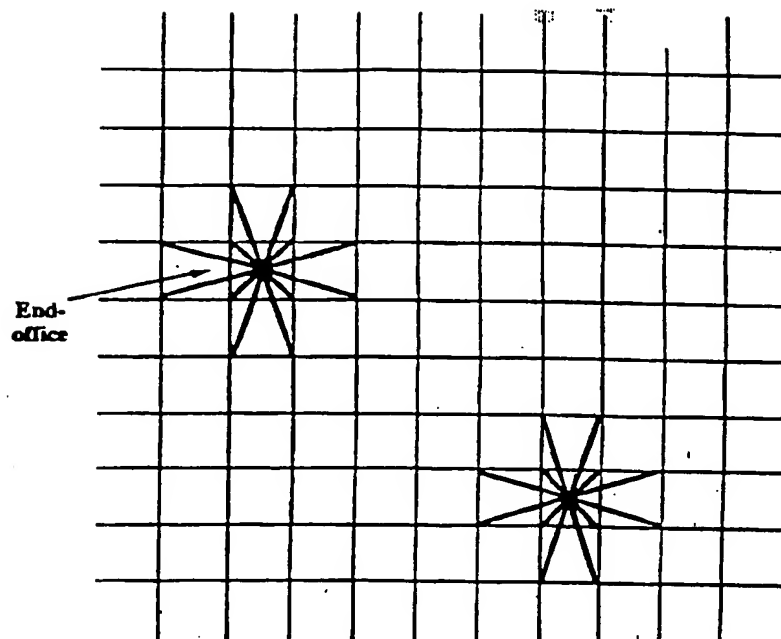


Figure 4

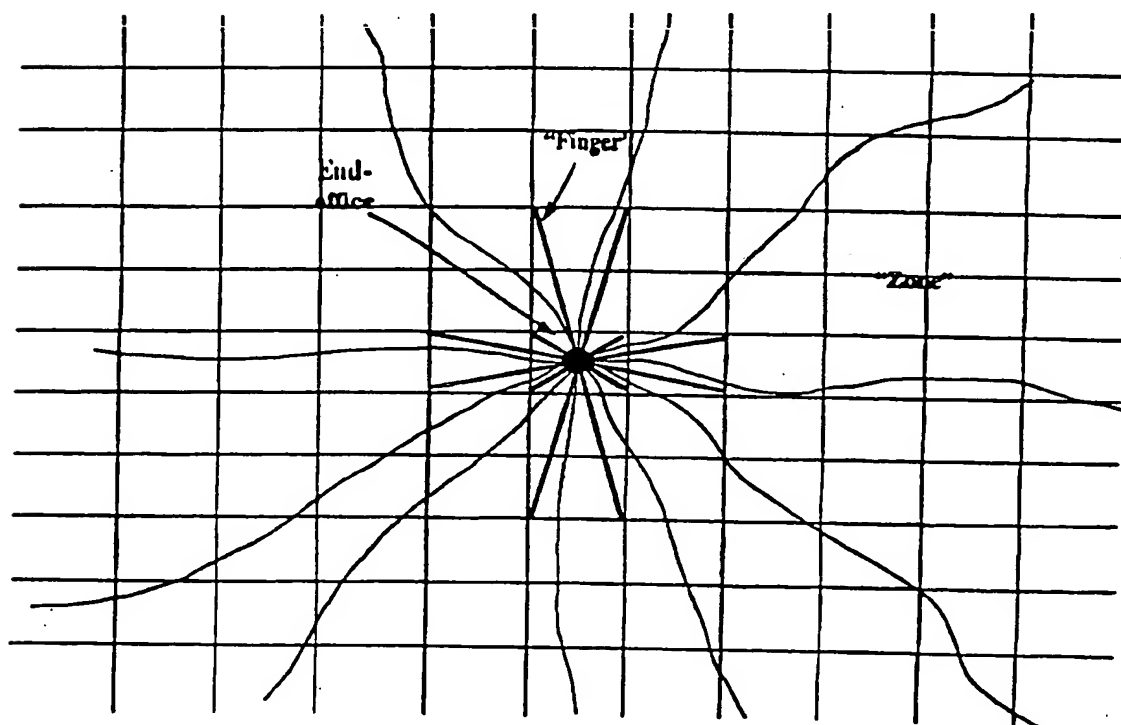


Figure 5

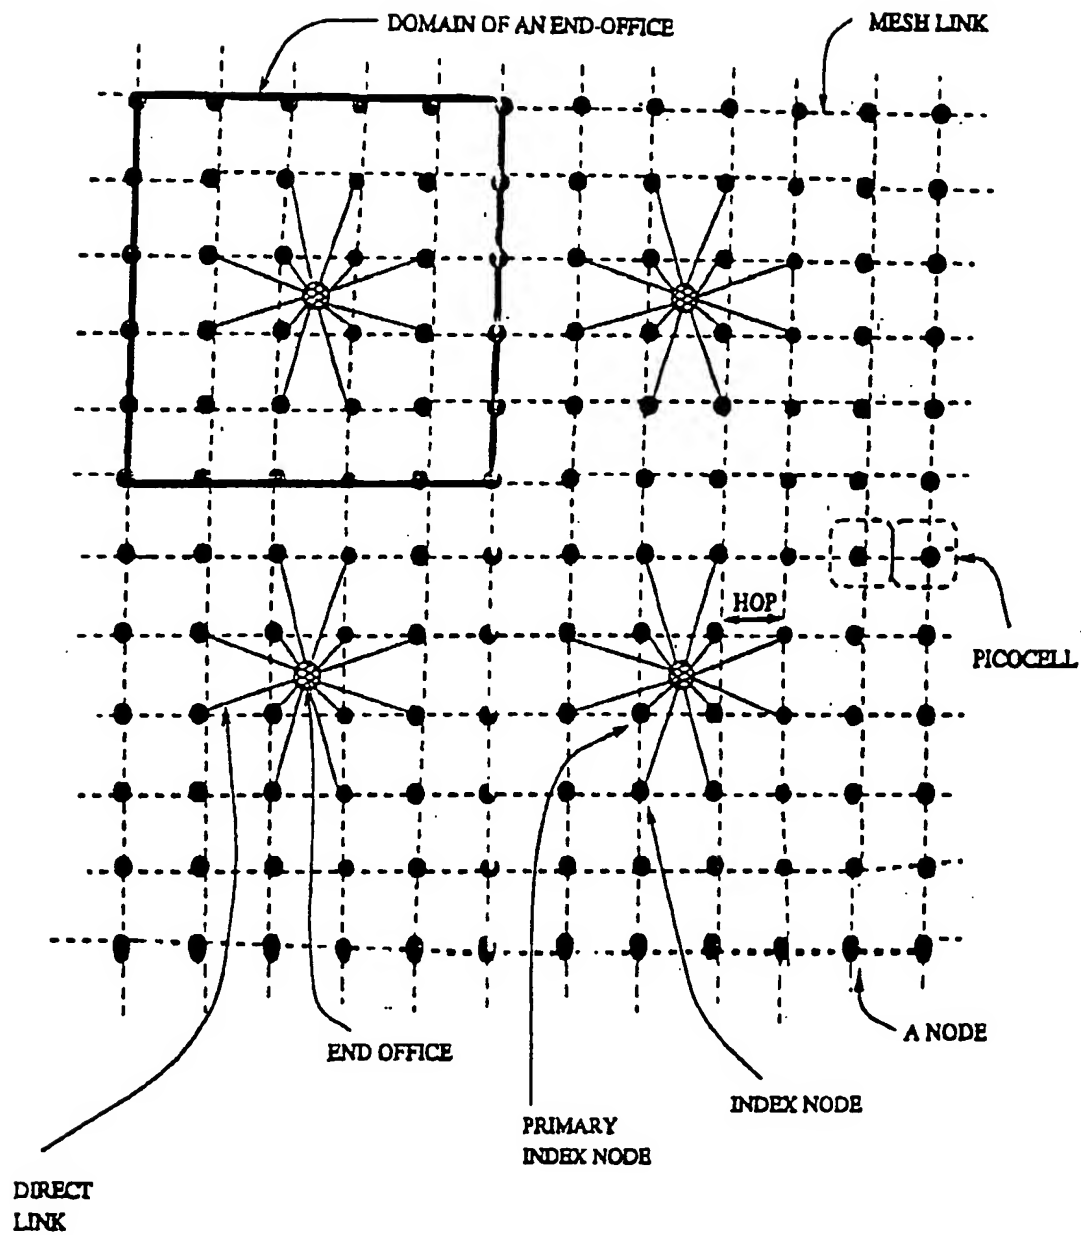


Figure 6

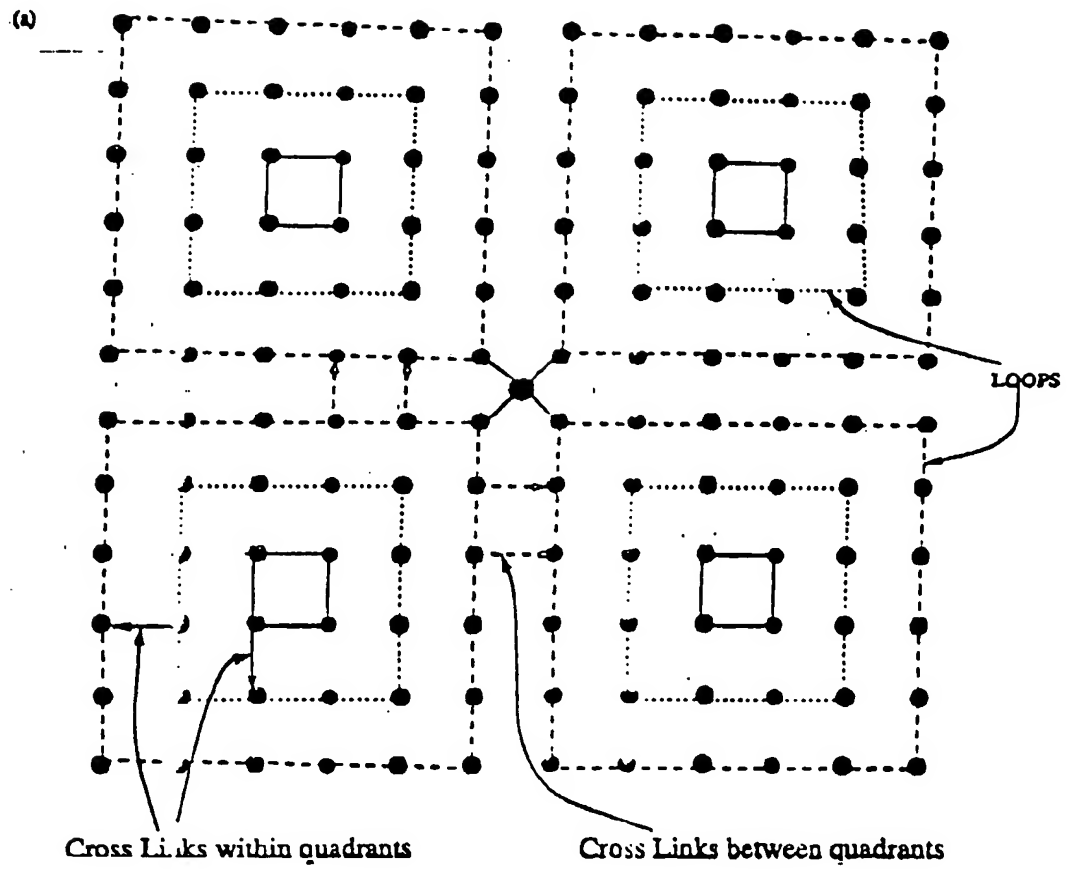


Figure 7a

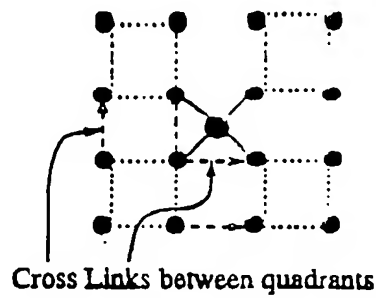


Figure 7b

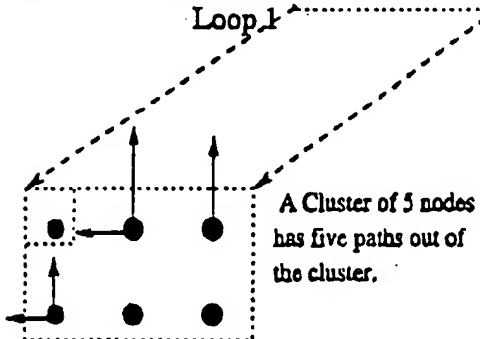
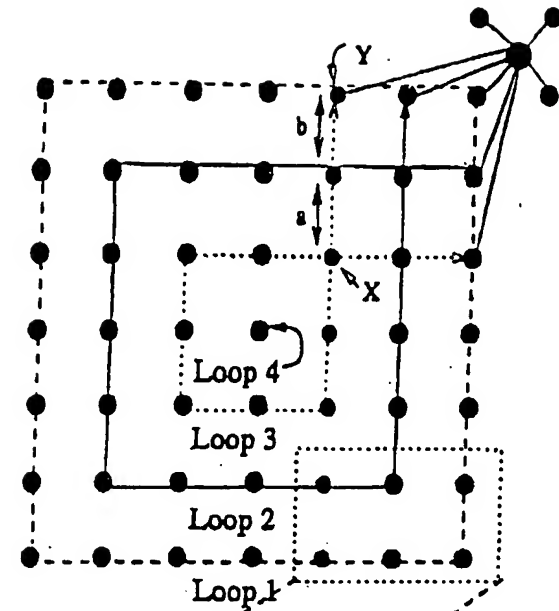


Figure 8a




Figure 8c

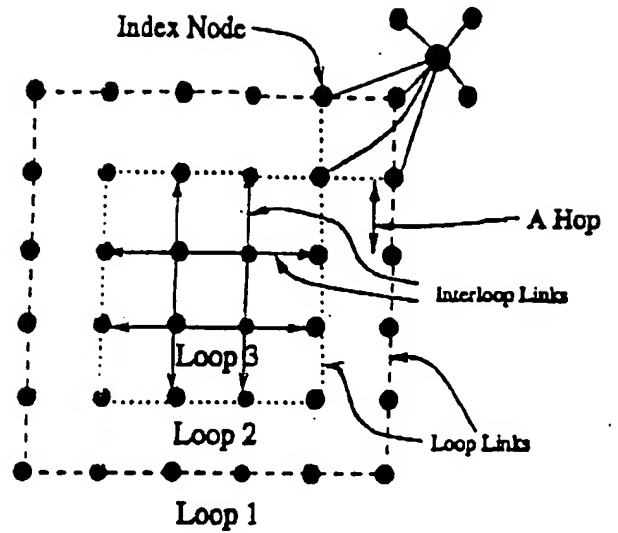


Figure 8d

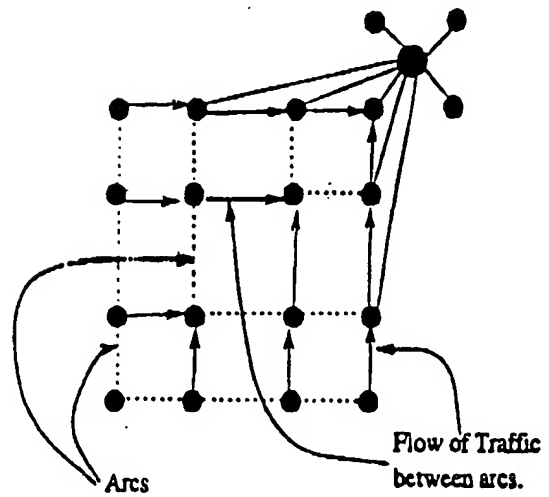


Figure 8e

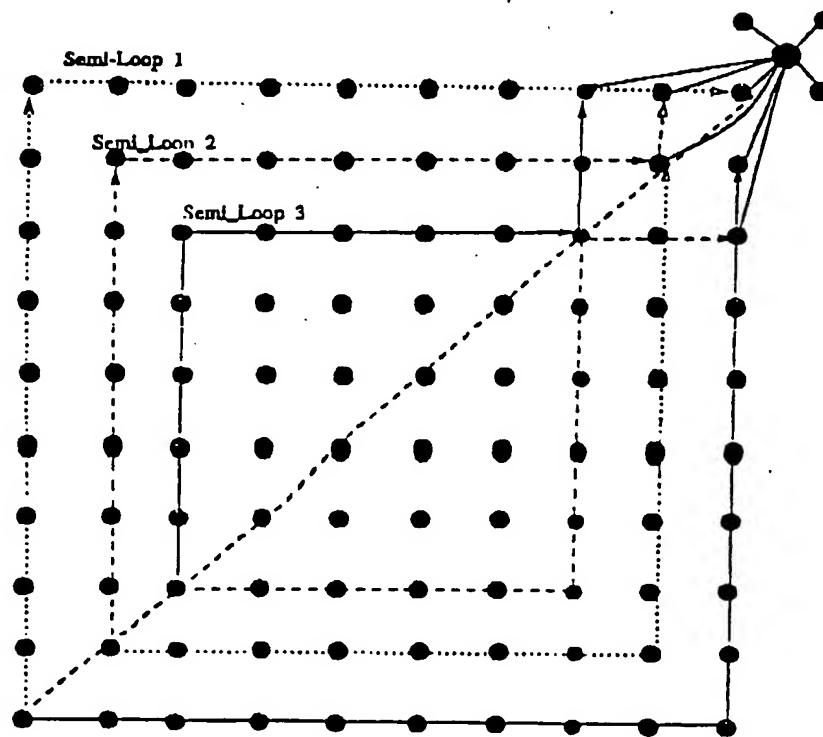
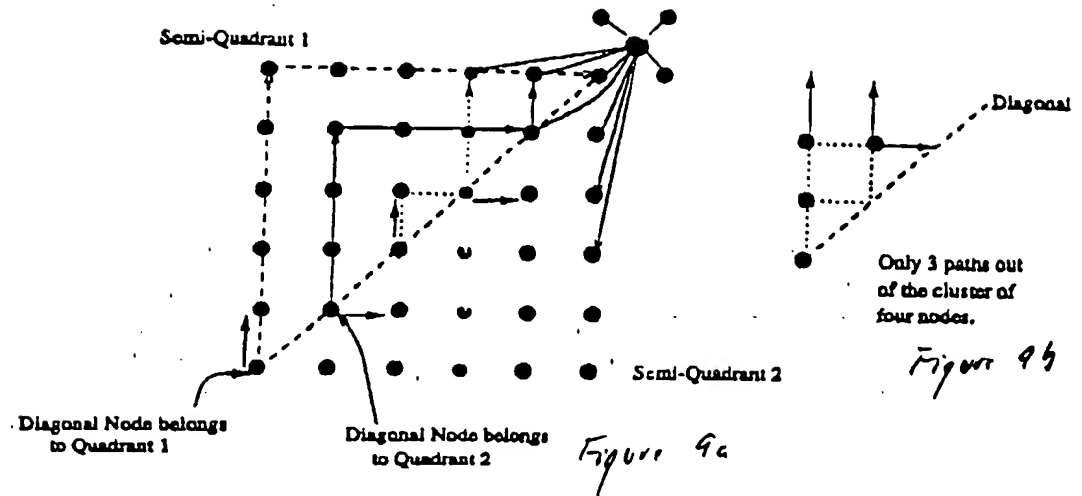


Figure 9c

10/19

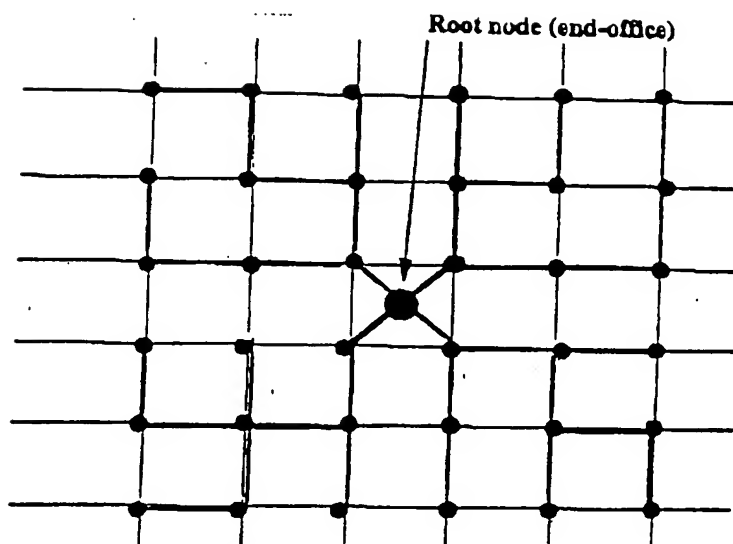


Figure 10a.

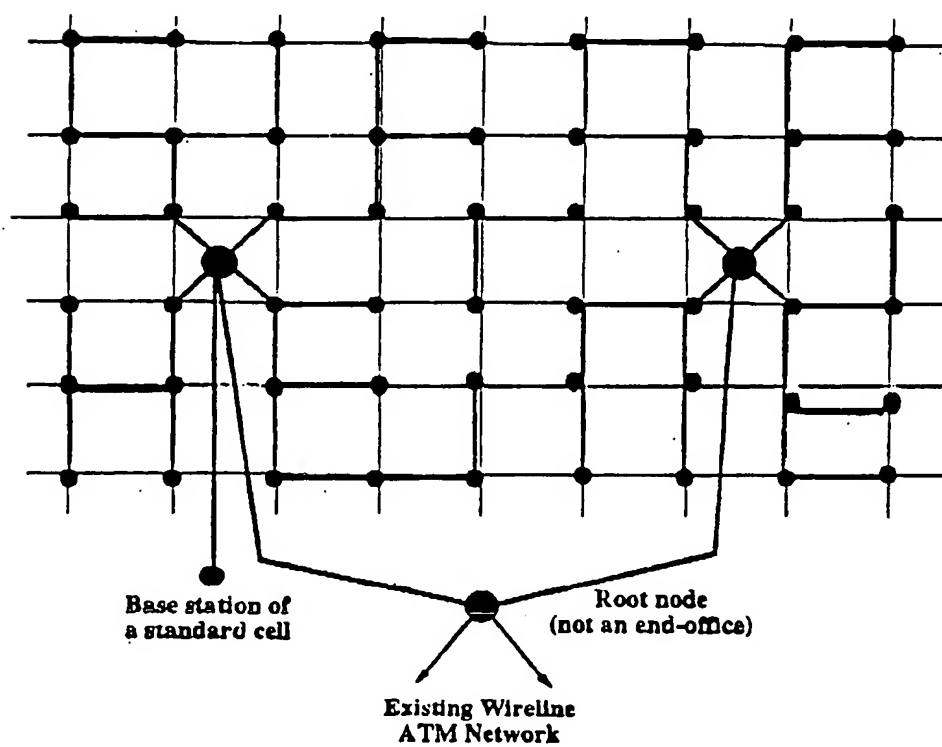


Figure 10b

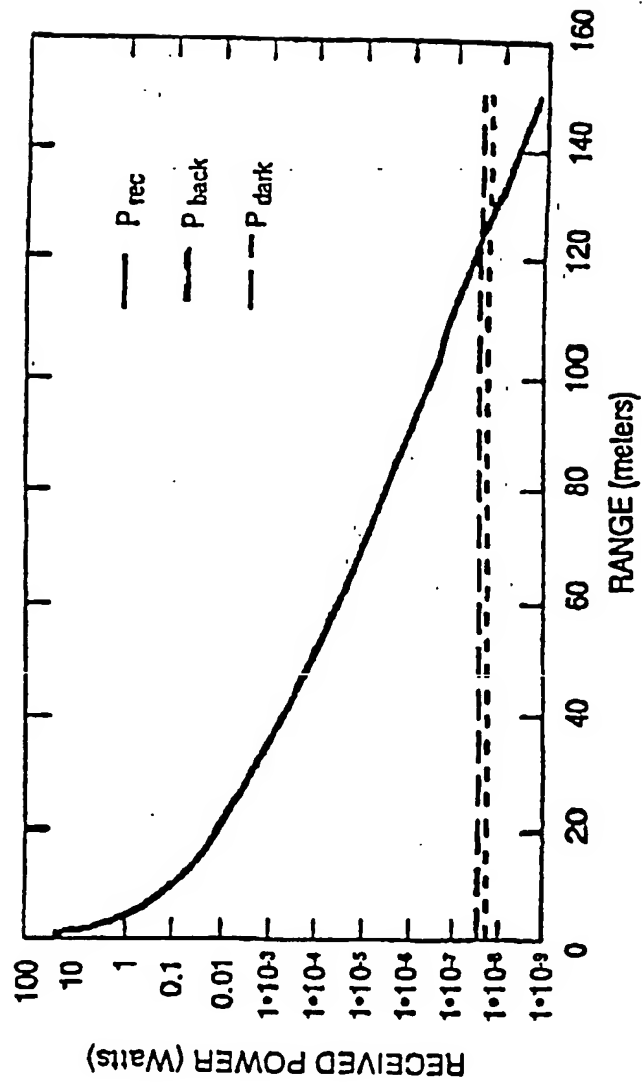


Figure 11

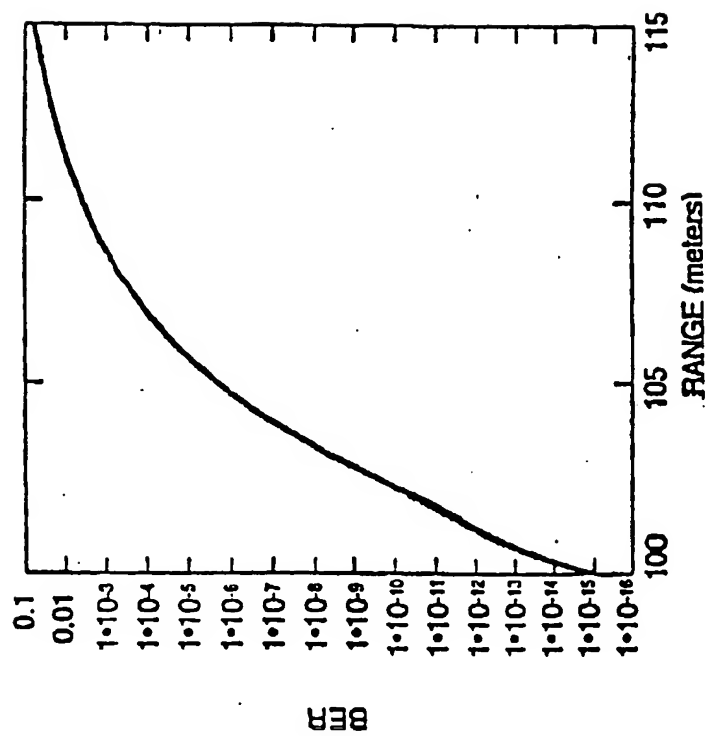


Figure 12

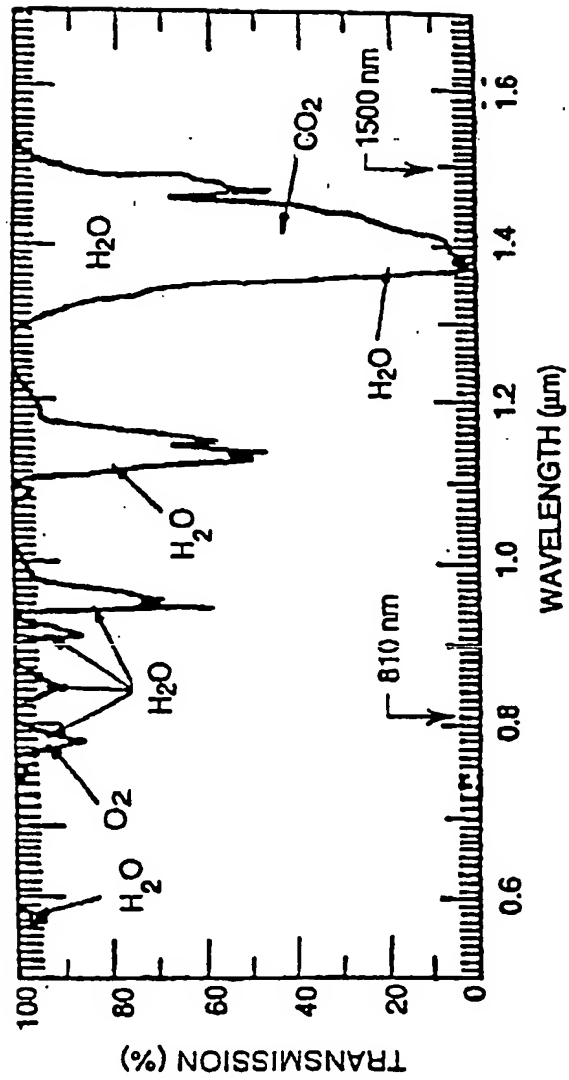


Figure 13

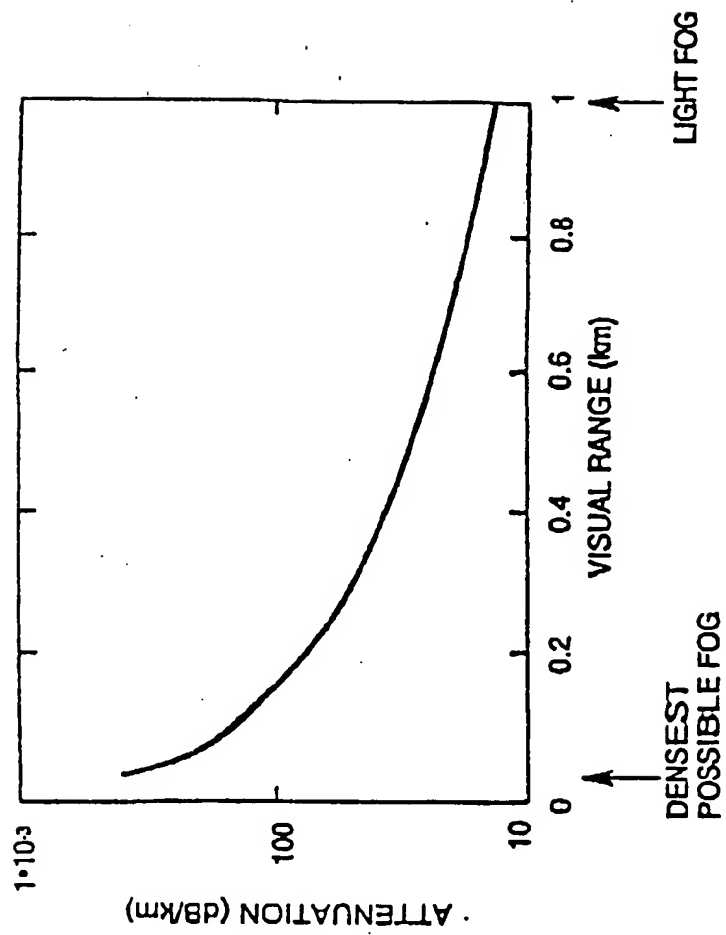


Figure 14

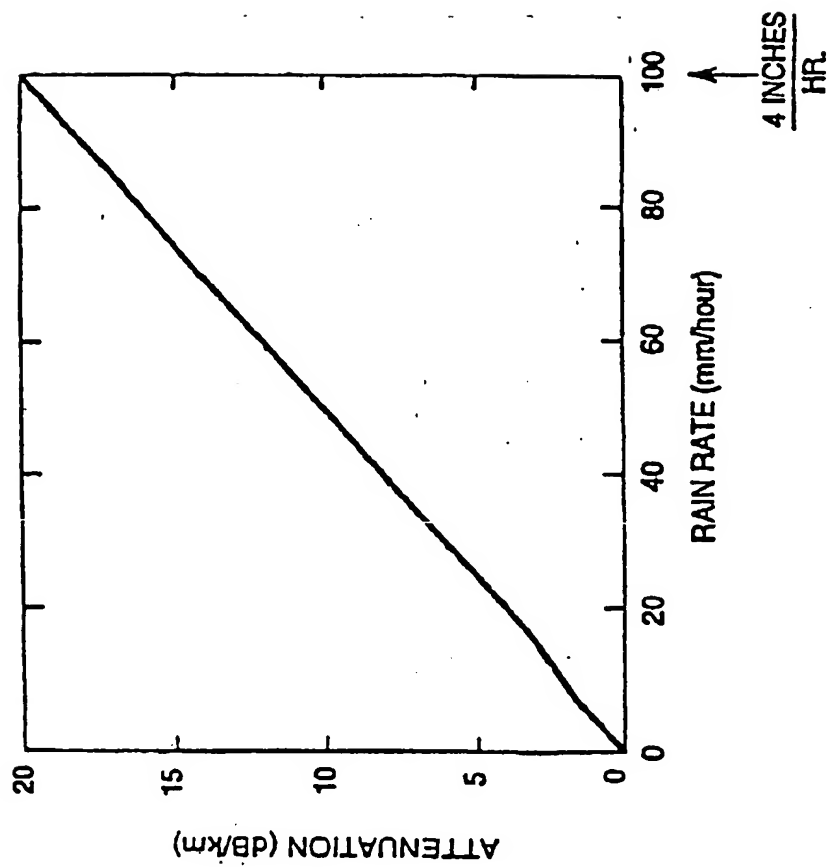


Figure 15

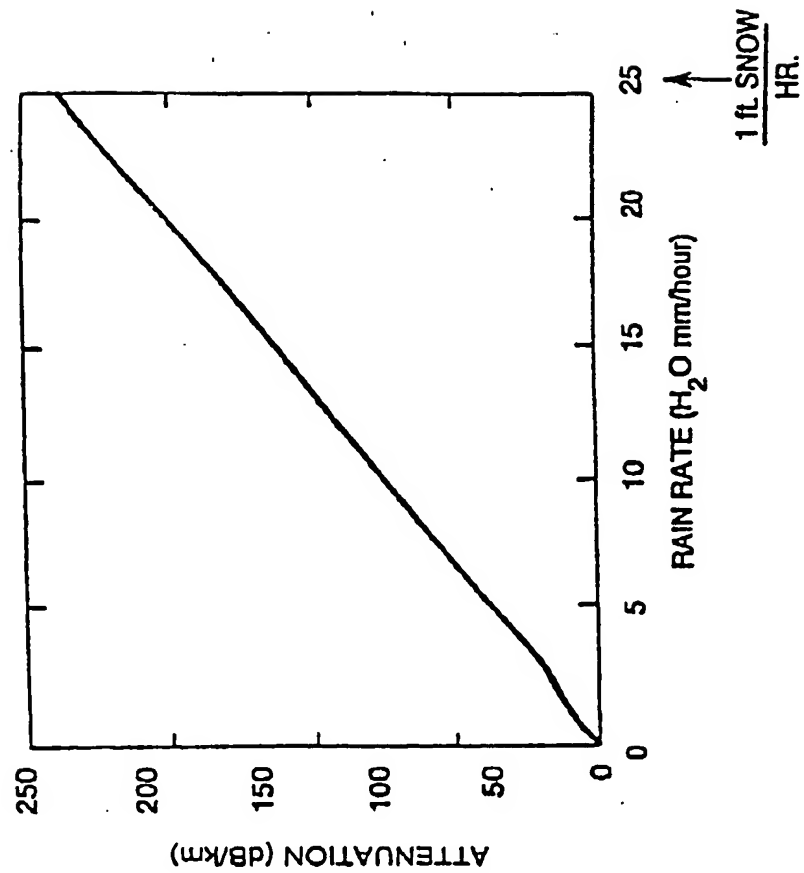


Figure 16

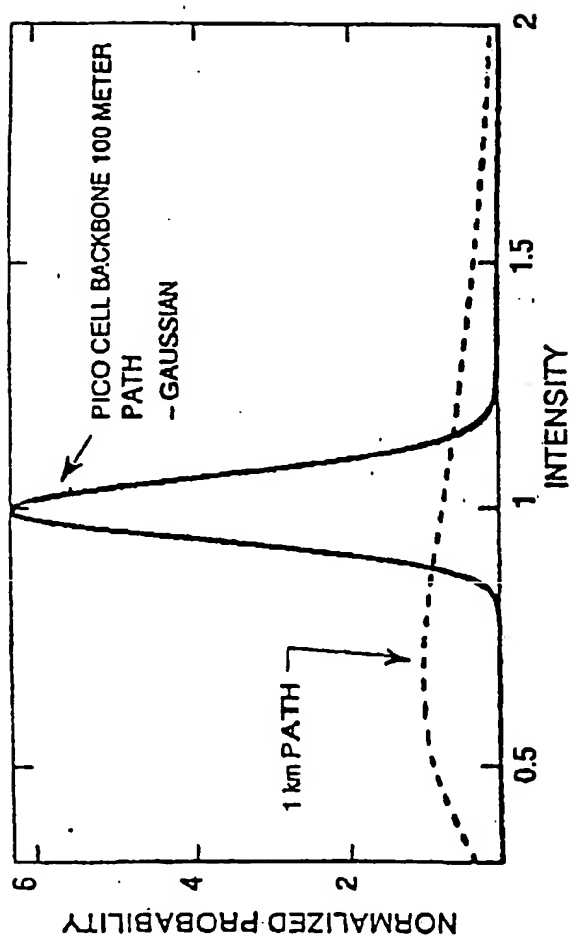


Figure 17:


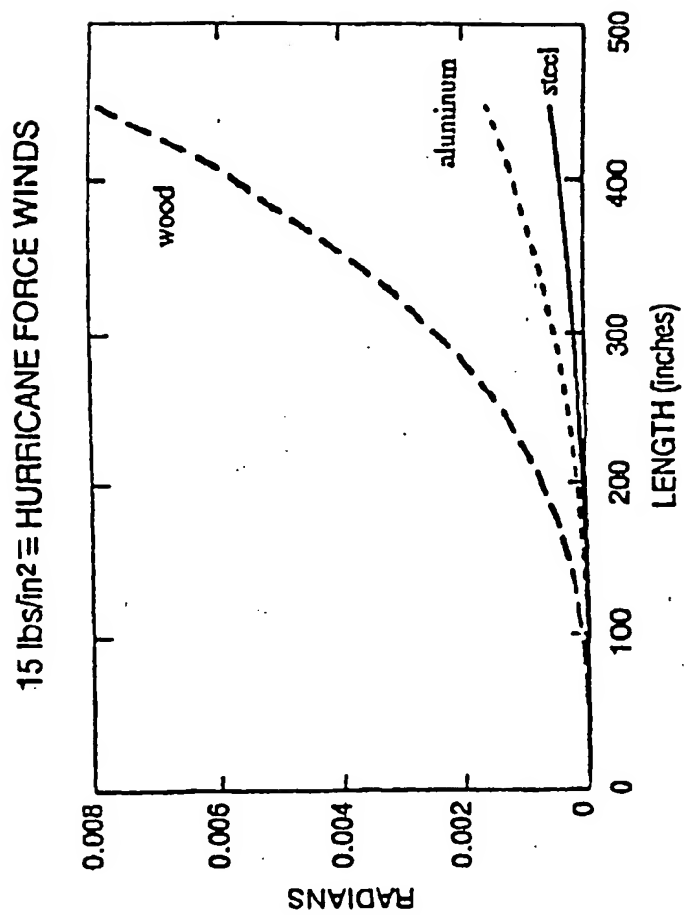


Figure 18:

**Figure 19**

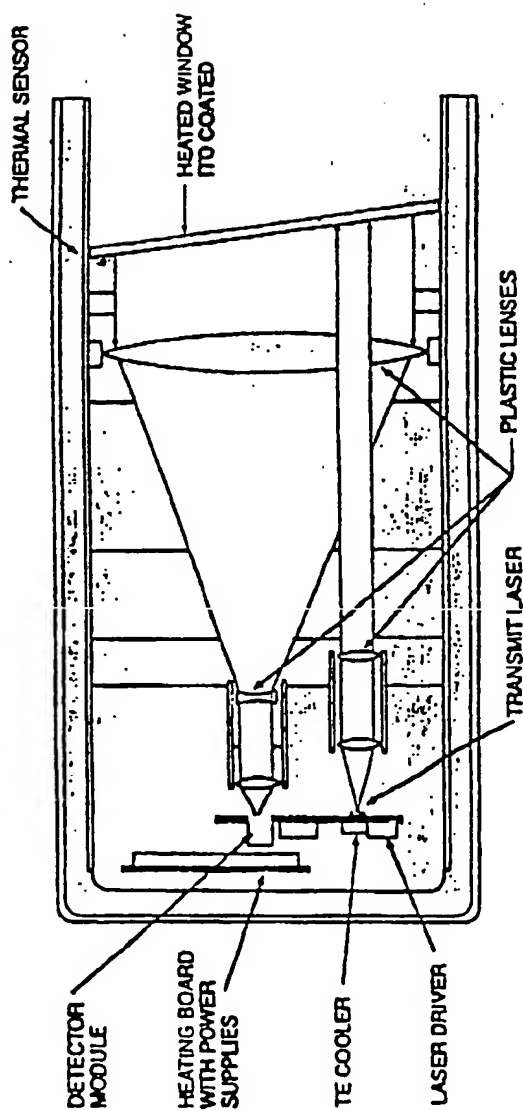

3

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04H	A2	(11) International Publication Number: WO 98/32250
		(43) International Publication Date: 23 July 1998 (23.07.98)

(21) International Application Number: PCT/US98/01250

(22) International Filing Date: 15 January 1998 (15.01.98)

(30) Priority Data:

60/035,698	17 January 1997 (17.01.97)	US
Not furnished	19 December 1997 (19.12.97)	US

(71) Applicant (for all designated States except US): THE REGENTS OF THE UNIVERSITY OF CALIFORNIA [US/US]; 22nd floor, 300 Lakeside Drive, Oakland, CA 94612-3550 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): ACAMPORA, Anthony [US/US]; 6473 Avenida Cresta, La Jolla, CA 92037 (US).


(74) Agent: FUESS, William, C.; Fuess & Davidenas, Suite II-G, 10951 Sorrento Valley Road, San Diego, CA 92121-1613 (US).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).

Published

Without international search report and to be republished upon receipt of that report.

(54) Title: HYBRID UNIVERSAL BROADBAND TELECOMMUNICATIONS USING SMALL RADIO CELLS INTERCONNECTED BY FREE-SPACE OPTICAL LINKS

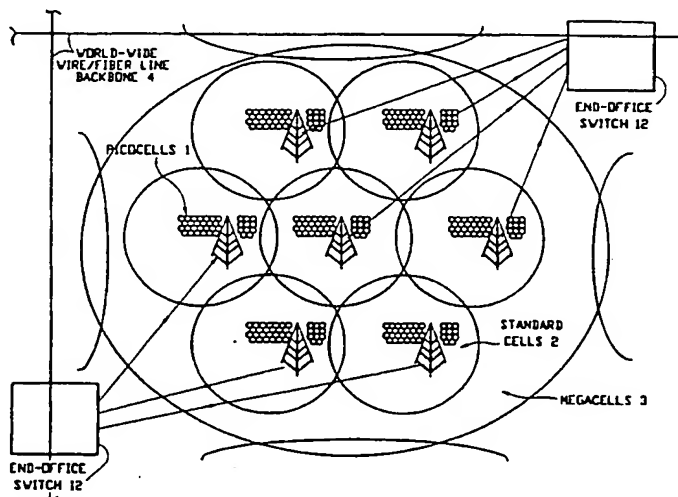

(57) Abstract

Diverse communication terminals attach via broadband radio to a communications network at any of typically three hierarchical cell sizes increasing from, typically, a single building to a city to a region. Almost all telecommunications traffic transpires, however, within lowest-level "picocells 1" to and from low cost "base stations 11" that have typically one radio transceiver (111), four optical transceivers (112), an ATM switch (113) and an ATM controller (114). Each local "base station (11)" is interconnected to a regional "end office switch (12)", where is realized connection to a worldwide wire/fiber line communications backbone (4), upon a multi-hop mesh network (100) via short highly-focused free-space broadband directional optical links (10). By this free-space wireless broadband access the need for new broadband access cabling the "last mile" to subscriber/users is totally surmounted. Subscriber service is of the order of 20 Mb/s peak rate, and 10 Mb/s average rate.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LJ	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

HYBRID UNIVERSAL BROADBAND TELECOMMUNICATIONS USING SMALL
RADIO CELLS INTERCONNECTED BY FREE-SPACE OPTICAL LINKS

REFERENCE TO RELATED PREDECESSOR NATIONAL PATENT APPLICATIONS

The present patent application is related to U.S.
5 Provisional Patent Application Serial No. 60/035,698 filed on
January 17, 1997, for a METHOD AND APPARATUS FOR HIGH CAPACITY
RADIO ACCESS SYSTEM; and also to the U.S. Utility Patent
Application Serial No. 08/AAA,AAA, filed on December 21, 1997,
of the same name as this application. Both related predecessor
10 U.S. national patent applications are to the selfsame Anthony
Acampora who is the inventor of the present application.

BACKGROUND OF THE INVENTION

1. Field of the Invention

15 The present invention generally concerns wide area
multimedia broadband telecommunications systems and services,
particularly systems and services for homes, offices, outdoor
and/or remote locations where telecommunication terminals are
attached to a wire- or fiber-based telecommunications network via
20 wireless links, thereby permitting users of the
telecommunications terminals the ability to roam freely and
obviating any requirement that a wired "telecommunications
outlet" should be available.

The present invention particularly concerns the
25 partitionment of wide area multimedia broadband
telecommunications systems and services both (i) in the media --
radio, free-space optical, or wire and fiber -- over which
communications traffic from point to point and from time to time
transpires, and also (ii) in the system hardware, and among the
30 system protocols, for handling this communications traffic (upon
the various media). All partitionment is to the end of ensuring
universal low-cost high-performance wide-area
(tele)communications availability. In particular, the present
invention will be seen to be concerned with how to connect the
35 existing world communications "backbone" which is, in America
circa 1997, based primarily on wire and optical fiber lines, to
the typical subscriber household and office -- the so-called
"last mile" problem.

2. Description of the Prior Art

2.1 General Challenges Bessetting Universal Communications Systems and Services

5 For the past several years, the telecommunications industry has witnessed an explosive growth in the demand for (1) non-voice types of services (driven by so called multimedia traffic, and suggestive of some unspecified combination of low and high speed data, voice, image, and video); and (2) service to
10 non-stationary, mobile, end terminals. See D. Wright, Broadband: Business Services, Technologies, and Strategic Impact, Artech House, Boston, 1993; A. S. Acampora, An Introduction to Broadband Networks, Plenum Press, New York, 1994; IEEE Communications Magazine, issue on Introducing the Internet Technology Series, Vol. 35, No. 1, Jan. 1997; T. S. Rappaport, Wireless Communications Principles and Practice, Prentice Hall, New
15 Jersey, 1996; and IEEE Personal Communications, issue on Wireless ATM, Vol. 3, No. 4, Aug. 1996.

20 Despite this demand, three primary technical problems remain to be solved before a communications infrastructure adequate to meet modern demand can be created.

The first of these problems involves the inadequate capacity afforded by the copper wires which typically presently, circa 1997, serve to connect homes and offices to core, or "end-office", switches within the existing U.S. national
25 telecommunications network. These wires are additionally characterized by their inflexibility to accommodate new and added communications devices at the user portal; exactly where changes are most likely to occur. In other words, even if all the copper
30 wire in the U.S. was to be instantaneously converted to high-bandwidth fiber optics, the locations, and the physical connections, of new telephones or computers or televisions or other devices to the wire and fiber communications network would remain troublesome, effectively mandating extensive and expensive
35 manual services to "wire" and "re-wire" the home or office site every time site service requirements change appreciably.

It would obviously be useful if some "magic box" existed in

the attic, or the communications closet, which permitted that any communications device brought within the home or building, whether permanently or temporarily, could be immediately wirelessly integrated into the communications network totally without the use of skilled labor. The "magic box" would preferably be universal, inexpensive, and supportive of a high communications capacity. Although this "magic box" might occasionally have to be upgraded if new and very large communications requirements were to arise at the home or office site, the requirement of expensively "custom wiring" the communications of the home or office would be obviated.

The second problem concerns the limited available bandwidth of the radio spectrum to meet the demand for non-stationary and/or flexible communications services. The "black box" of the previous section could clearly be a cellular radio transceiver serving to link diverse communications devices, whether portable or not, to a communications grid by radio. Alas, the radio spectrum that is both now (i.e., in 1997) allocated, and reasonably allocatable, for general telecommunications services is already crowded, and incapable of meeting all the demands for real-time multimedia communication arising over any extended populated geographical area.

The third problem concerns the desire, if not the political necessity, of guaranteeing universally (i) available and (ii) affordable communications services. It is clearly possible to auction the radio spectrum, and to let those who can afford more use more. It is clearly possible to cost-effectively service certain metropolitan areas while leaving communication "backwaters" that are not fully enfranchised with evolving equipments and services. However, in a democracy there are limits in allocating the God-given public resource of the radio spectrum purely on financial grounds.

At the same time the existing U.S. national communications infrastructure presents challenges to future upgrading, it also presents opportunity. As reported by author and futurist George Gilder in his book "Into the Fibersphere", and in his columns of the "Telecosm Series" appearing in Forbes Magazine, "the ultimate

source of bandwidth expansion is the immense capacity of optical fiber. Now comprising a global installed base of 40 million miles (25 million miles in North America), each optical fiber, as Paul Green of IBM estimated to Forbes ASAP four years ago [i.e., in 1992] commands and intrinsic available bandwidth of 25,000 gigahertz." How much bandwidth is this? It is more than all the radio telecommunications -- from ultra low frequency communication with submarines to K band satellite links -- that are at any one time transpiring on the entire planet. Yes, each single strand of 40 million miles of optic fiber already existing can potentially handle all the radio traffic in the entire world.

Where then exactly is located this wonderful pipeline to all the world's information? In America it is close by, but has not yet reached the average American doorstep. Five years ago each American household was an average of 1,000 households away from a fiber node, now it is but 100. At the beginning of 1996 15% of U.S cable TV subscribers directly connected to fiber optics; at the end of 1996, 30%. Being that not all American households presently have, or even can have, cable television, the average separation in feet of a U.S. household or business from an optic fiber is still several hundred feet. And, due to the first problem discussed above, many Americans in metropolitan areas literally have optic fiber "at their feet" but are unable to effectively connect to it. It will be seen to be the objective of the present invention to solve all three problems, and to cost-effectively and equitably avail all the world's peoples of the opportunity to communicate into the growing fiber optic communications "backbone" of the United States and of the world.

The capacity and flexibility problem at the user interface will be, by and large, solved by the present invention. The user will be able to add new telecommunications devices at will within broad limits. Although these devices will often be bi-directionally communicating, and are in general used for purposes such as Internet access, pay-per-view, programming on demand, and multimedia communication that are quite different from traditional broadcast radio and television, they will require no

- 5 -

more "installation" than, for example, does a store-purchased radio or television receiving broadcast signals.

The limited available bandwidth of the radio spectrum will likewise seen to be solved -- without repealing physical laws -- by the expedient of reusing most portions of the radio spectrum.

Finally, the (i) availability and (ii) affordability of universal communications services will also be seen to be dealt with effectively in the present invention, where any system user is but little burdened with the cost of the communications network if he or she is but a light user of its services. The un-subsidized cost of, for example, "life line" telecommunications services, even in remote areas, should be commensurate with what it is now. This is true even though an immediate "next" user who is adjacently located both geographically and logically in the communications network may volitionally use awesomely large telecommunications services, incurring the costs therefore.

SUMMARY OF THE INVENTION

The present invention contemplates a new type of broadband access system for providing high quality, bandwidth-upon-demand, communication services to homes and offices. The invention is a candidate architecture for immediate implementation as a significant portion of the United States national communications infrastructure in the twenty-first century, and is suitable for world-wide use. This portion is particularly between (i) diverse (tele)communicating equipments that are located in American homes and offices and (ii) the U.S. national and world communications "backbone" which is, by and large, presently based on copper wire and on fiber optics. This portion of the U.S. national communications infrastructure -- which is the portion primarily dealt with by the present invention -- is commonly called the "last mile".

1. System General Description

In the communications system of the present invention, diverse communication terminals attach to a communications network via short radio links. Terminal users can roam freely within a house or building unencumbered by availability of wired communications outlets. Basic service is extended within this region by and through small, high capacity, broadband radio cells called "base stations".

Typically large grid arrays of base stations are interconnected, each base station to several of its neighbors, via short, highly focused free-space broadband optical or millimeter wave links in a multi-hop mesh network. Stepwise multi-hop communication upon the mesh ultimately leads to an "end office" where access to a wire, or fiber, communications "backbone" is made. By this totally free-space broadband access any need for new broadband access cabling over the "last mile" is totally surmounted.

A multi-tiered arrangement of radio cells further extends radio telecommunications service both to out-of-building pedestrian and to vehicular users. The projected several tiers of free-space radio cells will ultimately provide universal broadband radio telecommunications service over the entirety of the planet.

This approach of the present invention presents issues involving reliability, availability, capacity, and hand-off. These issues are identified and addressed in this specification. The obtainable service rate is of the order of 20 Mb/s peak rate, and 10 Mb/s average rate, to each and all subscribers, universally within a geographical area projected in the first instance be the continental U.S.

The systems approach of the present invention surmounts three broadband access challenges. The preferred system uses three tiers of radio cells, with some possibly large number of lower-tiered cells nested within each higher-tiered cell. To avoid extensive re-wiring, short, free-space optical or millimeter wave links interconnect the base stations of the lowest-tiered cells.

The overwhelmingly greatest fraction of access traffic is

handled by cells in the lowest tier. Here, each of a large number of geographically small, high capacity radio cells (called "picocells") is responsible for serving some small number (perhaps one) of homes and/or offices. Most service subscribers will, in most cases, attach to the network via their home or office base station and, through this base station, enjoy complete freedom to roam within the building and its immediate surroundings.

A cluster of contiguous picocells thereby serves a large population of users, each of whom is served via a home or office picocellular base station. A packet mode of wireless access, similar to if not identical with the Asynchronous Transfer Mode (ATM), supports the bandwidth-upon-demand needs of multimedia traffic. See M. de Prycker, Asynchronous Transfer Mode, Ellis Horwood Limited, West Sussex, 1992.

Imbedded virtual connection trees maintain quality-of-service guarantees while permitting rapid, decentralized hand-off of live connections among adjacent picocells. See A. S. Acampora and M. Naghshineh, An Architecture and Methodology for Mobile-Executed Hand-Off in Cellular ATM Networks, IEEE J. Sel. Areas Comm., Vol. 12, No. 8, Oct. 1994; A. S. Acampora and M. Naghshineh, Control and QoS Provisioning in High Speed Microcellular Networks, IEEE Personal Communications, Vol. 1, No. 2, 2Q 1994; M. Naghshineh and A. S. Acampora, Design and Control of Micro-Cellular Networks with QoS Provisioning for Real Time Traffic, J. High Speed Networks, Vol. 5, No. 1, 1996; and M. Naghshineh and A. S. Acampora, Design and Control of Micro-Cellular Networks with Supporting Multiple Lanes of Traffic, Wireless Networks. Vol. 2, No. 3, August 1996. See also U.S. patent nos. 5,528,583 for a METHOD AND APPARATUS FOR SUPPORTING MOBILE COMMUNICATIONS IN MOBILE COMMUNICATIONS NETWORKS; 5,497,504 for a SYSTEM AND METHOD FOR CONNECTION CONTROL IN MOBILE COMMUNICATIONS; and 5,487,065 for a METHOD AND APPARATUS FOR SUPPORTING MOBILE COMMUNICATIONS IN ASYNCHRONOUS TRANSFER MODE BASED NETWORKS to the selfsame A. Acampora who is the inventor of the present invention. The contents of these prior patents are incorporated herein by reference.

In the preferred embodiment, the picocellular base stations are themselves interconnected by a dense mesh of highly focused, free-space optical or millimeter wave links which are physically short in length, i.e. under several hundred feet. As will be shown, the shortness of these links, and their highly focused nature, provides excellent margin against fog and other atmospheric disturbances (essentially 100% availability). Also, although the transmitters and receivers of the free-space optical links must be spatially aligned, the tolerances are such that the links can easily withstand extreme mechanical disturbances such as strong wind force. In an alternative arrangement, the picocell base stations are interconnected by highly-focused, point-to-point, millimeter wave beams.

By means of these free-space optical (or millimeter wave) links, traffic generated within (or delivered to) any picocell will, in general, be relayed among a sequence of base stations in a multi-hop arrangement, eventually entering (or leaving) the wired network at a regional "end office". The picocellular base station, itself, is a small stand-alone unit containing a power supply, antenna, radio equipment, baseband processing equipment, a small packet switch (needed to relay traffic), and several optical (or millimeter wave) transceivers, each aimed at a different one of the neighboring picocellular base stations. The richness of the optically-based (millimeter-wave-based) interconnecting mesh, and its alternative routing capabilities, serve to balance the traffic among the optical links and, also, to vastly improve system reliability. For communications upon a hardware- and software-scalable optical network (employing wavelength- routing, wavelength reuse and multi-hop packet switching; not all of which features are required in the system of the present invention) see The Scalable Lightwave Network by A. S. Acampora appearing in IEEE Communications Magazine, Vol. 32, No. 12, December 1994.

The second tier of cells is more conventional in appearance. Each "standard cell" covers an area with a diameter measured in terms of miles or tens of miles, and a variable number of picocells (ranging from zero to, perhaps, several thousand) is

contained within its footprint. The base station of a standard cell attaches directly to an end office. Each standard cell serves three purposes: (1) extension of service to any location not served by a picocell; (2) extension of service to any vehicles traveling at a speed too great to be accommodated via picocellular handoff; and (3) provisioning of an alternate means to access the service office in the event of a picocellular failure and/or interruption of all of its optical links. Since a standard cell handles only the overflow traffic not served by its subtended picocells, it is envisioned that its telecommunications traffic burden will remain modest.

The highest tier contains a contiguous raster of megacells, each with a typical diameter of several hundred miles. The megacells (1) provide access from locations covered by neither a picocell nor by a standard cell, and (2) insure universal availability. It is envisioned that the megacells will be created by a constellation of Low Earth Orbit (LEO) satellites. Once again, since a megacell handles only the overflow traffic from its subtended standard cells and picocells, its traffic burden should remain modest.

Because the footprint of a picocell is so small, its bandwidth is shared by only a small number of users (possibly only one), and each subscriber thereby enjoys broadband service. By re-using the radio spectrum sufficiently often, the problem of limited availability of spectrum is surmounted. Furthermore, since each picocellular base station is served by its free-space optical and/or millimeter radio links, new buried broadband cabling apparatus is unnecessary, and the capacity constraint of existing copper wiring is surmounted. Finally, the standard cells and megacells extend service to regions not covered by picocells, improve reliability, and serve high-velocity vehicles for which hand-off among picocells might be problematic; assuring universal service with no blackout regions.

Note that broadband access is not only extended to homes and offices but, moreover, the access enjoys the additional virtue of being tetherless. Both pedestrians and vehicles are readily served.

- 10 -

The preferred telecommunications system is based on Asynchronous Transfer Mode (ATM) transport. Although this assumption is not essential, ATM supports the type of virtual connectivity and instantaneous, on-demand access to bandwidth presently preferred for serving newly emerging types of non-voice traffic. Thus, all interfaces (radio at all three tiers, free-space optical, and serving office) are assumed to be ATM. For the preferred system, the radio links support a peak data rate of, typically, 20 Mbits/sec, and no optical link is operated at a rate greater than, typically, 155 Mbits/sec. Also, although it is not mandatory, it is further assumed that the backbone wired network is based on ATM.

2. First Aspect of the Invention: A Dual-Spectrum Telecommunications Apparatus

In accordance with a first aspect of the present invention, a telecommunications apparatus includes (i) a communications switch, (ii) a first transceiver, electrically coupled to the communications switch, for wirelessly telecommunicating externally to the apparatus in a first portion of the electromagnetic spectrum, and (iii) at least one second transceiver, electrically coupled to the communications switch, for wirelessly telecommunicating externally to the apparatus in a second portion of the electromagnetic spectrum that is of higher frequency than is the first portion. A controller causes the communications switch to route telecommunications traffic between the first transceiver and the second transceiver. Accordingly, by operation of the apparatus wireless telecommunications are routed between a first and a second, higher frequency, portion of the electromagnetic spectrum.

The first transceiver is preferably a radio transceiver. The second transceiver is preferably a transceiver of free-space optical telecommunications signals. In this embodiment wireless telecommunications are routed between radio and optical portions of the electromagnetic spectrum.

The communications switch preferably operates under the Asynchronous Transfer Mode protocol.

In the preferred embodiment, the optical transceiver includes at least one, and preferably four or more, optical-receivers -- each receiving free-space optical telecommunications signals over a different free-space optical path -- coupled with
5 a like number of optical transmitters -- each transmitting free-space optical telecommunications signals over a different free-space optical path. By this construction free-space optical telecommunications may be simultaneously maintained over a plurality of different free-space optical paths.

10 The controller preferably further acts to cause the communications switch to further route telecommunications traffic from the optical receivers to the optical transmitters. In this manner wireless telecommunications are not merely routed between the radio and the optical portions of the electromagnetic
15 spectrum, but are also routed between free-space optical paths.

The telecommunications apparatus so constructed, and so operating, is typically situated in a wireless telecommunications mesh of a large number of identical apparatus. Wireless telecommunications in the radio portion of the electromagnetic
20 spectrum are local to each radio transceiver in each apparatus. Wireless free space optical telecommunications transpire between the optical transceivers of apparatus that are physically proximately located. Telecommunications are thus not only routed between the radio and the optical portions of the electromagnetic
25 spectrum, but are also second-routed between a number of free-space optical paths (all of which paths are, or course, in the optical portion of the electromagnetic spectrum).

This first aspect of the present invention may be equivalently considered to be embodied in a dual-spectrum
30 telecommunications method. In the method a locally wirelessly telecommunicated signal of a first frequency (i.e., radio) is telecommunicated in a first-frequency local transceiver. A number of locally wirelessly telecommunicated signals of a second frequency (i.e., optical) are telecommunicated in a plurality of
35 directional transceivers suitable to this second frequency, which is higher than the first frequency. Conversion is performed between the first-frequency wirelessly telecommunicated signal

at the first-frequency local transceiver and a second-frequency wirelessly telecommunicated signal at a selected one of the plurality of second-frequency local transceivers. Which particular one of the second-frequency local transceiver is so
5 selected, and converted, is in accordance with a system-wide protocol for telecommunicating along a chosen directional path. Meanwhile second-frequency (i.e., optical) signals locally telecommunicated at any one of the plurality of second-frequency
10 local transceivers are cross-coupled to another one of the plurality of second-frequency local transceivers, thereby to advance the second-frequency signal along a chosen directional path that is also in accordance with the protocol.

By this method, and even though all transceivers are local, the first-frequency signal is immediately converted to a second-
15 frequency signal, and is further telecommunicated, whensoever and wheresoever received. Meanwhile the second-frequency signals are further telecommunicated along a chosen directional path.

3. Second Aspect of the Invention: A Telecommunications Method Upon a Mesh Network

20 In accordance with a second aspect of the present invention, a telecommunications method is conducted upon a mesh network of arrayed nodes. The method includes (i) wirelessly locally radio telecommunicating to a radio transceiver at a node by radio, and
25 (ii) wirelessly locally directionally optically free-space telecommunicating to each of a plurality of optical transceivers, co-located with each other and with the radio transceiver at the node, by a plurality of directional free-space optical signals.

Telecommunications to and from the radio transceiver are routed to and a selected one of the plurality of optical
30 receivers. The optical receiver is so selected in accordance with a protocol for telecommunicating along a chosen path upon the mesh.

Meanwhile, telecommunications received at one or more of the plurality of second-frequency local transceivers at the same node
35 are routed to another one or ones of the plurality of second-frequency local transceivers. By this routing telecommunications

is established and maintained along a path upon the mesh that is chosen in accordance with the protocol.

The wireless local radio telecommunicating is preferably by broadband radio in a broadband radio transceiver. Moreover, the radio telecommunicating preferably transpires in accordance with Asynchronous Transfer Mode wireless telecommunications protocol - as does, preferably also, the wireless local optical free-space telecommunicating.

In greater detail, the protocol for all this telecommunicating along a chosen path upon the mesh is developed at a node, called an end-office, that is common to all paths. Implementation of this protocol may be shared with selected processors distributed among the arrayed nodes, which processors are upon the chosen path, or may even be done entirely among these distributed processors. If the telecommunicating device at the telecommunicating cell identifies itself as roaming, or commences to roam, then the implementation of the protocol may even be distributed among all the processors of all the arrayed nodes of the mesh.

This may sound more complex than it is. All that happens is that a virtual path is established between communicating entities on the net. The only pertinent questions are: (i) where and how is this virtual path established; and (ii) which nodes need to know about the virtual path so established? Establishing such a virtual communication path is routine in cellular telephony -- although the present invention is the first instance, as will be explained, to conventionally so compute and to so use a virtual path that lies in substantial part upon a mesh network. The answers are: (i) at the end office, and (ii) some selected nodes, up to potentially all nodes. It is in particular not troublesome that, in the case of a roaming radio transceiver, a node upon the mesh which node is physically remote from that node where the radio transceiver is currently located should, nonetheless to this node's current non-involvement in the current communications path, keep track of a virtual path which would, if the roaming radio transceiver was someday to enter this node, permit of communication upon the mesh because, after all,

resource is only consumed when the virtual communications path becomes a real communications path. If an extremely large number of virtual paths were to be constantly dynamically established and re-established upon the net such as might be due, for example, to thousands of simultaneously roving radio transceivers (for example, cellular telephones), then the communication and simultaneous maintenance of associated thousands of virtual paths at and upon all the nodes of the net could result in a communications control "overhead". However, it must be realized that the vast number of radio transceivers are not roaming, and are instead stationary or semi-stationary in single cells comprising buildings or the like. Consequently, there is no insurmountable challenge to calculating and to maintaining all necessary virtual, and to exercising all real, communications paths.

4. Third Aspect of the Invention: A Telecommunications Station, Called a "Base Station"

In accordance with a third aspect of the present invention, a telecommunications station, called a "base station", is located within both (i) a radio cell, and (ii) a multi-hop free-space optical telecommunications mesh of a large number of identical base stations geographically dispersed.

Each such base station includes (i) a communications switch, (ii) a radio transceiver, electrically connected to the communications switch, for wirelessly telecommunicating by radio locally externally to the base station, and (iii) a number (preferably four, at each point of the compass) of optical transceivers, electrically connected to the communications switch, for wirelessly telecommunicating externally to the base stations by associated free-space optical links.

A (iv) controller causes the communications switch to route (i) telecommunications traffic received by the radio transceiver to the optical transceivers, and (ii) also optical telecommunications traffic received at one optical transceiver to another optical transceiver for free-optical optical transmission.

All this routing, and all this telecommunicating, is to the consistent purpose and end that telecommunications traffic to and from the radio transceiver (i) is first routed through a co-located optical transceiver and (ii) is then further routed through the optical transceivers (of whatsoever number of other base stations as are required) until reaching a selected optical transceiver of a particular base station (called an "end office" base station).

Accordingly, radio and free-space optical communications upon the mesh support telecommunications between, on the one hand, (i) a radio transceiver of a base station and, on the other hand, (ii) a optical transceiver of the particular base station called the "end office".

The "end office" base station has a communications switch connected to a communications backbone external to the system. Other "end-office" base stations also connect to this communications backbone.

A number, typically four, of optical transceivers that are electrically connected to the "end-office" communications switch wirelessly optically externally telecommunicate. They do so in order to (i) receive across the free-space optical telecommunications links the telecommunications traffic received by all the radio transceivers of all the base stations, and in order to (ii) transmit telecommunications traffic received from the communications backbone to a particular radio transceiver of a particular base station.

A controller causes the "end-office" communications switch to route communications traffic between, on the one hand, the wired connection to the external communications backbone and, on the other hand, the plurality of "end-office" optical transceivers.

By this operation both (i) radio, and (ii) free-space optical telecommunications are bi-directional between the end-office and each radio transceiver of all base stations.

5. Fourth Aspect of the Invention: A Telecommunications System

In accordance with a fourth aspect of the present invention,

the "base station" and the "end office" telecommunications stations just discussed in the previous section 3 can be combined into an entire telecommunications system.

In such a telecommunications system an "end-office" includes
5 (i) a communications switch, (ii) a hardwired connection between the switch and a communications backbone external to the system to which communications backbone other end-offices also connect, (iii) a number of optical transceivers, electrically connected to the communications switch, for telecommunicating externally
10 to the end-office optically through free space, and (iv) a controller for causing the communications switch to route communications traffic between the hardwired connection to the external communications backbone and the plurality of optical transceivers.

15 This "end office" is used with, and as a part of, a multi-hop mesh of radio-telecommunicating and optically-free-space-telecommunicating "base stations". Each "base station" includes (i) a communications switch, (ii) a number of optical transceivers, electrically connected to the communications
20 switch, for wirelessly telecommunicating externally to the base station by free-space optical links, and (iii) a controller for causing the communications switch to route received optical communications traffic from a receiving to a transmitting optical transceiver. The routing is to the purpose and the end that
25 telecommunications traffic at any individual base station will be free-space optically communicated through whatsoever number of base stations is required until it is telecommunicatively connecting to the "end office" (and then to the communications backbone).

30 Notably, and as is characteristic of meshes, the free-space optical communications upon the mesh are variably routed from one base station to another.

To this mesh optical telecommunications system -- which is already arguably of an interesting form employing as it does both
35 free-space optical links and dynamic link routing -- the present invention preferably makes the momentous addition of cellular radio.

- 17 -

Such an "enhanced" telecommunications system is, of course, a multi-hop mesh of optically-free-space-telecommunicating base stations that are additionally radio-telecommunicating. Each of these radio-telecommunicating and optically-free-space-telecommunicating base stations has, in addition to its communications switch and its optical transceivers and its controller, certain additional components.

Namely, a radio transceiver is electrically connected to the communications switch for wirelessly communicating by radio externally to the base stations. When this radio receiver is present the controller is further causes the switch to route communications traffic between the radio transceiver and the optical transceivers.

More particularly, the controller causes the communications switch (i) to route telecommunications traffic between the radio transceiver and the optical transceivers, and (ii) to route received optical communications traffic from a receiving to a transmitting optical transceiver. All routing is to the purpose and the end that local telecommunications traffic at the radio transceiver is free-space optically communicated step-wise regionally through the optical transceivers of whatsoever number of base stations are required to and from the end office, and upon the communications backbone. In this manner, radio telecommunications local to one base station are free-space optically telecommunicated upon the mesh until ultimately communicatively interconnecting to the communications backbone - the forte of the present invention.

6. Fifth Aspect of the Invention: A Hybrid Telecommunications System

By this time it should be clear that the present invention is most significantly manifest in a telecommunications system (i) where some telecommunication is local within a cell (normally at a lower frequency, typically radio) and (ii) where some, related and continuing, telecommunication transpires upon the links of mesh network (normally at higher frequency, and typically upon free space optical links).

The present invention is thus found in a hybrid telecommunications system typically having both (i) radio telecommunications, and (ii) optical telecommunications. Such a hybrid telecommunications system is characterized in that
5 telecommunications from each of a great multiplicity of end users into the system is by cellular radio at a one of a plurality of hierarchical cell levels. A user radio transceiver that is unable to telecommunicate into the system at a lower cell level will attempt to communicate into the system at a next higher cell
10 level and so on until access is finally obtained.

If and when cellular radio telecommunications access is achieved at a lowest system level, which is overwhelmingly the most common case, ensuing telecommunications will transpire across optical links organized as a mesh. Optical links at each
15 node of the mesh direct merge such individual cellular radio telecommunications as may be from time to time accessed at that node of the mesh into other optical communications traffic carried upon the mesh. This continues until, optical communication links having been joined throughout the mesh, the
20 cellular radio telecommunication at each node is ultimately communicatively interconnected to a central, end-office, node or the mesh.

If the cellular radio communications access transpires at a system level other than the lowest, then the ensuing
25 telecommunications signals will be carried directly between the station where access is achieved and the end-office switch by means of a conventional point-to-point communications link such as wire, fiber, or directed radio beam.

Telecommunication with at least some (and normally all)
30 optical links (as do access cellular radio telecommunications) preferably transpires by free space optical links. Communication with the central node or end-office is, in addition to optical communication links upon the mesh, preferably also by fiber optic cable.

35 The present invention may similarly be found in a hybrid radio and optical telecommunication method that includes in the same telecommunications system both (i) telecommunicating by

radio, and (ii) telecommunicating by optics. Such a method is characterized in that each of a great number of end users telecommunicate into the telecommunications system by cellular radio at a one of a plurality of hierarchical cell levels. A user radio transceiver that is unable to telecommunicate into the system at a lower cell level will attempt to communicate into the system at a next higher cell level and so on until access is finally obtained.

After cellular radio telecommunications access to the system is so finally obtained, telecommunicating will then most commonly transpire across optical links organized as a mesh, the optical links at each node of the mesh merging such local cellular radio telecommunications as is from time to time accessed at that node into other optical communications traffic carried upon the mesh until, optical communication links being joined throughout the mesh, cellular radio telecommunication at each mesh node is ultimately communicatively interconnected to a central node, or end-office.

7. Sixth Aspect of the Invention: A Virtual Communications Upon a Mesh Network, Particularly as Exists in Free Space

The present invention employs a routing algorithm of a conventional nature to establish a virtual connection path between two communicating entities -- a terminal device at a base station and a home office -- so that Quality of Service (QOS) for the entire network is maintained. (If it is impossible to establish a communications path while maintaining minimum QOS, communications is normally denied.) For the communications routing back and forth between each base station and the end office, all connections are virtual, or "virtual connections". The route selection process, or algorithm, establishes these virtual connections.

At the onset, it may be noted that the communications traffic that is carried upon the communications paths between each base station and the end office is of nature, typically voice or digital data, that has heretofore been carried to the end-user on dedicated lines or links called "pipes". As just

stated, the present invention is opposite, establishing and using virtual trees, and virtual connections, for all communications between base stations and the end offices.

5 In so doing, the present system is somewhat reminiscent of cellular telephony, where connections in the form of pipes of a limited duration are established and re-established as a telecommunicating device roams within a telecommunications area. There are differences, however. To the best knowledge of the inventor, the present invention is the first to ever contemplate
10 establishing, and using, virtual connections on a mesh network, particularly one that is (i) in free space and/or such as may be implemented by (ii) free-space optical links and/or millimeter wavelength radio.

Moreover, some of the links of the mesh network (as are
15 associated with some one or some few of the base stations) may permissibly be, as has been explained, a direct optical, or a radio, or a wire, or a fiber, link between some base station and an end office. (To the extent that the link is wire or fiber, then to that extent the mesh network is no longer 100% "free
20 space".) Notably, the virtual connectivity principle of the present invention still holds true. Virtual connections are readily made upon mesh networks having different links, including even such wire and fiber links as have heretofore been inflexibly associated with pipes, just as surely (and easily) as they are
25 made upon mesh networks uniformly consisting of only free-space optical, or millimeter wavelength radio, links. Therefore the present invention will also be realized to occasionally use types of communications channels associated with pipes -- i.e., wire and optic fiber -- in a virtual communications network where
30 these channel types have not previously been found.

Therefore, the present invention may be considered to be embodied in a communications system having a mesh network communicatively interconnecting a multiplicity of communication switches, and logic for establishing virtual communication paths
35 upon the mesh network between ones of the multiplicity of communication switches. The communications system's mesh network preferably telecommunicatively interconnects the multiplicity of

communication switches, typically (but not exclusively) by and on free-space telecommunications links that may typically (but not exclusively) be free-space optical telecommunications links and/or free-space millimeter wavelength radio telecommunications links.

The logic establishing virtual communication paths upon the mesh network between ones of the multiplicity of communication switches so establishes the virtual communications links in form of a tree (the virtual communication paths from the multiplicity of communication switches focusing to a root node communication switch called an end office).

The logic for establishing virtual communication paths upon the mesh network between ones of the multiplicity of communication switches may be (i) located at the end office, (ii) distributed between the end office and some other ones of the multiplicity of communication switches or (iii) distributed between among all the multiplicity of communication switches.

These and other aspects and attributes of the present invention will become increasingly clear upon reference to the following drawings and accompanying specification.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a diagram of a multi-tier radio-access telecommunications system in accordance with the present invention; three tiers are illustrated.

Figure 2 is a diagram of the optical interconnection of picocells by and within a dense optical mesh in the multi-tier radio-access telecommunications system in accordance with the present invention previously seen in Figure 1.

Figure 3a is a schematic block diagram of a first embodiment of a base station apparatus used within each picocell of the multi-tier radio-access telecommunications system in accordance with the present invention previously seen in Figure 1.

Figure 3b is a diagrammatic view of a typical installation of the first embodiment of the base station apparatus previously

seen in Figure 3a.

Figure 3c is a diagrammatic view of a typical installation of a second, millimeter wavelength radio linked, embodiment of a base station apparatus.

5 Figure 3d is a diagrammatic view of a typical installation of a base station apparatus similar to that of Figures 3a and 3b, or Figure 3c, now installed in an end office, the apparatus having when so installed wired connection to communications switching equipments which are in turn connected to a world-wide
- 10 wire/fiber line backbone.

Figure 4 is a diagram of the optical mesh, including end-office links, by which optical interconnection of picocells transpires in the multi-tier radio-access telecommunications system in accordance with the present invention.

15 Figure 5 is a diagram of the optical mesh, including one end-office link, previously seen in Figures 2 and 4; equal-traffic "zones" to the end-office link being illustrated.

Figure 6 is a diagram of a regular rectangular optical mesh, including multiple end-office links, by which optical
20 interconnection of picocells transpires in the multi-tier radio-access telecommunications system in accordance with the present invention.

Figure 7a is a diagram of a first case, wherein message traffic is restricted within a domain, of message traffic
25 occurring on the regular rectangular optical mesh previously seen in Figure 6.

Figure 7b is a diagram of certain particular, cross, links arising in the first case of the message traffic restricted within a domain previously seen in Figure 7a.

30 Figure 8, consisting of Figure 8a through Figure 8d, are diagrams of a second case, wherein message traffic is restricted within a quadrant, of message traffic occurring on the regular rectangular optical mesh previously seen in Figure 6.

Figure 9, consisting of Figure 9a through Figure 9c, are
35 diagrams of a third case, wherein message traffic is restricted within a semi-quadrant, of message traffic occurring on the regular rectangular optical mesh previously seen in Figure 6.

Figure 10a is a diagram of a first virtual connection tree for the optical mesh, by which optical mesh optical interconnection of picocells transpires in the multi-tier radio-access telecommunications system in accordance with the present invention.

Figure 10b is a diagram of a second virtual connection tree for the optical mesh, alternative to the connection tree of Figure 10a, by which optical mesh optical interconnection of picocells transpires in the multi-tier radio-access telecommunications system in accordance with the present invention.

Figure 11 is a graph of the power budget of an optical link on the optical mesh of the multi-tier radio-access telecommunications system in accordance with the present invention.

Figure 12 is a graph of the bit error rate and an optimal threshold, OOK modulation being employed, of an optical link on the optical mesh of the multi-tier radio-access telecommunications system in accordance with the present invention.

Figure 13 is a graph of the atmospheric absorption at 2 km above sea level of an optical link on the optical mesh of the multi-tier radio-access telecommunications system in accordance with the present invention.

Figure 14 is a graph of the visual range compared to attenuation at 800 nm wavelength for an optical link on the optical mesh of the multi-tier radio-access telecommunications system in accordance with the present invention.

Figure 15 is a graph of the attenuation due to rain (at 800 nm wavelength) for an optical link on the optical mesh of the multi-tier radio-access telecommunications system in accordance with the present invention.

Figure 16 is a graph of the attenuation due to snow (at 800 nm wavelength) for an optical link on the optical mesh of the multi-tier radio-access telecommunications system in accordance with the present invention.

Figure 17 is a graph of the scintillation effect on beam

intensity for an optical link on the optical mesh of the multi-tier radio-access telecommunications system in accordance with the present invention.

Figure 18 is a graph of the wind bending effect on the support poles for an optical link on the optical mesh of the multi-tier radio-access telecommunications system in accordance with the present invention.

Figure 19 is a diagrammatic view of the preferred embodiment of a base station optical transceiver on the optical mesh of the multi-tier radio-access telecommunications system in accordance with the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENT

The basic approach to a multi-tier radio-access telecommunications system in accordance with the present invention is discussed in section 1. Section 2 contains a discussion of considerations in routing signals upon the optical mesh. Section 3 contains a description of the handoff of signals, and explains the concept of an embedded virtual connection tree. Section 4 contains descriptions of exemplary radio and optical links of the telecommunications system of the present invention, along with some representative calculations of system's capacity and of the performance margins of its optical links.

1. Description of the Multi-tier Radio-access Telecommunications System

A multi-tier radio-access telecommunications system in accordance with the present invention where large radio cells are superimposed upon smaller radio cells in a multi-tiered hierarchy (three tiers are representative, and illustrated) is depicted in Figure 1. Each of many picocells 1 (tier 1) is created by a small, premises-based or near-premises-based, base station (to soon be shown in Figure 3). Subscribers normally attach for communicating via their home or office base station and, through

4 this base station, enjoy complete freedom to roam within the home
or office environment and, to some extent, externally to the
building as well.

5 If a subscriber should leave the area served by his or her
home or office base station, then service is handed to either the
base station serving the adjacent building, if there was to be
no gap in coverage, or else to the base station of one of a
number of standard cells 2, the service domain of each which
spans from zero to many picocells 1. Finally, if a user should
10 enter some environment serviced neither by any of the standard
cells 2 nor by any picocells 1, then service is extended via one
of a number of megacells 3, having a range of coverage that spans
zero to many standard cells 2. Service among megacells 3 is
contiguous.

15 The tier-1 base station may be, essentially, an item of
consumer electronics that is either sold or leased to the
residential or business subscriber. Alternatively, the tier-1
base station may be owned by the service provider and installed
on property owned or leased by the service provider. If a
20 subscriber places a call through his or her own subscriber unit,
billing for the service will be to that unit. If the subscriber
places a call through a neighboring subscriber unit, then the
subscriber's terminal equipment (e.g., his or her cellular
telephone), must request third party billing at call set-up time
25 so that the home subscriber unit, and not the neighboring unit
servicing the call, will be billed for service. Hand-off is
fully supported, both among peer cells at the same tier and among
cells at different levels in the hierarchy.

30 The primary purpose of tier 1 is to provide adequate
capacity to serve most users, thereby dramatically reducing the
demand placed upon tier 2. Selected base stations at tier 2
connect directly to core, or end-office (network) switches 12,
as shown in Figure 1. Understand that Figure 1 is a schematic
diagram, and not a physical map. The end-office switches 12 are
35 commonly physically located directly among the picocells 1 that
they serve to communicatively interconnect. However, since tier
1 base stations are residential or office units, new means must

be provided to interconnect these stations to the core network.

As shown in Figure 2, these new means include short, free-space, bi-directional optical links interconnecting the tier-1 base stations in a rich optical mesh. Each tier-1 base station thereby serves two functions. First, it accepts information from (and delivers information to) each terminal unit within its footprint service area (a one of the picocells 1) via radio. Second, it serves as a cooperating relay station, accepting information (in the form of addressed data packets, possibly ATM cells) from in-bound optical links and routing such information onto the correct outbound optical link.

As shown in Figure 3a, the apparatus of a tier-1 base station includes (i) several optical transmitters and receivers, or optical transceivers 112, (ii) the radio and baseband equipment illustrated as receive antennas and demodulator 111, (iii) a small electronic packet switch, preferably an ATM switch 112, and (iv) a small control processor 114 to manage the base station and serve as the local representative of the network control system. The radio equipment 111 includes all apparatus needed to accept/deliver signals from/to the ATM switch 113 and deliver/accept these to/from the antennas 111 (partial).

Figure 3b is a diagrammatic representation of the physical installation of the apparatus of the base station as it might be installed in the attic of a home. The optical transceivers 112 are located in free space outside any building. The remaining radio and baseband equipment 111, ATM switch 113 and control processor 114, including the baseband antenna 111 (partial) are normally housed inside a building, and are represented by the labels "electronics" and "antenna".

An equivalent diagrammatic view of a typical installation of a second, millimeter wavelength radio, embodiment of the base station apparatus is shown in Figure 3b. Everything is the same as in Figure 3b except radio transceivers 112a (operative in millimeter wavelength radio spectral regions, and not to be confused with the baseband radio 111) replace the optical transceivers 112 (shown in Figures 3a and 3b).

Each transceiver of the optical (Figures 3a, 3b) or

millimeter wavelength radio (Figure 3c) types communicates, normally by line of sight, to a transceiver of a like type.

A diagrammatic view of a typical installation of a base station apparatus similar to that of Figures 3a and 3b, or Figure 3c, as is now installed in an end office switch 12 (shown in Figures 1 and 2) is shown in Figure 3d. The apparatus so installed has a wired connection to conventional (end-office) communications switching equipments. These equipments which are in turn connected to a world-wide wire/fiber line backbone.

Returning to Figure 3a, the packet, or ATM switch 113 is needed so that, in addition to serving as source and sink of the traffic placed onto the optical network, each base station can relay (hop) packets from one optical link to the next. These multi-hopping transmissions occur along a route (a set of links) chosen at connection set-up time so as to maintain Quality-of-Service (QoS) guarantees. Each packet hops along successive links in accordance with information contained within the packet until it arrives at an entry/exit port of the core network (for packets traveling along the access network toward the core network), or else at the terminating tier-1 base station (for packets being distributed from the core network to the tier-1 base stations of the access network). Multi-hopping is important to permit use of very short free-space optical links as are needed to insure freedom from atmospheric disturbances and good link availability, and as are needed in certain areas to overcome obstacles such as hills and buildings.

The preferred dimensionality of the packet (or ATM) switch is at least 5 x 5, so that, in addition to the signals arriving from/ being sent to the radio interface, at least four optical transceivers can be supported. Note that this small packet switch is normally an electronic switch; both radio and optical packets are first converted to baseband electronic signals prior to switching, as in most multi-hop arrangements.

The multi-hop architecture is well-known within the field of multi-wavelength optical networks. However, its present application to free-space optical networks is believed to be novel, as is the overall approach whereby tiers of base stations

are created, the lowest tier being interconnected by a new free-space optical network so as to avoid local wireline bottlenecks. See A. S. Acampora, A Multichannel Multi-hop Local Lightwave Network, Conference Record, 1987, Globecom, Tokyo; and C. A. Brackett and A. S. Acampora, et al., A Scalable Multiwavelength Multi-hop Optical Network, IEEE J. Lightwave Tech., Vol. 11, No. 5/6, May/June 1993.

The actual interconnection pattern of the optical interconnection network in accordance with the present invention may be that of a recursive grid, a quasi-rectangular mesh in which nesting of access stations (tier-1 base stations, in the present case) into sub-levels is permitted so as to make possible the easy addition of new access stations (modular growth) without disturbing any more than one pre-existing link. See A. S. Acampora, The Scalable Lightwave Network, IEEE Comm. Mag., Vol. 32, No. 12, Dec. 1994; and A. S. Acampora, Architectures for Hardware and Software Scalable Multiwavelength Networks, Photonics Networks, Kluwer Academic Publications, 1997.

An additional benefit of the recursive grid is its compatibility with existing scalable routing algorithms, meaning that the computational complexity associated with the establishment of a multi-hop route for a new virtual connection scales but linearly with the number of nodes in the grid. That is, the computational complexity per node is independent of the number of nodes. Since, for the purposes of this specification disclosure, any topology can be chosen for the optical mesh, the interested reader is referred to the literature for additional information concerning general background to the recursive grid.

Multi-hop routing for the preferred radio access system of the present invention is easiest to explain assuming fixed-point service, that is, with no handoff; routing with hand-off will be covered in Section 3. For fixed-point service, the route either to or from a given base station -- which route will be taken by the packets associated with a given virtual connection flow -- is comprised of a sequence of links chosen by an Admission Controller at call set-up time. When choosing this route, the Admission Controller must guarantee that all Quality-of-Service

(QoS) objectives are met. This means not only that each optical link in the sequence can accommodate the new virtual connection without unacceptable QoS degradation but, also, that the terminal radio cell can accommodate the new virtual connection. If hand-off is supported (both among clusters of picocells, and between picocells and standard cells), then, as will be explained in Section 5, the admission decision must also guarantee that the overall traffic intensity (new calls plus pre-existing calls) presented to the cell cluster remains acceptable.

10 | Signaling for new connection requests is handled in a quite conventional fashion. Namely, a permanent signaling virtual channel connection exists between each base station and a control computer located within the end-office. When the control computer receives a request for communications from, or to, a 15 | (radio-telecommunicating) subscriber device at a subscriber base station, then it calculates the multi-hop routing of packets on the optical network to establish this communication. In this regard the control computer is functioning no differently than a standard (wired) telephone network switching computer, or at 20 | least those that manage communications over multiple paths that offer redundancy.

Finally, to vastly improve dependability of the free-space optical mesh, a set of back-up virtual routes is established at the time that the admission decision is made. The back-up routes 25 | are established so that, in the event of a link failure or transient interruption of the optical beam, alternate routing can be instantaneously effected with minimal information loss. In general, virtual resources must be reserved on each optical link to accommodate instantaneous alternate routing. Although this 30 | back-up routing can readily be realized simply by devoting more system resource to each communications path (consider, for example, that two complete paths might be established at each admission decision), optimization of this back-up remains an open issue not addressed in this specification disclosure. Back-up 35 | routing would preferably involve the selection of primary and alternate routes so that, in the event of a single link failure, the additional traffic burden placed on the surviving links would

- 30 -

be minimized, that is, the virtual resources reserved for failure recovery should comprise only a small fraction of a link's capacity. This suggests that primary and alternate routes be chosen such that in the event of a link failure or transient
5 disruption, the re-routed traffic be smeared over as many disjoint paths as possible.

2. Routing in the Optical Mesh

Of primary consideration to the flow of traffic along the links of the optical mesh is the avoidance of traffic bottlenecks or "hot" spots. The situation depicted in Figure 4 is drawn for
10 a simple topology in which the optical mesh consists of a rectangular grid and each cross-point represents a single tier-1 base station.

A portion of the tier-1 access network is shown in Figure
15 4. The purpose of this portion is to deliver traffic generated within the picocells to the end-offices (of which two such are illustrated), and to distribute traffic from the end-offices to the picocells. Each end-office attaches to some number of neighboring tier-1 base stations by means of short free-space
20 optical links. Note that the base stations that are connected to an end-office need an additional optical transceiver beyond the number needed by other base stations.

To maintain their dependability, the optical links must be kept short, and the number of base stations connected to an end-
25 office is correspondingly limited. The objective is to route each virtual connection such that the flow of traffic is evenly distributed among the limited number of optical links leading directly to/from an end-office.

Some simple calculations are in order. Suppose that all
30 picocells generate the same level of traffic intensity, C , and suppose that each end-office is responsible for N base stations. Let each end-office be equipped with L optical links. Then, assuming that traffic can be "balanced" among these L links each must handle a traffic intensity $C_L = NC/L$. (Note that, in
35 general, other optical links will handle a lesser traffic intensity since, in the preferred multi-hopping arrangement, the

traffic handled by the optical links grows as traffic is relayed toward the end-offices).

A traffic intensity $C_L = NC/L$ provides a "best case" relationship among the number of optical links needed per end-office (L), the multi-hop capacity deflator (C_L/C , the ratio of the required link capacity normalized by the delivered user or picocell capacity), and the number of picocells supportable by an end-office. It is the objective of routing in the optical mesh to "smear" so that this traffic relationship applies as best as is possible. While "optimum" routing should be considered to be an open research problem, some simple observations and heuristics permit developing reasonable approach to routing..

2.1. A "Zoned" Approach to Routing

First, it is possible to define a δ zone associated with each "finger", or optical link, emanating from an end-office. Referring to Figure 5, a zone is defined to be a set of base stations chosen such that (1) traffic associated with all base stations of a given zone enters/exits the end-office through a common finger, and (2) the same traffic intensity is associated with all zones.

The objective of the routing algorithm, then, is to choose a route for each new call attempt such that all traffic associated with a given zone enters/exits the end-office through that zone's finger. Such zones may be permanently defined based on the average traffic intensity presented by each picocell. Alternatively, to achieve better routing efficiency, zones may be dynamically defined in response to instantaneous traffic patterns. For example, in the latter case, the zone associated with a currently lightly-loaded finger might be adaptively enlarged to include a greater number of base stations, while the zone associated with an adjacent heavily-loaded finger might be reduced to include a smaller number of base stations, such that, for future calls, it is more likely that a route will be chosen through the lightly-loaded finger. Then, as new virtual connections are made and old ones are terminated, the boundaries of the zones will continuously adapt in an attempt to maintain

load balance among the fingers.

Note that, with such a "zoned" approach, traffic originating or terminating within a base station at the boundary of two zones may be bifurcated to best achieve load balance. In a similar spirit, traffic originating or terminating within a base station on the boundary of two zones served by two different end-offices may be bifurcated among those offices (furthermore, when adapting the "footprint" of a zone to the prevailing traffic, a given base station can be re-assigned, for future calls, to a different end-office if this will facilitate load balancing).

Note further that the geometrical boundaries of the zones may be quite irregular. It is the intent to capture a common traffic intensity within all zones (for permanently assigned zones), and to tailor the zonal boundaries to the remaining available capacity of the fingers (for dynamically assigned zones). Both the traffic generated within a given picocell, and the geometrical deployment of picocells, are very much demographically dependent. In general, one should not expect uniform spacing of the picocells as might be (incorrectly) implied from Figure 5, which is intended only to show a connectivity pattern among cells but which does not speak at all to their spacing.

Finally, note also that the richness of the mesh, the possibility of bifurcating traffic among fingers and end-offices, the ability to enter/exit an end-office via any of several fingers, and the ability to select alternate routes, collectively provide substantial protection against disruption of an optical link or a set of links (either as a result of equipment failure, atmospheric impairment, or transient interruption of an optical beam due, perhaps, to a migrating bird!). It is envisioned that, as part of fault management, a diagnostic routine should be continuously executed which permits the base stations to rapidly sense disruption of an optical link and to initiate corrective action (alternate routing). Not only can the surviving optical links be used to communicate management and control commands during the restoration phase subsequent to link disruption but, if necessary, the radio interfaces can also be used to deliver

these fault management messages.

2.2 Conditions for Avoiding "Hot" Spots on the Mesh

One problem associated with the zoned approach just described in the previous section 2.1 is its loss of trunking efficiency; if the finger associated with a given zone is loaded to capacity (meaning that no additional virtual connections can be added without unacceptably degrading the QoS guarantees) even though adjacent fingers are underutilized, it is not possible (at least with fixed zones) to accept additional traffic generated within the zone associated with the fully loaded finger at another finger. Thus, virtual connections that might have been accepted by an underutilized finger will be blocked.

Consequently, it is useful to examine conditions under which better trunking efficiency might be realized. In fact, there exist some simple conditions under which a routing algorithm may ensure that the loading of all optical cross-links not leading directly to an end office (the "mesh links") is always less than the loading on an optical link that does lead directly (the "direct links" or "fingers") to an end office. In such a case, a simple Erlang blocking formulae can be applied, independent of the detailed traffic distribution among the picocells.

To begin, consider Figure 6 drawn for a rectangular mesh. Suppose that each direct link has a capacity of C_L virtual cells, and each picocell generates traffic of value $C \leq C_L$. (Alternatively, each picocell may terminate traffic of value $C \leq C_L$; it is readily shown that for either traffic inbound to an end office or outbound from an end office, each bi-directional mesh link is used in only one direction and, therefore, by symmetry, the Erlang blocking formulae are independently applicable for each direction.) Further, assume that each mesh link can carry traffic load of C_L . Let us define each base-station (which forms a picocell) to be a node. The nodes directly connected to an end-office are called "index nodes" (Figure 6). The unit distance between two adjacent nodes is called a "hop". Let us impose the constraint that a node can communicate only with its closest (in terms of the minimum number

of hops) end-office. Then, the rectangular mesh may be subdivided into "domains". A domain consists of an end-office and all the nodes communicating with it. A node may belong to more than one domain if it is equidistant to more than one end-office. The index node, geographically closest to the end-office it is associated with, is called the "primary index node".

Let us now consider Figure 7, in which there are exactly four direct links to the end-office, i.e., the maximum traffic intensity which can be handled by the end-office is $4C_L$. The traffic generated within the domain must be routed to the end-office in the domain. In each "quadrant" of the domain, concentric loops can be drawn as shown in Figure 7a. A "loop" connects nodes along the boundary of a rectangle. If, in any quadrant, the generated traffic is less than or equal to C_L , we can use those mesh links within the quadrant not associated with the mesh links comprising the loop to first route the traffic to the outermost loop in the quadrant. The direct link attached to this loop can then be used to route the traffic to the end-office. If, on the other hand, the traffic generated in a given quadrant exceeds C_L , i.e., is between C_L and $4C_L$, then traffic in excess of C_L can be redirected to neighboring quadrants using the mesh links between the quadrants (not shown in Figure 7). Note from Figure 7b that there will be at least four mesh links leading out of a quadrant and, hence, it is always possible to redirect excess traffic of up to $3C_L$ to the neighboring quadrants, thereby uniformly distributing the traffic among the quadrants. As long as no node generates more than C_L units of traffic, and as long as the total traffic is less than $4C_L$, then the only blocking encountered is due to the direct links being fully loaded. The call blocking probability can then be computed using the Erlang blocking formula given by

$$P_b(\rho, M) = \frac{\rho^M / M!}{\sum_{k=0}^M \frac{\rho^k}{k!}}$$

where the number of available circuits is M and the load is ρ .
In

the above case, if the load generated in the domain is ρ_D , the call blocking probability is given by $P^b(\rho_D, 4C_L)$.

5 Next impose the constraint that all traffic generated within a quadrant must reach the end-office by using only those direct links which lead into that quadrant (Figure 8). Furthermore, the route taken by any call is constrained to lie entirely within the quadrant. Let K be the number of direct links from the end-
10 office into a quadrant. It is essential that the value of K be less than or equal to 5 in order to avoid blockage on the mesh links (to be discussed later).

Now, consider a quadrant is of size $R \times R$. Let $N = [K/2]$, where $[x]$ is the closest integer greater than or equal x .
15 Suppose that $R \geq N$. In such a case, it is always possible to draw $M = [R/2]$ loops in the quadrant (sometimes a loop may consist of just a single node). Label the loops as shown in Figure 8a and 8b, with the innermost loop bearing the highest index number, that is, loop $i + 1$ would always lie within loop i . Mesh links which belong to a loop are called loop links, and
20 the mesh links interconnecting loops are called inter-loop links (See Figure 8b).

For this case, we can redistribute the calls by first routing all calls generated by nodes in the inner $M - N$ loops to
25 loop N using inter-loop links (note that these do not belong to any loop). Since the number of inter-loop links from loop $i+1$ to loop i is equal to 4 $(R-2i)$, it is possible to route all calls from the innermost $M - N$ loops onto loop N . Note that, when R is even, the maximum value of i is $(R/2) - 1$, and for this value
30 of i , the number of links out of the innermost loop is eight. If R is odd, then i is at most and the number of links out of the innermost loop will be four. However, since there is exactly one node in the innermost loop when R is odd, it is possible to route calls from the innermost $M - N$ loops to loop N .

35 As an example, in Figure 8b it is possible to route up to $4C_L$ calls (the maximum number which can be generated in loop 3)

from loop 3 to loop 2. Thus, at the conclusion of this process, all the traffic is concentrated on loops 1 through N (the outermost loops). Now, if $K \leq 4$, then the total traffic generated is less than or equal to $4C_L$. Since no traffic has as yet been flowed onto the inter-loop links interconnecting the outermost two loops, these links can now be used to uniformly distribute the traffic among these two loops. (Note that, for this process, no inter-loop link can be used which will subsequently be used to attach an inner loop to the direct link serving that loop. For example, referring to Figure 8a, inter-loop links a and b cannot be used to redistribute traffic among the loops since they will subsequently be used to attach loop 3, via node X, to node Y, which is an index node).

Furthermore, having accomplished this, neither loop carries traffic in excess of $2C_L$ (note that loops are bi-directional). If $K = 5$, the traffic intensity may be as great as $5C_L$ and, in such a case, using an identical procedure, one may uniformly distribute the traffic among loops 1, 2 and 3 (the outermost three loops).

Since it is possible to carry up to $2C_L$ calls on each loop (C_L in the clock-wise direction and the other C_L in the counter-clockwise direction), the entire traffic can successfully be routed to the corner node on the loop, closest to the end-office, without encountering blockage on the mesh links. The inter-loop links connected to this node lead directly to an index node (See Figures 8a and 8b). Thus, using these links, the traffic can now be routed to the end-office.

Note that it may be impossible to distribute traffic uniformly among the outer three loops if the total load generated is in excess of $5C_L$. This is illustrated in Figures 8c and 8d. Let all the traffic be generated by a cluster of nodes at a corner of the quadrant. If a maximum load of $5C_L$ is generated by a cluster of five nodes in a corner of the quadrant, then, since there are five mesh links leading out of this cluster, it will always possible to re-distribute the load (Figure 8c) among the outer three loops as described earlier. However, if a maximum load of, say, $6C_L$ is generated by a cluster of six nodes in a

corner of the quadrant as shown in Figure 8d, then its will be impossible to route this traffic to the end-office without blocking up to C_L calls since there are only five links (at least six links are necessary) leading out of the cluster. Thus, if the number of direct links, K , from the end-office into a quadrant is greater than five, given that the traffic within the quadrant is less than $K C_L$, one cannot guarantee that there will be no blockage on the mesh links. (Note that, this, in turn, implies that there may be up to 20 links total leading out of an end-office).

Now, suppose $R \leq N$. For this case, one may subdivide the quadrant into arcs as shown in Figure 8d (there are 4 arcs shown in Figure 8d). Note that the inner N arcs (an arc may consist of a single node, i.e., the primary index node) are connected to index nodes. It is readily apparent that all the traffic may be routed from the outer arcs to the inner N arcs, and redistributed among these N arcs (using the cross links between arcs), such that if an arc is connected to j index nodes, it carries a traffic of $j C_L$. The total traffic on an arc may then be routed to the end office through the index nodes on that arc. It is to be noted that, again, if $K > 5$, it may be impossible to deliver the traffic to the inner N arcs, due to conditions similar to those described in the previous paragraph.

Thus, we have shown that if the number of links leading directly to an end office, K , is less than or equal to five per quadrant, and are symmetrically arranged as shown in Figure 8a, then call blocking can be computed using the Erlang blocking formula. Let the traffic intensity generated in a quadrant be ρ_q . Referring to Equation (1), the probability that a call is blocked is then equal to $P_b(\rho_q, 5C_L)$.

If the number of direct links from the end-office into a quadrant is six (i.e., the total number of links leading out of the end office is now 24), one can eliminate blocking on mesh links by imposing the additional constraint that routes taken by calls generated within a semi-quadrant (See Figures 9a and 9b), in order to reach the end-office, must be constrained to lie entirely within the semi-quadrant. Adjacent diagonal nodes

belong to different semi-quadrants. Semi-loops may be drawn within a semi-quadrant as shown in Figure 9. Since the number of direct links is 6, at least 3 semi-loops can be drawn in a semi-quadrant (in the limiting case, a semi-loop may have just a column of nodes).

If the maximum traffic generated within a semi-quadrant is less than or equal to $3C_L$, it is possible to distribute the traffic among the three outermost semi-loops such that the traffic carried by any semi-loop is less than or equal to C_L . Note that if the traffic is greater than $3C_L$, blockage may be encountered on the mesh links. For example, let the traffic generated be $4C_L$. If all the traffic is generated in the cluster of four nodes at the corner of the semi-quadrant adjacent to the diagonal (Figure 9a) then, since there are only 3 links leading out of this cluster, C_L calls must be blocked. Thus, the maximum load which can be routed to the end-office without encountering blockage on mesh links within a semi-quadrant is $3C_L$. Referring to Equation (1), the probability of a call being blocked under such constraints is therefore $P_b(\rho_s, 3C_L)$, where ρ_s is the total traffic intensity generated in the semi-quadrant.

3. Cell Hand-Off

Routing in the optical mesh, as described in Section 2, assumes that, for its entire duration, a given virtual connection flows to/from the base station from which it was originally generated over a fixed set of optical links. In reality, since users are free to roam among radio cells, the virtual connections must be "handed off" among radio cells as a user "travels" among a sequence of cells. At the time of hand-off, it is required that (1) a new route be found leading from the newly-serving base station back to the end office, and (2) new routing instructions be provided to the switch contained in each base station along the new route. Implicit in the selection of a new route is the ability to maintain QoS over each link in the new route and within the radio cell accepting responsibility for the hand-off call. Insuring that QoS objectives are met can present a critical real-time processing challenge, especially when hand-

offs occur very frequently such as might be expected in a picocellular system. Delivering new routing instructions to the switches, after QoS has been ascertained, is a further challenge. Both challenges are adequately met by the virtual connection tree.

The basis of the virtual connection tree is the creation, at call set-up time, of a set of virtual connections for that call, each originating from a root node and each terminating in a different base station or leaf (actually two trees are set up: one leading to the root node, one leading from the root node, such that duplex connections can be handled). At call set-up time, an admission controller determines whether or not a new call can safely be admitted to the tree. For a new call to be admissible, it must be determined that on a statistical basis, and as a result of user mobility, the likelihood that too many calls will exist within a leaf of the tree, or flow on any given branch (link) of the tree, are acceptably low. If too many calls exist within a cell or flow on some given branch, then that cell or branch is said to be in overload, meaning that the QoS objectives cannot be met. Overload, then, either causes an unacceptable (but transient) degradation in service (i.e., delay or lost packet objectives are temporarily not met) or causes the call which caused overload to be dropped (as might occur, for example, for real time traffic such as voice). In essence, at call set-up time, the admission controller is making a guarantee: each new user can freely roam among all leaves (base stations) in the tree and, only occasionally (that is, with some guaranteed low probability) will unconstrained motion of the users cause an overload condition to arise. To maintain this guarantee, the admission controller blocks new call requests at some pre-determined threshold.

If a newly-requested virtual connection is admitted, a route in each direction will be chosen by that user.

As applied to our hybrid radio-optical link broadband access network, a connection tree might appear as shown in Figure 10a. Note that the root of the tree is an end-office, and branches of the tree extend to every base station served by that end-office.

- 40 -

Note further that, as shown in Figure 10a, the "fingers" leading to each end-office are "main branches" of the tree, that is, the tree is defined such that the zones of Section 3a are maintained and load-balancing among the fingers is provided for. Finally, note also that since each "leaf" can be reached through any of several "branches", it is possible to choose the "branches" for a newly-requested virtual connection such that (1) each base station is included in the tree and (2) load balancing is achieved among branches at a given distance from the root. Thus, when setting up a tree for a new call, each base station served by a given end-office would be included, but the path leading to each leaf would be chosen such that as users roam among cells, all branches at a given depth from the root node carry, on average, the same traffic intensity.

It is also possible to define the root of the tree as shown in Figure 10b, in which case an ATM switch behind the end-offices serves as the root node for some larger tree, the footprint of which includes the base stations served by several end offices. Also shown in Figure 10b is the inclusion of the base station of a standard cell as one leaf in the tree, so that a user can also choose service from a standard cell if conditions warrant (i.e., if the user has roamed to some vicinity not served by any picocell).

4. Optical and Radio Link Calculations

Discussion in this section demonstrates that, because of the relatively short range of adjacent lasercom transceiver nodes (100-200 meters) envisioned in the picocell network architecture of the present invention, a pico cell free-space optical link, hereinafter called the "lasercom link", can have all weather availability at OC-3 and higher data rates by use of an inexpensive, compact, low power, eyesafe transceiver. Estimates for the target capacity of the radio picocell are also provided.

The overall system performance of a lasercom link is easily quantified using a link budget, the techniques being similar to those used to evaluate microwave links. There are three important parameters, transmitter power, propagation losses, and

receiver sensitivity. The receiver sensitivity relates the amount of optical power needed to maintain the signal-to-noise ratio required to achieve a desired quality of service.

The received signal power can be calculated from:

$$P_R = P_T \eta \frac{A_R}{d^2 \delta^2} e^{-\alpha d}$$

5 where

	P_R	=	received power
	P_T	=	transmitted power
	η	=	optical efficiency
	A_R	=	area of receiving aperture
10	δ	=	angular divergence of the transmitted beam
	α	=	atmospheric attenuation factor, and
	d	=	distance between transmitter and receiver

15 For relatively clear air the exponential term is small and received laser power scales with $1/d^2$ and $1/\delta^2$; for propagation conditions of heavy attenuation, such as fog, it scales exponentially.

20 The amount of background radiation collected by the transceiver is dependent on the receiver's field of view and its optical bandwidth. The field of view cannot be made arbitrarily narrow due to alignment issues discussed below and the optical bandwidth cannot be made arbitrarily small due to poor absolute transmission through most narrow dielectric filters. The received background power, P_{Back} , is calculated from:

$$P_{Back} = \frac{0.2 \text{ watts}}{m^2 \cdot nm \cdot sr} \cdot A_R \cdot F_{BW} \cdot \delta_{FOV}^2 \cdot N$$

where

m = meters,
 nm = nanometers,
 sr = steradians
 5 F_{BW} = filter bandwidth, and
 δ^2_{FOV} = angular field-of-view

The value for irradiance of the sky was measured at 10 degrees from the sun using a specially calibrated telescope/detector assembly.

10 The noise equivalent power of the detector/preamp module can be calculated from a double-sided noise density usually expressed in watts/√Hz. Figure 11 shows the received signal power P_{rec} , background power P_{back} , and noise equivalent power P_{dark} as a function of range for the following set of parameters:

15	Telescope Diameter	10 cm
	Laser Power	20 mW
	Laser Divergence	2 mrad
	Telescope Efficiency	0.5
	Atmospheric Attenuation	Varies
20	Data Rate	OC-3 (155 Mb/sec)

In order to determine the availability of the link in all weather conditions, an attenuation of 392 dB/km, the worst (and very rarely experienced) fog was assumed in the calculation.

25 The Bit Error Rate (BER) for the PIN detector (a unity gain photodiode) circuit can be calculated using the previously obtained values. See S. G. Lambert and W. L. Casey, Laser Communications in Space, Artech House, Norwood, MA, 1995.

30 This circuit has an overall transimpedance gain of 10^6 . Figure 12 shows the calculated BER versus range for this case. The BER was calculated assuming equally likely ones and zeros and on-off keyed (OOK) modulation with direct detection. The threshold value was chosen at each range point with the criterion of minimizing BER at that point. Clearly the system is capable of very low (equivalent to fiber optic) BER at ranges of 100

meters or less in the most attenuating condition. For the avalanche photodiode detector, the range for a given BER is increased by approximately 15 meters.

Eye safety is always an issue when working with laser systems. The wavelength employed here is not inherently eyesafe (i.e., light can pass through the cornea to be imaged on the retina). ANZI standards Z131.1-1986 maintain that the maximum flux entering the eye at this wavelength is 2 mW/cm². See American National Standard for the Safe Use of Lasers, The Laser Institute of American, Orlando, FL, 1986. Transmit laser power of 20 mW implies a transmit aperture of 10 cm² minimum, a criterion easily met by our conceptual transceiver.

Path loss in an optical communications link is affected by atmospheric absorption, scattering, and turbulence, however, the magnitude of each loss mechanism varies greatly. Figure 13 shows sea level atmospheric transmission for a 350 meter path as a function of wavelength calculated using MODTRAN IV. Fortunately, for available semiconductor laser diode wavelengths of 810 nm, 1300 nm, and 1550 nm, path loss is negligible due to molecular absorption. See W. G. Driscoll and W. Vaughan, Handbook of Optics, McGraw-Hill, USA, 1978.

Path loss due to scattering is a function of optical radiation wavelength, number density and size of scatters in the path. In order to quantify the amount of scattering attenuation along a particular path, an approximation based on Mie scattering and visibility range can be used. See W. G. Driscoll and W. Vaughan, Handbook of Optics, McGraw-Hill, USA, 1978. The most severe path losses at near infra red wavelengths come about due to fog. Fog occurs when the relative humidity of an air particle approaches its saturation value. Some of the nuclei then condense into water droplets forming the fog. Figure 14 shows attenuation versus visual ranges up to one km. See W. K. Pratt, Laser Communications Systems, John Wiley & Sons, NY, 1969. Precipitation in the form of rain occurs when the water droplets condense up to millimeter sizes. This causes both scattering and water absorption losses along the path with the size distribution of the drops determining the relative magnitude of these effects.

The difference in fog and water droplet size, three orders of magnitude, accounts for the orders of magnitude difference in attenuation for typical rain (Figure 15) versus typical fog. Additionally, the relatively large size of typical raindrops compared with near infra red wavelengths, permits the drops to forward scatter a significant fraction of incident optical power. Attenuation due to snow has been measured by several groups and is displayed in Figure 16 for snow rates up to one foot per hour. Typically the path loss due to snow lies somewhere between fog and rain, however, the relationship is very complex and is best measured experimentally.

Path loss fading due to scintillation can be very significant (25-30dB) for long range paths through the atmosphere. Scintillation is caused by thermal fluctuations which induce random fluctuations in the index of refraction along the path contained in the beam's cross section. This causes the air to act like sets of small prisms and lenses which deflect the beam of light. In the plane of the receiver a speckle-like pattern appears with light and dark cells which have a characteristic size that scales like the square root of wavelength times path length. The generally accepted form for the probability distribution of the expected intensity is log normal for weak scintillations, however, this tends to saturate at variances near 0.35 for heavily scintillated paths. The log-normal distribution for the intensity and variance of intensity is given by:

$$P(I, \sigma_x^2) = \frac{1}{2I\sqrt{2\pi\sigma_x^2}} \exp \left[-\frac{(\ln I + 2\delta_x^2)^2}{8\delta_x^2} \right]$$

This is plotted in Figure 17 for the calculated variances along 100 meter and 1 km horizontal paths. For the 100 meter case of the pico cell backbone the effect is nearly zero and the

distribution of intensity is Gaussian. For the 1 km case the path is highly scintillated and a typical threshold detection scheme would require nearly 25 dB additional margin of transmitted signal power. Beam wander due to changes in index of refraction is about 0.1 microradians, negligible compared to the two milliradian beam divergence for the pico cell backbone system considered here.

A final issue to consider is misalignment of the transceivers to each other due to wind or thermal expansion causing an angular displacement of either end of the link. Figure 18 shows the calculated deflection of 10 inch diameter hollow poles made from steel, aluminum, and wood, applied wind pressure of 15 lbs. per square inch, considered hurricane force, and no allowance for aerodynamic flow. For steel and aluminum the deflection angle is not significant compared with 2 milliradians for pole lengths near forty feet. Since we envision much shorter poles, much smaller diameter pipe may be used. Thermal expansion of a three to four story building over temperature ranges of 50 degrees Celsius causes less than 50 microradians of angular displacement, a negligible effect for our case.

Given the previously discussed issues a potential conceptual design for a picocell backbone optical communications transceiver operating at OC-3 data rate (or higher), range of 100 meters or less, all weather operation, and BER of less than 10^{-9} is shown in Figure 19. Since the beam divergences used in this unit are over two orders of magnitude above the diffraction limit, extremely inexpensive plastic optics can be used throughout, and alignment tolerances become very forgiving permitting inexpensive manufacture. The aperture size is four inches making the unit relatively small, and could be made a factor of two smaller without affecting performance significantly. The smaller the transceiver can be made the easier and less expensive it is to build. Another benefit of small size and wide beam divergence is that relatively inexpensive acquisition and alignment systems can be used for potential autonomous alignment and alignment maintenance systems.

Turning now to the radio link, it is reasonable to assume an available spectrum of 10 MHz, equally split between tiers 1 and 2 (tier 3, created by Low Earth Orbiting (LEO) satellites, uses a different spectrum and will not be considered). In tier 1, since the cell diameter is so small, the path loss is low and we can safely consider the use of some higher-level digital modulation, say 16 QAM. Allowing a signaling rate of 1 symbol/sec/Hz, this translates to 20 Mb/s peak rate per picocell. We further envision the use of a smart array processor at the base station which, coupled with admission control, allows, on average, 10 Mb/s per picocell, that is, a peak rate of 20 Mb/s and an effective average frequency re-use factor of 50%.

For the standard cell, more array elements would be used to provide 100% frequency re-use, but the greater path loss limits the modulation to 4f-PSK, and both the peak and average rate within a standard cell are 10 Mb/s.

5. Summary

The present invention is embodied in a system and a method for a general-purpose wireless local access network. The use of very small radio cells with frequency re-use at the lowest tier insures very high bandwidth per subscriber. The use of a dense mesh of short, free-space optical links in a multi-hop arrangement allows signals to flow between picocellular base stations and an end-office, thereby eliminating any dependence on copper and/or optical cabling to the subscriber. Finally, the use of higher-tiered cells insures universal service availability (both from a radio coverage perspective and from a failure recovery perspective). The proposed system can equally well serve fixed-point, pedestrian, and vehicular users; all access is via a high capacity radio link, and handoff among cells is fully supported.

Although the use of free-space optical links might suggest a somewhat less-than-robust service availability, sample link calculations show that the shortness of the link provides excellent immunity against even extreme weather-related impairments. (For longer spans, millimeter-wave radio links may

be considered, but this might substantially escalate the cost of a subscriber's premises-based equipment.) Moreover, the richness of the optical mesh, the high data rate of each link, and the existence of higher-tiered radio cells combine to provide excellent immunity against outage caused by equipment failure. Routing in the mesh can be adapted to prevailing traffic conditions such that optical link bottlenecks as the traffic flows toward the head end are avoided, and the approach is compatible with embedded virtual connection trees to facilitate hand-off while maintaining QoS guarantees for each of several traffic classes (multimedia traffic). Exemplary capacity calculations suggest that 20 Mb/s peak rate, and 10 Mb/s average rate can be provided to each subscriber, and no optical link need operate at a rate exceeding 155 Mb/s.

In accordance with the preceding explanation, variations and adaptations of the telecommunications system and method in accordance with the present invention will suggest themselves to a practitioner of the wireless communication system arts.

For example, narrow band millimeter or microwave radio could be substituted, at a generally increased cost, for some or for all of the optical links of the system. A mesh communication network over a very wide area, or over very rugged terrain, might warrant such a selective substitution of directional millimeter or microwave radio for optical links. If some of the mesh communication links at a single base station are optical, and some are millimeter radio, then the base station is clearly a "hybrid". (Each and any link may be redundant, and may be continually operated redundantly or the communication modes may be substituted for each other depending upon conditions such as atmospheric interference.) If some mesh communication links are optical, and some are millimeter radio, then the system is clearly a "hybrid". These variations are not a problem, and are anticipated by the present invention. Indeed, if some mesh links, whether optical or millimeter radio, prove over time and actual use to be unreliable for certain base stations, then the links may well be substituted for by a link of another type.

Still another type of "hybrid" system is contemplated by

the present invention in that some of the mesh links may be, or may become, conventional copper cable and/or optical fiber. Consider the final links just short of an end office, which links were shown as lines radiating from each end office in Figure 6. If communications traffic, or evolving communications traffic dictates, any or all of these links can be made to be copper cable and/or optical fiber as may generally be made to carry greater communications traffic to an from a particular "sector" relative to the end office then, for example, a standard optical or millimeter radio link.

Still further, any individual one or ones of the base stations may bypass the free-space network altogether, and communicate direct to the end office via (i) radio, (ii) optics, or (iii) copper cable and/or optical fiber. This "hard-wired" base station may serve to communicate only such communications traffic as is associated with its own picocell, or it may continue to mount (in addition to its wire or fiber access) the system standard optical and/or millimeter radio transceivers, using these transceivers to siphon some communications traffic off the mesh and thus helping to ameliorate the communications burden at other base stations and other regions on the mesh. The "hard-wired" base station thus becomes a "constrictor", and just one more of several places where communications traffic can be interfaced to the mesh.

Herein lies a great flexibility in the system of the present invention. Clearly it has always been possible to add new base stations (as well as new telecommunicating equipments at existing base stations) to the mesh networks of the present invention as the area, and/or the areal density, of broadband wireless communications expands. The addition of new base stations can be accomplished, of course, without any new copper cables or fiber optics. However, should a new copper cable or a fiber optic be installed to some new or existing base station point in an existing mesh, then increased communications traffic can henceforth flow thru this point without disruption to the existing mesh and existing network.

In accordance with these and other possible variations

and adaptations of the present invention, the scope of the invention should be determined in accordance with the following claims, only, and not solely in accordance with that embodiment within which the invention has been taught.

- 50 -

CLAIMS

What is claimed is:

1. A telecommunications apparatus comprising:

a communications switch;

5 a first transceiver, electrically coupled to the communications switch, for wirelessly telecommunicating externally to the apparatus in a first portion of the electromagnetic spectrum;

10 a second transceiver, electrically coupled to the communications switch, for wirelessly telecommunicating externally to the apparatus in a second portion of the electromagnetic spectrum that is of higher frequency than is the first portion; and

15 a controller for causing the communications switch to first-route telecommunications traffic between the first transceiver and the second transceiver;

wherein wireless telecommunications are first-routed between a first and a second, higher frequency, portion of the electromagnetic spectrum.

20 2. The telecommunications apparatus according to claim 1 wherein the first transceiver comprises:

25 a radio transceiver electrically connected to the communications switch for wirelessly telecommunicating externally to the apparatus in the radio portion of the electromagnetic spectrum.

3. The telecommunications apparatus according to claim 2 wherein the second transceiver comprises:

a transceiver of free-space optical telecommunications signals electrically connected to the communications switch;

30 wherein wireless telecommunications are first-routed between radio and optical portions of the electromagnetic spectrum.

4. The telecommunications apparatus according to claim 2

- 51 -

wherein the second transceiver comprises:

a millimeter wavelength radio transceiver of millimeter wavelength telecommunications signals;

wherein wireless telecommunications are first-routed between a first radio portion of the electromagnetic spectrum and a second, millimeter wavelength, portion of the electromagnetic spectrum that is of higher frequency than is the first portion.

5. A telecommunications method comprising:

first-telecommunicating a local omnidirectional first-frequency first signal by use of an omnidirectional first-frequency first wireless transceiver;

second-telecommunicating a plurality of local directional second signals of a second frequency, higher than is the first frequency, by use of an associated plurality of directional second-frequency second wireless transceivers;

converting between (i) the first signal, as is telecommunicated with the first wireless transceiver, and (i) some particular one of a second signals, as is associated with a particular second wireless transceiver, in accordance with a protocol for telecommunicating along a chosen directional path; while

cross-communicating between the second transceivers so that all second signals directionally telecommunicated by use of any one of the second transceivers is further telecommunicated by use of another one of the second transceivers so as to advance further telecommunicate each second signal, as well as the converted first signal, along a chosen directional path in accordance with the protocol;

wherein, although both first-telecommunicating and second-telecommunicating are of local signals, the omnidirectional first-frequency first signal is immediately converted to a second-frequency directional second signal, and is then further directionally telecommunicated, while the directionally telecommunicated second-frequency signals are still further directionally telecommunicated, along the chosen directional path.

6. The telecommunications method according to claim 5 wherein the first-telecommunicating of the local omnidirectional first-frequency first signal by use of the omnidirectional first-frequency first wireless transceiver comprises;

5 first-telecommunicating a local omnidirectional radio signal by use of an omnidirectional radio wireless transceiver.

7. The telecommunications method according to claim 5 wherein the second-telecommunicating of the plurality of local directional second signals of the second frequency by use of the
10 associated plurality of directional second-frequency second wireless transceivers comprises:

second-telecommunicating a plurality of local directional free-space optical signals by use of the associated plurality of directional free-space optical transceivers.

8. The telecommunications method according to claim 5 wherein the second-telecommunicating of the plurality of local directional second signals of the second frequency by use of the
15 associated plurality of directional second-frequency second wireless transceivers comprises:

20 second-telecommunicating a plurality of local directional free-space millimeter-wavelength radio by use of the associated plurality of directional millimeter-wavelength radio transceivers.

9. A telecommunications apparatus comprising:

25 a communications switch;

a broadband radio first transceiver, electrically connected to the communications switch, for wirelessly telecommunicating omnidirectinally externally to the apparatus by broadband radio in a first, radio, portion of the
30 electromagnetic spectrum;

a second transceiver, electrically connected to the communications switch, for wirelessly telecommunicating directionally externally to the apparatus in a second portion of the electromagnetic spectrum; and

a controller for causing the communications switch to first-route telecommunications traffic between the broadband radio first transceiver and the second transceiver.

10. The telecommunications apparatus according to claim 9
5 wherein the second transceiver comprises:

an optical transceiver wirelessly directionally telecommunicating across free-space optical links.

11. A telecommunications method for and upon a communications mesh network of arrayed nodes, the method comprising:

10 wirelessly locally radio telecommunicating to a radio transceiver at each node by radio;

15 wirelessly locally directionally optically free-space telecommunicating between each of a plurality of optical transceivers, co-located with each other and with the radio transceiver at each node, by a plurality of directional free-space optical signals to a plurality of nearby nodes; and

20 first-routing, at each node, telecommunications to and from the radio transceiver and a selected one of the plurality of optical receivers that is so selected in accordance with a protocol for telecommunicating along a chosen path upon the mesh; while

25 second-routing, at each node, telecommunications received at one or more of the plurality of local directional optical transceivers to another one or ones of the plurality of local directional optical transceivers so to establish and maintain optical telecommunications along a path upon the mesh that is chosen in accordance with the protocol;

30 wherein, by the radio telecommunicating and the optical telecommunicating, and by the first-routing and the second-routing, telecommunications transpires (i) omnidirectionally at each node by radio, and (ii) directionally between nodes upon the path upon the mesh by optics.

12. The telecommunications method according to claim 11 wherein the wirelessly locally radio telecommunicating is

by broadband radio in a broadband radio transceiver.

13. The telecommunications method according to claim 11 wherein the wirelessly locally radio telecommunicating is in accordance with Asynchronous Transfer Mode protocol.

5 14. The telecommunications method according to claim 11 wherein the wirelessly locally optically free-space telecommunicating is in accordance with Asynchronous Transfer Mode protocol.

10 15. A telecommunications apparatus, called a base station, located within a multi-hop free-space optical telecommunications mesh consisting of a large number of identical base stations geographically dispersed, each base station of the mesh comprising:

a communications switch;

15 a first transceiver, electrically connected to the communications switch, for wirelessly telecommunicating locally externally to the base station;

a plurality of optical transceivers, electrically connected to the communications switch, for wirelessly directionally telecommunicating externally to the base station by an associated free-space directional optical link; and

20 a controller for causing the communications switch to route (i) telecommunications traffic telecommunicated with the first transceiver to one of the plurality of optical transceivers, and (ii) also optical telecommunications traffic received at one directional optical transceiver to another directional optical transceiver for further free-optical optical transmission, all to the consistent purpose and end that telecommunications traffic to and from the first transceiver
25 should be routed through a selected co-located directional optical transceiver and then through the further directional optical transceivers of whatsoever number of other base stations as are required until reaching a particular base station called
30 an end office;

wherein radio and free-space optical communications upon the mesh support telecommunications between, on the one hand, (i) a first transceiver of a base station and, on the other hand, (ii) a particular base station called the end office.

5 16. A communications system comprising:
an end-office having

a communications switch,

a hardwired connection between the switch and a communications backbone external to the system to which
10 communications backbone other end-offices also connect,

a plurality of optical transceivers, electrically connected to the communications switch, for telecommunicating externally to the end-office optically through free space, and

a controller for causing the communications switch to
15 route communications traffic between (i) the hardwired connection to the external communications backbone and (ii) the plurality of optical transceivers; and

a multi-hop mesh of radio-telecommunicating and optically-free-space-telecommunicating base stations each having

20 a communications switch,

a plurality of optical transceivers, electrically connected to the communications switch, for wirelessly telecommunicating externally to the base station by free-space optical links, and

25 a controller for causing the communications switch to route received optical communications traffic from a receiving to a transmitting optical transceiver to the purpose and the end that telecommunications traffic at any individual base station will be free-space optically communicated though whatsoever
30 number of base stations is required until telecommunicatively connecting to the end office and to the communications backbone;

wherein free-space optical communications upon the mesh are variably routed from one base station to another.

17. The communications system according to claim 16 wherein
35 the multi-hop mesh of optically-free-space-telecommunicating base

stations is further of base stations that are additionally radio-telecommunicating, and wherein each of these radio-telecommunicating and optically-free-space-telecommunicating base stations further has, in addition to its communications switch,
5 its plurality of optical transceivers, and its controller:

a radio transceiver, electrically connected to the communications switch, for wirelessly communicating by radio externally to the base stations;

wherein the controller is further causing the switch to
10 route communications traffic between the radio transceiver and the optical transceivers.

18. A communications system comprising:

an end-office having

a communications switch,

15 a hardwired connection between the switch and a communications backbone external to the system to which communications backbone other end-offices also connect,

a plurality of optical transceivers, electrically connected to the communications switch, for wirelessly
20 telecommunicating externally to the end-office optically through free space, and

a controller for causing the communications switch to route communications traffic between (i) its hardwired connection to the external communications backbone and (ii) the plurality
25 of optical transceivers; and

a multi-hop mesh of free-space optically-communicating base stations each having

a communications switch,

30 a radio transceiver, electrically connected to the communications switch, for wirelessly telecommunicating by radio locally externally to the base station,

a plurality of optical transceivers, electrically connected to the communications switch, for wirelessly communicating regionally externally to the base station by free-
35 space optical links, and

a controller for causing the communications switch (i)

to route telecommunications traffic between the radio transceiver and the optical transceivers, and (ii) to route received optical communications traffic from a receiving to a transmitting optical transceiver, to the purpose and the end that local telecommunications traffic at the radio transceiver is free-space optically communicated step-wise regionally through the optical transceivers of whatsoever number of base stations are required to and from the end office, and upon the communications backbone; wherein radio telecommunications local to one base station are free-space optically telecommunicated upon the mesh until ultimately communicatively interconnecting to the communications backbone.

19. A communications method comprising:

bi-directionally wire/cable-communicating information between a communications switch at a particular, end-office, site and a hardwired connection to a communications backbone which backbone is external to the end-office site and to which other end-office sites also connect;

end-office-wire/cable-switching the information between the end-office communications switch and a selected one of a plurality of wireless first transceivers, co-located at the end office with and electrically wire/cable connected to the communications switch, where the selected one of the plurality of wireless first transceivers at the end office is so selected in accordance with the information telecommunicated;

first wirelessly-telecommunicating the information through the selected one of the plurality of wireless first transceivers into free space, and onto a mesh of a multiplicity of free-space wireless communication transceivers;

further first wirelessly-telecommunicating the information upon successive links in free space upon the mesh, and through successive selected ones of the multiplicity of wireless first transceivers as are each located at a geographically separated mesh node, the successive selections of which ones of the wireless first transceivers are invoked for telecommunication upon the mesh, and the direction of the

telecommunication of the information upon the mesh, all being in accordance with the information, until a mesh telecommunications linkage is ultimately made with a wireless first transceiver at a particular selected, base station, mesh node;

5 base-station-wire/cable-switching, in a switch at the selected base station mesh node that wire/cable connected to the wireless first transceiver at this selected base station mesh node, the information between the wireless first transceiver at this selected base-station node and a wireless second transceiver
10 that is co-located at this selected base-station node along with the first transceiver; and

 second wirelessly-telecommunicating the information with and through the second transceiver to a telecommunicating device in the local geographical region of the selected base-station
15 node;

 wherein communications and telecommunications have transpired by, inter alia, wire/cable-communicating at the end-office, first wirelessly-telecommunicating over free-space mesh network links between the end-office and the selected base
20 station node, and second wirelessly-telecommunicating at the selected base station node to the telecommunicating device.

20. A hybrid telecommunications system where both
 (i) omnidirectional telecommunications, and
 (ii) directional telecommunications,

25 transpire upon at least some of a multiplicity of communications paths between a corresponding multiplicity of end-users and a cable-based communications backbone, the system CHARACTERIZED IN THAT

 each of the multiplicity of end-users telecommunicates,
30 via an omnidirectional telecommunications signal, with the system at a one of a plurality of system cells that are upon each of a plurality of hierarchical system cell levels, an end-user that proves unable to telecommunicate with the system through a system cell located at a lowest system cell hierarchical level
35 attempting to communicate with a system cell at a next higher system cell hierarchical level and so on until telecommunications

access to the system is finally obtained;

where IF omnidirectional telecommunications access to the system is successfully achieved at a system cell that is upon the lowest system cell hierarchical level THEN, starting from this particular lowest-hierarchical-level system cell where the telecommunications access has been so achieved, telecommunication then transpires by directional telecommunications signals directionally across directional telecommunications links organized as a mesh until a particular, end-office, system cell is reached which end-office cell is, nonetheless to being upon the lowest system cell hierarchical level, communicatively connected to a cable-based communications backbone, whereupon telecommunications with the end user that has been in part (i) omnidirectional, and in part (ii) directional, is summarily, at this end-office system cell, communicatively joined to the cable-based communications backbone; and

ELSE IF, upon such times as omnidirectional telecommunications access to the system is not achieved at the lowest system cell hierarchical level but is instead achieved only a higher system cell hierarchical level, THEN, system cells upon these higher hierarchical system cell levels being directly communicatively connected to the cable-based communications backbone, the telecommunications with the end user that has been omnidirectional, is summarily, and at this higher-hierarchical-level system cell, communicatively joined to the cable-based communications backbone;

wherein upon telecommunications upon at least some of the multiplicity of communications paths between the corresponding multiplicity of end-users and the cable-based communications backbone are (i) in part omnidirectional and (ii) in part directional.

21. The hybrid radio and optical telecommunication system according to claim 20 FURTHER CHARACTERIZED IN THAT

omnidirectional telecommunications are by radio, with an omnidirectional radio telecommunications signal.

22. The hybrid radio and optical telecommunication system according to claim 20 FURTHER CHARACTERIZED IN THAT directional telecommunications are optical, over directional free-space optical links.

5 23. The hybrid radio and optical telecommunication system according to claim 20 FURTHER CHARACTERIZED IN THAT directional telecommunications are by millimeter wavelength radio, over directional millimeter wavelength radio links.

10 24. A hybrid telecommunications system where both
(i) radio telecommunications, and
(ii) free-space optical telecommunications,
transpire upon at least some of a multiplicity of communications
paths between a corresponding multiplicity of end-users and a
15 cable-based communications backbone, the system CHARACTERIZED IN
THAT

each of the multiplicity of end-users telecommunicates,
via a radio telecommunications signal, with the system at a one
of a plurality of system cells that is upon each of a plurality
20 of hierarchical system cell levels, an end-user that proves
unable to telecommunicate with the system through a system cell
at a lowest system cell hierarchical level attempting to
communicate with a system cell at a next higher system cell
hierarchical level and so on until radio telecommunications
25 access to the system is finally obtained;

where, upon such times as radio telecommunications access
to the system is successfully achieved at the lowest system cell
hierarchical level, then, starting from a particular lowest-
hierarchical-level system cell where this telecommunications
30 access is so achieved, telecommunication then transpires across
free-space optical links organized as a mesh until a particular,
end-office, system cell is reached which end-office cell is,
nonetheless to being upon the lowest hierarchical system cell
level, communicatively connected to a cable-based communications
35 backbone, whereupon the telecommunications with the end user that

have been (i) in part by radio, and (ii) in part by free-space optical, are summarily, and at this end-office system cell, communicatively joined to the cable-based communications backbone; and

5 where, upon such times as radio telecommunications access to the system is not achieved at the lowest system cell hierarchical level but is instead achieved only a higher system cell hierarchical level, then, system cells upon these higher hierarchical system cell levels being directly communicatively
10 connected to the cable-based communications backbone, the telecommunications with the end user that has transpired by radio, is summarily, and at this higher-hierarchical-level system cell, communicatively joined to the cable-based communications backbone;

15 wherein upon at least some of the multiplicity of communications paths between the corresponding multiplicity of end-users and the cable-based communications backbone telecommunications are (i) in part by radio and (ii) in part by free-space optical links.

20 25. A broadband free-space network access system for providing broadband telecommunications services to stationary and mobile user devices comprising:

 multiple sets of plural geographically-localized uniquely-identified first-tier telecommunication stations called
25 base stations,

 each base station bi-directionally wirelessly telecommunicating by a broadband free-space first signal with a plurality of user devices within a small-size area geographically local to the base station,

30 each set of plural base stations providing in combination broadband free-space wireless telecommunications to most, but not necessarily all, of the user devices that are within a medium-size geographical area that includes the small-size geographical areas local to each base station of the set;

35 a free-space broadband communications network for communicatively interconnecting, by free-space second signals

that are of different frequency than are the first signals, the multiple sets of plural geographically-localized uniquely-identified first-tier telecommunication base stations to a communications backbone; and

5 a multiplicity of second-tier stations each within a medium-size geographical area, each second-tier station

bi-directionally wirelessly telecommunicating again by the broadband free-space first signal with any user devices within the medium-size geographical area which user devices are
10 not otherwise telecommunicating with first-tier telecommunication base stations, and

communicatively interconnecting these user devices to the communications backbone;

wherein any individual user device can, and most commonly
15 does, wirelessly telecommunicate through a first-tier telecommunications base station within a small geographical area local to the device in order to, after communicating further across the free-space broadband communications network, communicatively interconnect with the communications backbone;
20 but

wherein any individual user device can alternatively wirelessly telecommunicate within the medium-size geographical area through a second-tier telecommunications station in order to communicatively interconnect with the same communications
25 backbone.

26. The broadband radio network access system according to claim 25

wherein the collective base stations of each of the multiple sets of plural geographically-localized first-tier
30 telecommunications base stations collectively provide radio telecommunications to the majority of the user devices that are within a medium-size geographical area including the small-size geographical areas that are local to each base stations of the set;

35 wherein most of the radio telecommunications in each medium-sized geographical area is through the first tier base

stations, rather than through the second-tier station.

27. A communications system comprising:

a mesh network telecommunicatively interconnecting a multiplicity of communication switches by and upon free-space telecommunications links; and

means for establishing virtual communication paths upon the mesh network between ones of the multiplicity of communication switches.

28. The communications system according to claim 27

wherein the mesh network is telecommunicatively interconnecting the multiplicity of communication switches by and upon free-space optical telecommunications links.

29. The communications system according to claim 27

wherein the mesh network is telecommunicatively interconnecting the multiplicity of communication switches by and upon free-space millimeter wavelength radio telecommunications links.

30. The communications system according to claim 27

wherein the means for establishing virtual communication paths upon the mesh network between ones of the multiplicity of communication switches is so establishing the virtual communications links in form of a tree, the virtual communication paths from the multiplicity of communication switches focusing to a root node communication switch called an end office.

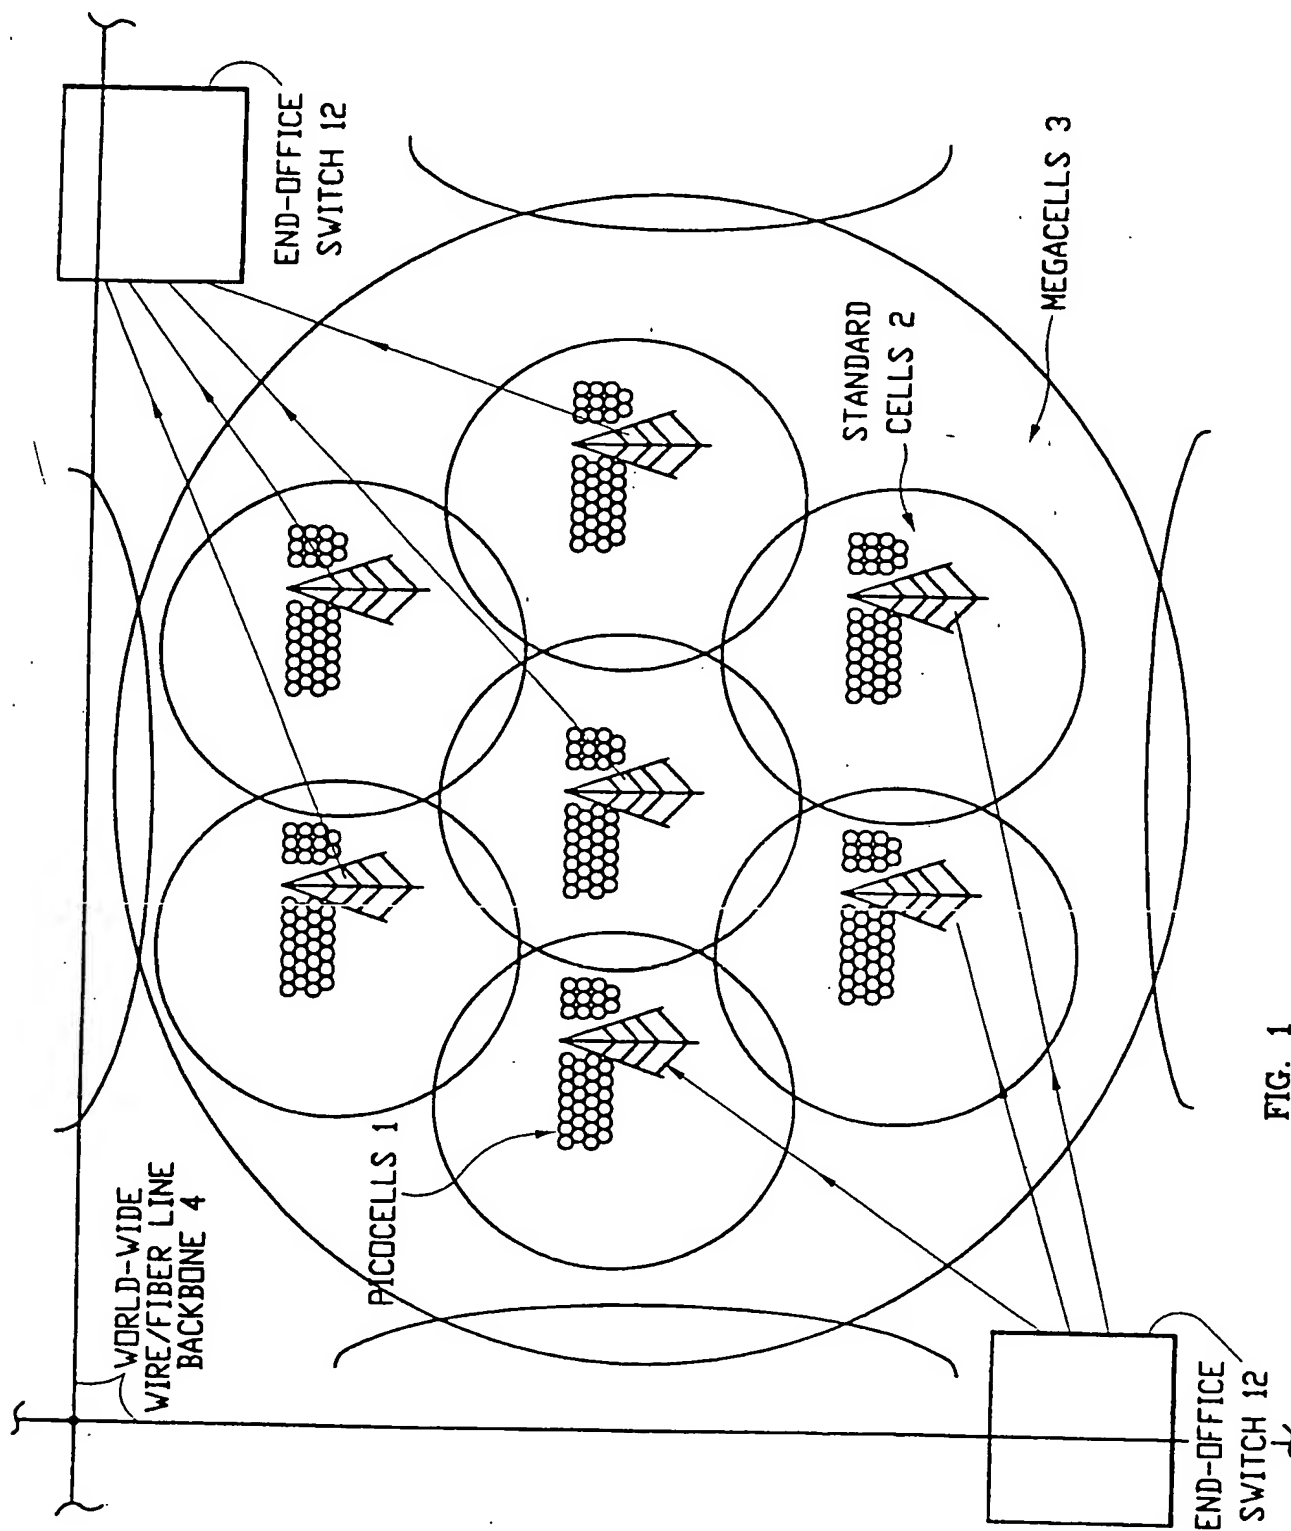


FIG. 1





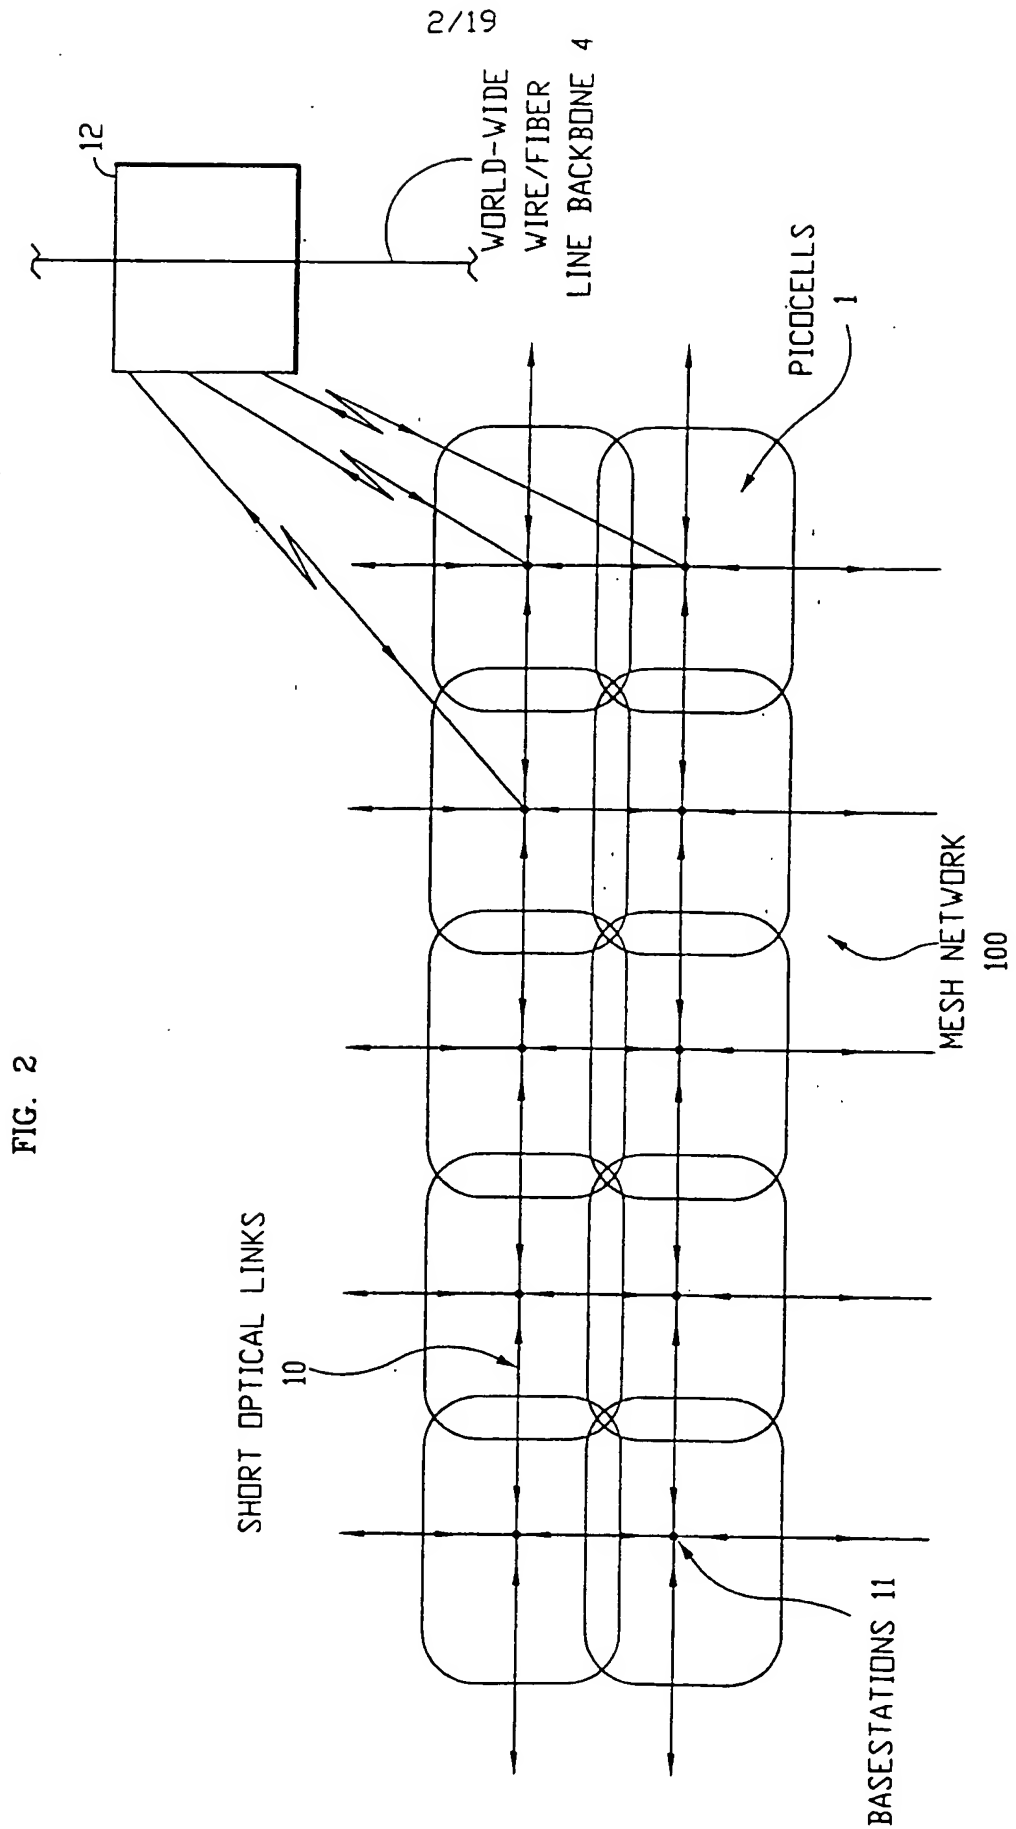


FIG. 2

3/19

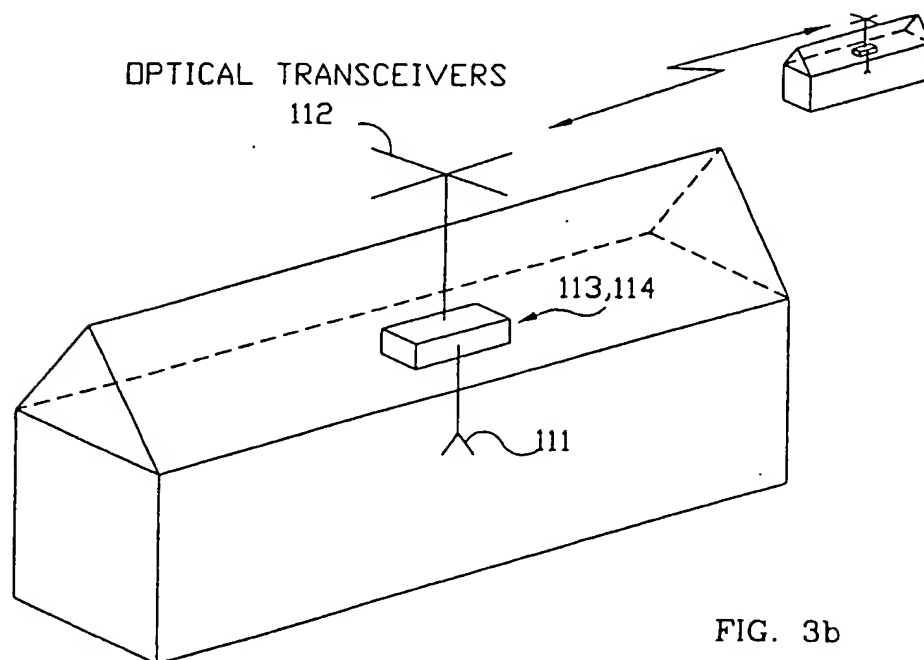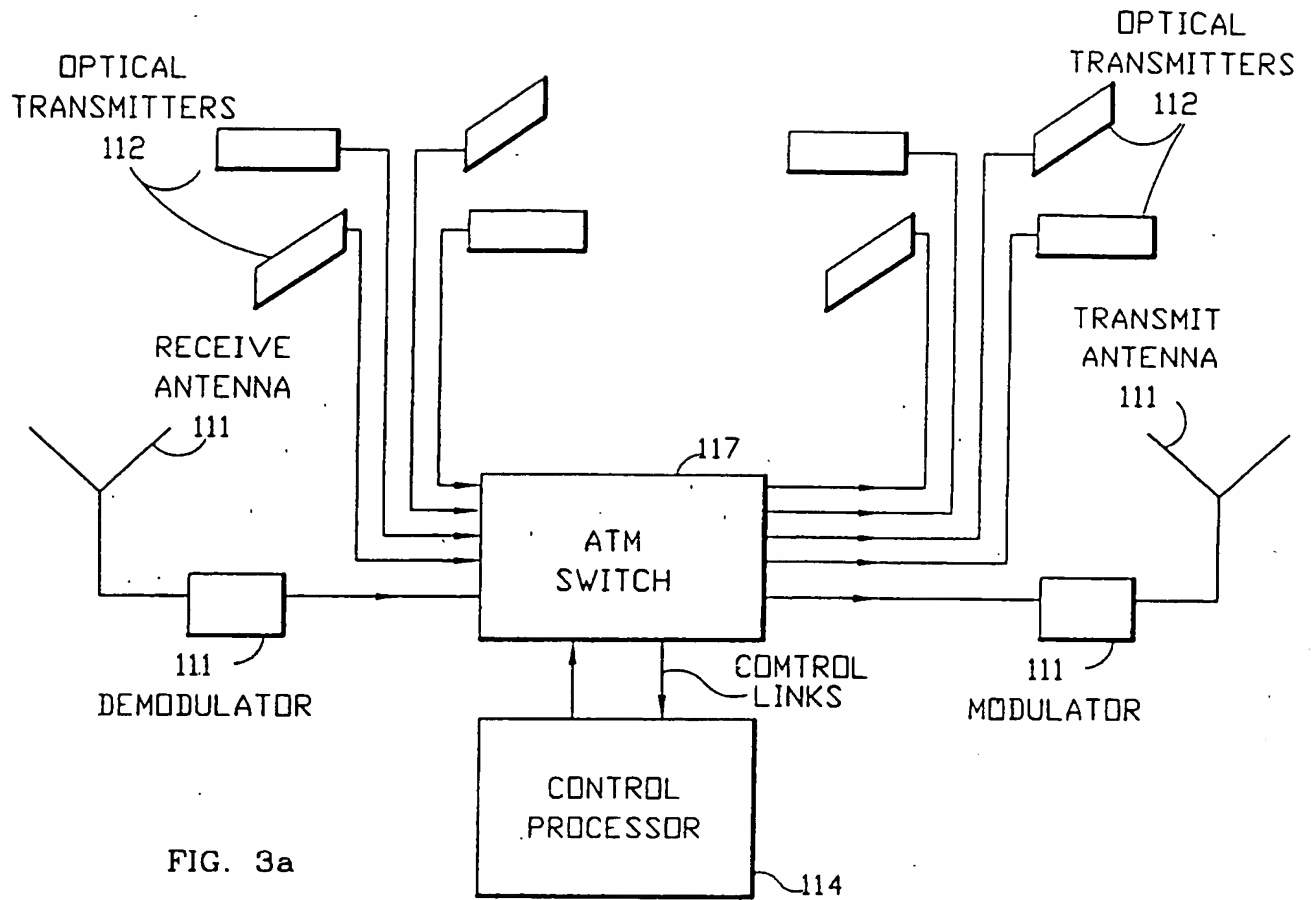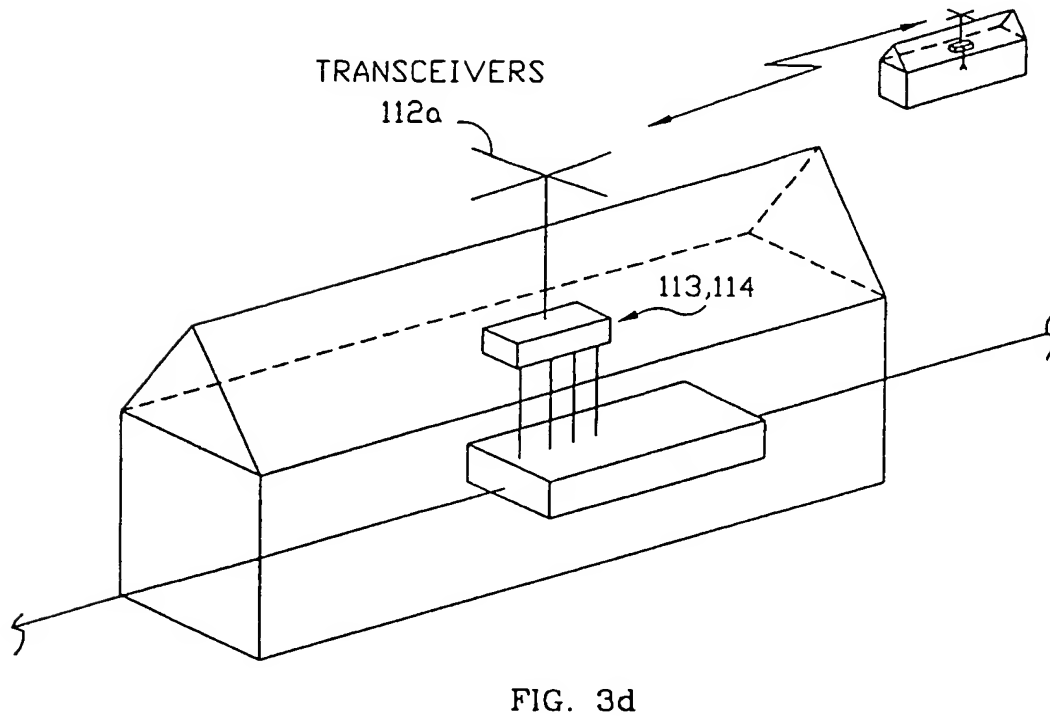

4/19

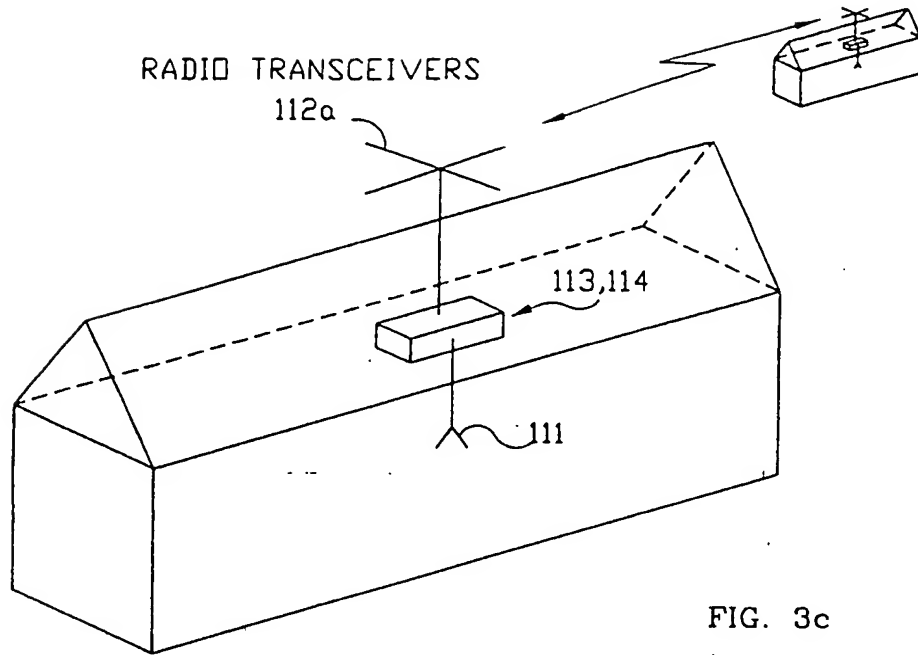

5/19

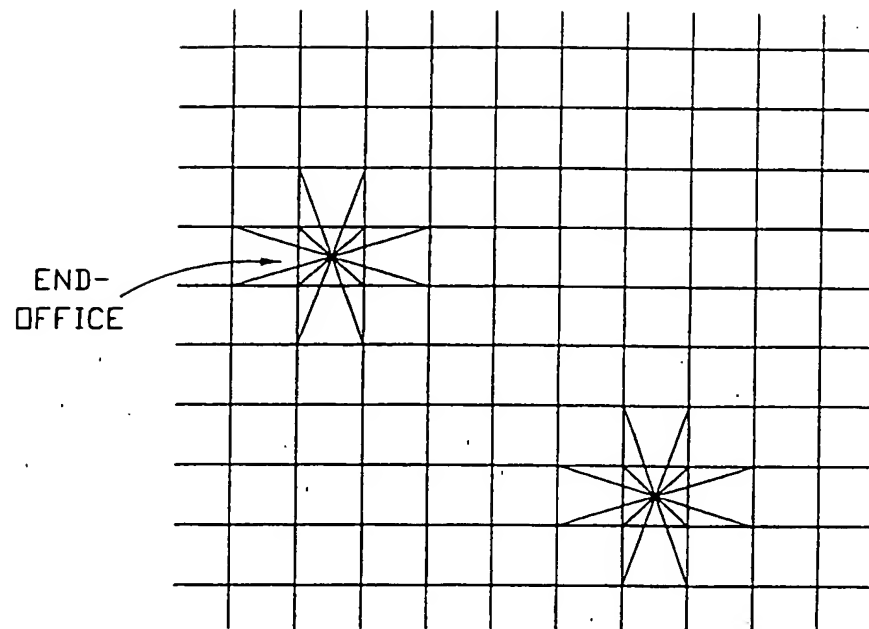


FIG. 4


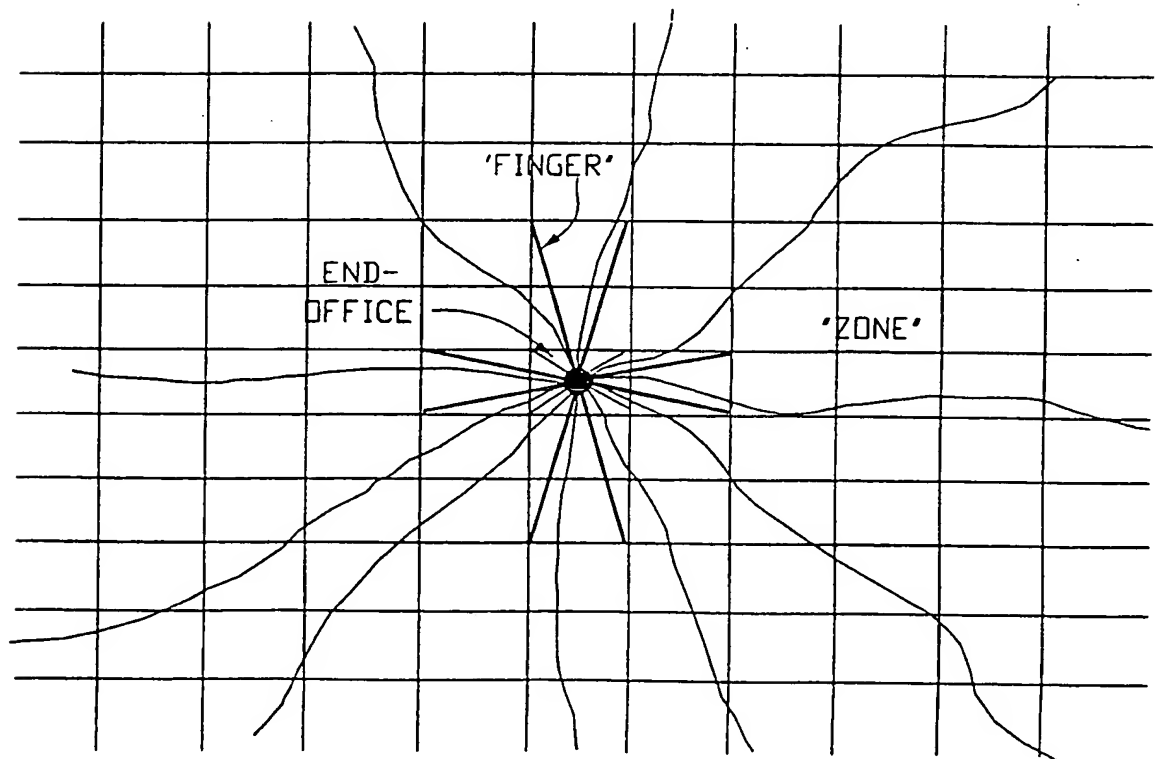


FIG. 5

6/19

FIG. 6

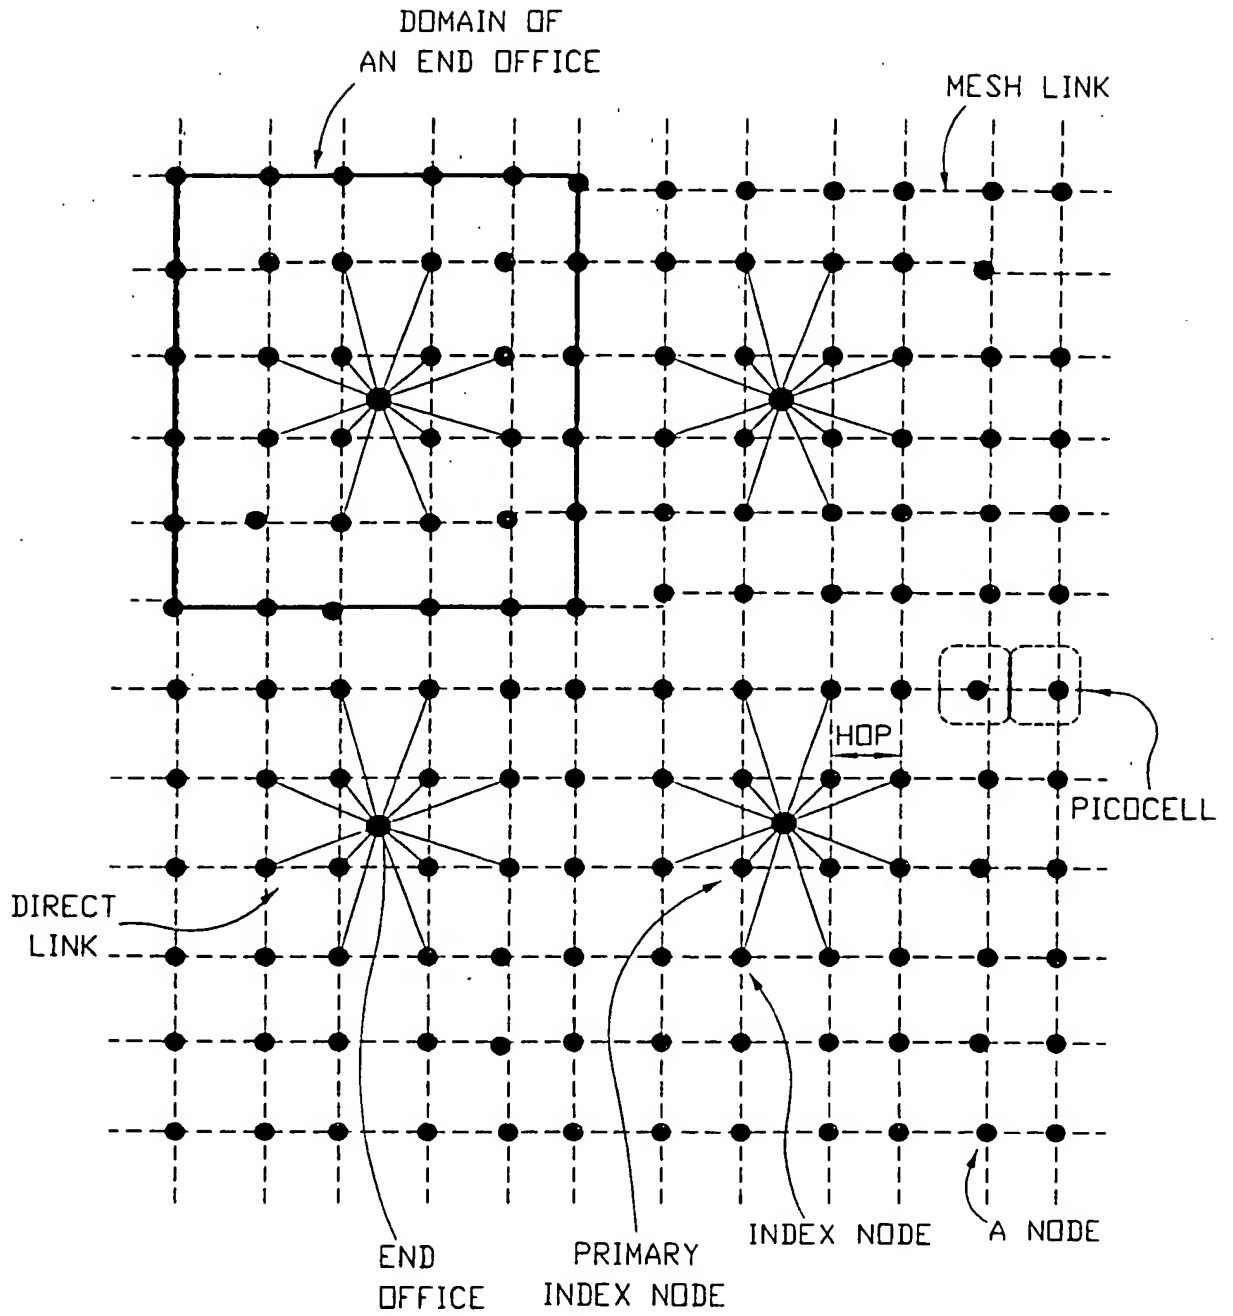

7/19

FIG. 7a

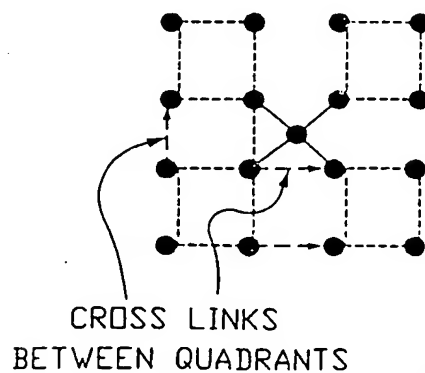
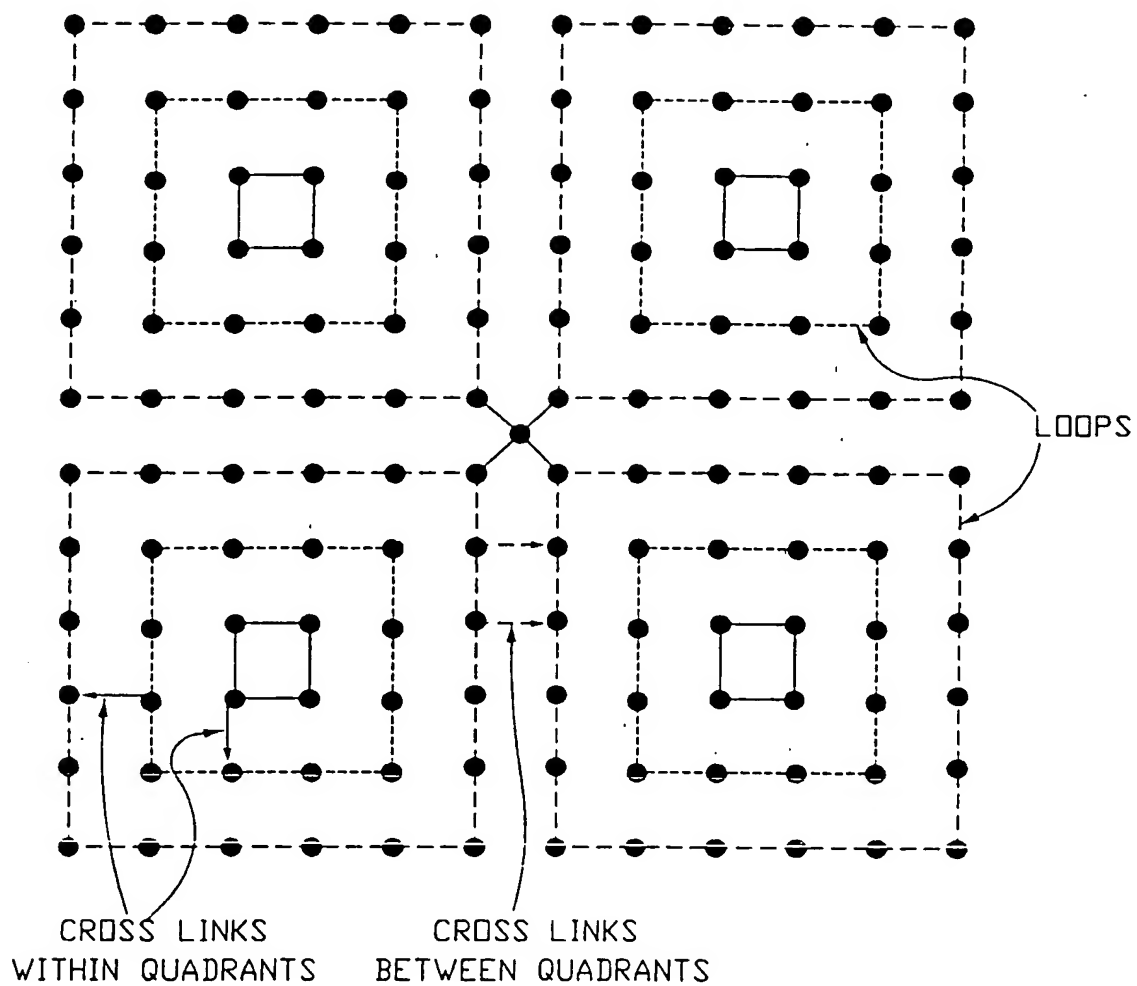


FIG. 7b

8/19

FIG. 8a

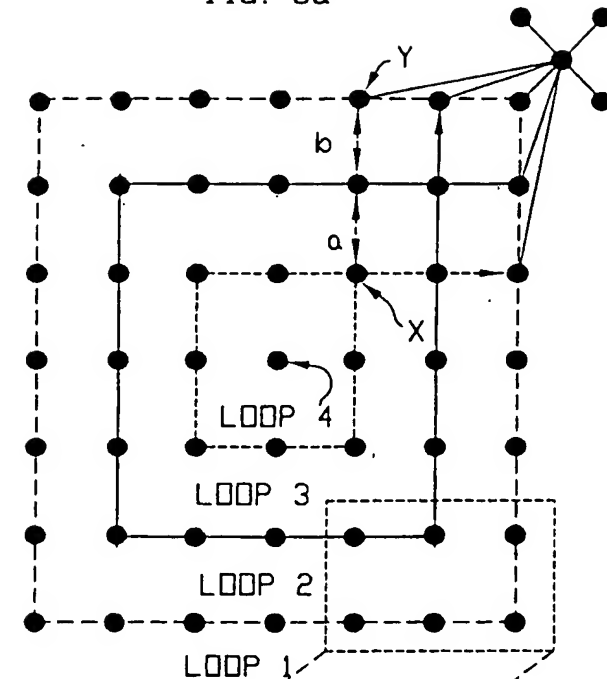


FIG. 8b

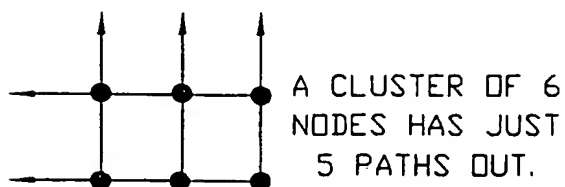
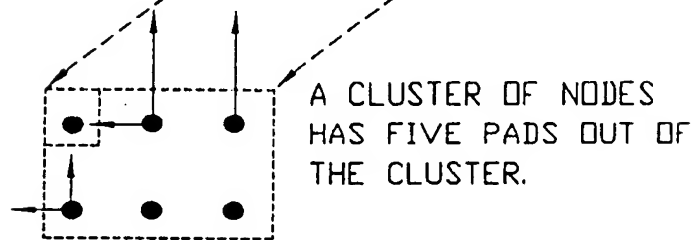
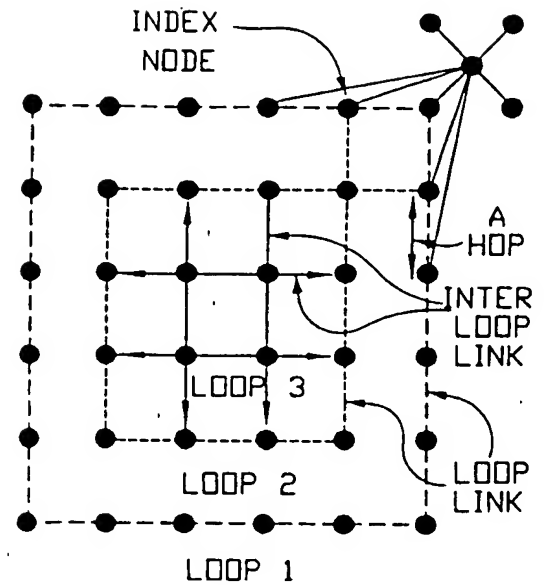


FIG. 8c

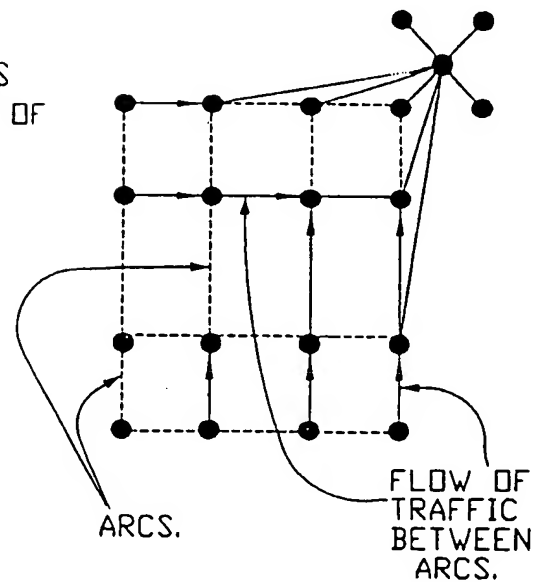


FIG. 8d

9/19

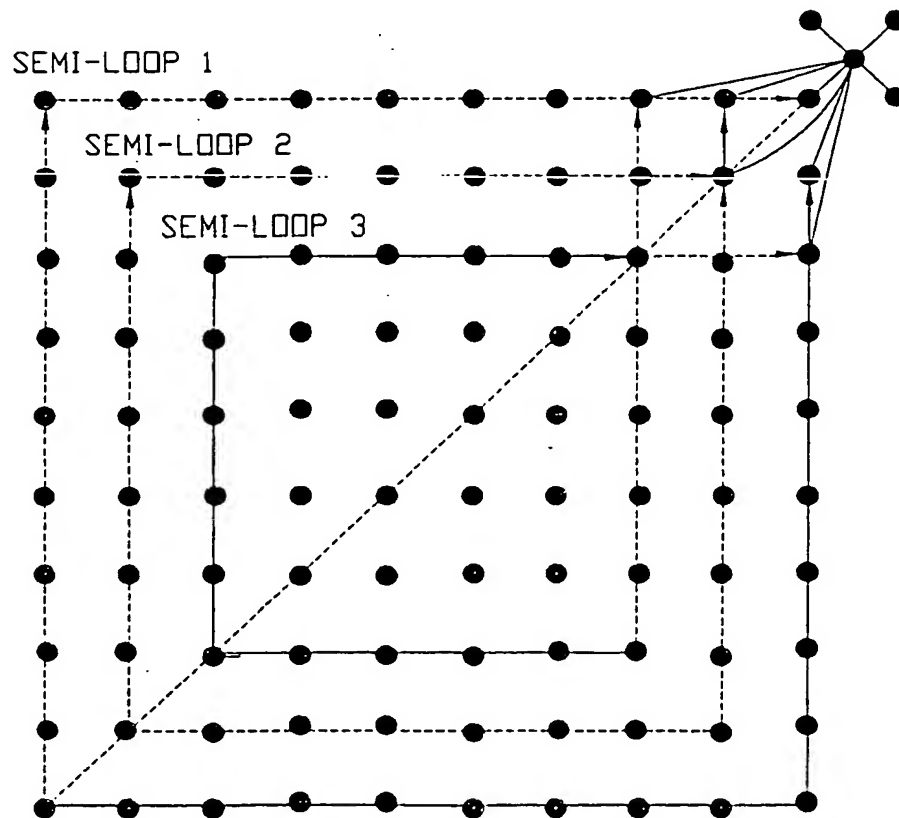
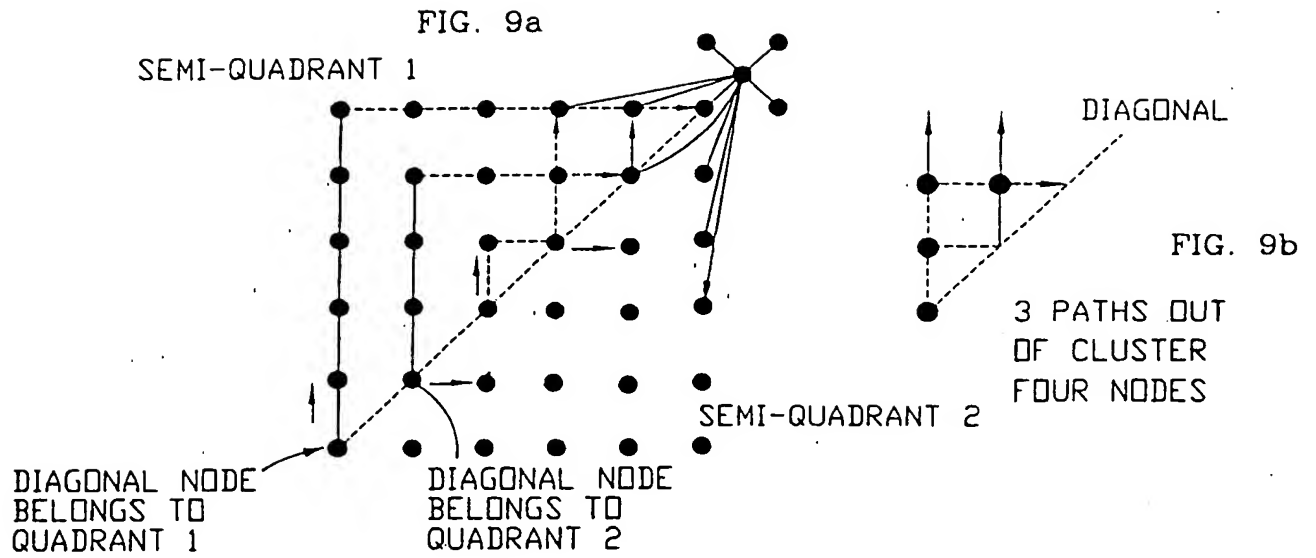


FIG. 9c

10/19

FIG. 10a



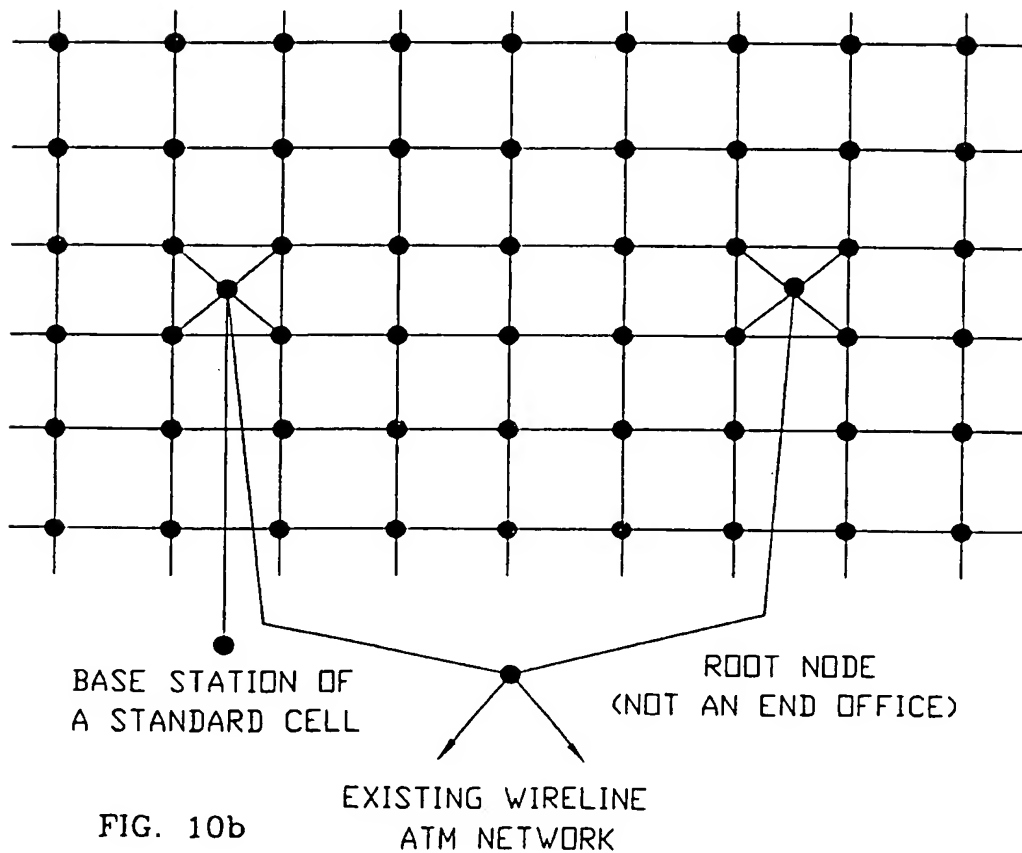


FIG. 10b


11/19

FIG. 11

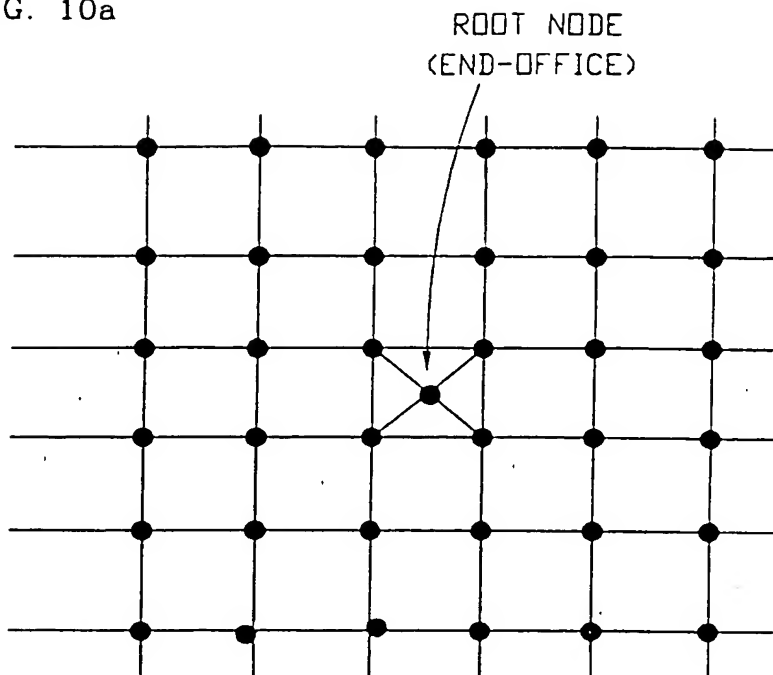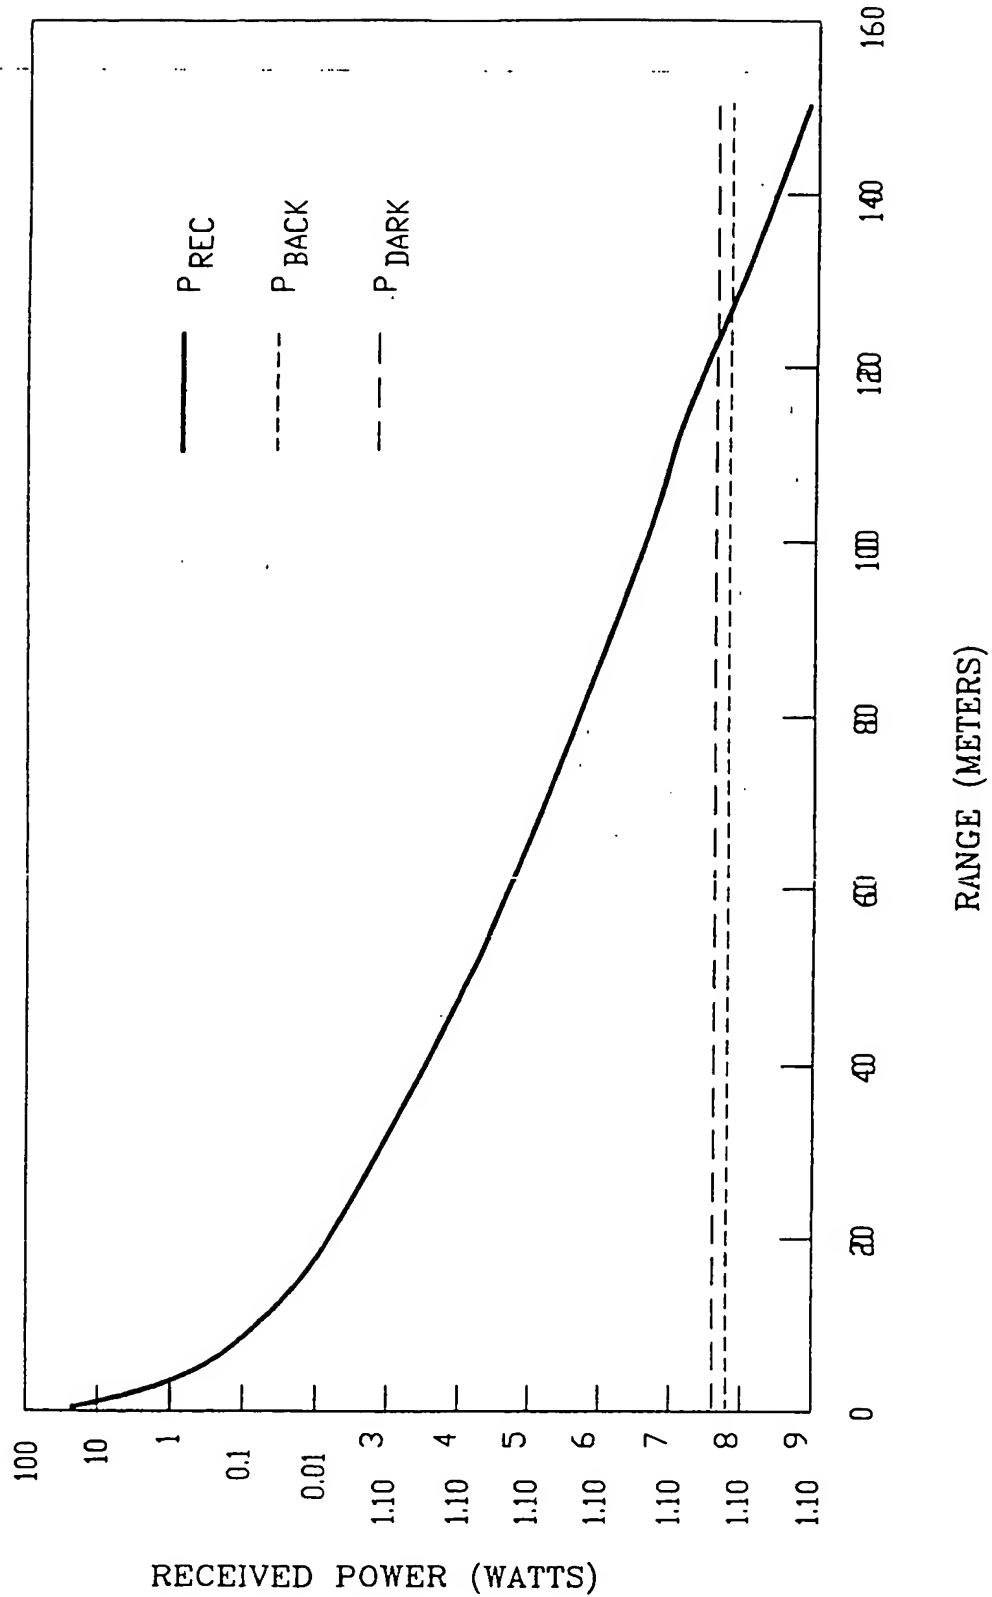

12/19

FIG. 12

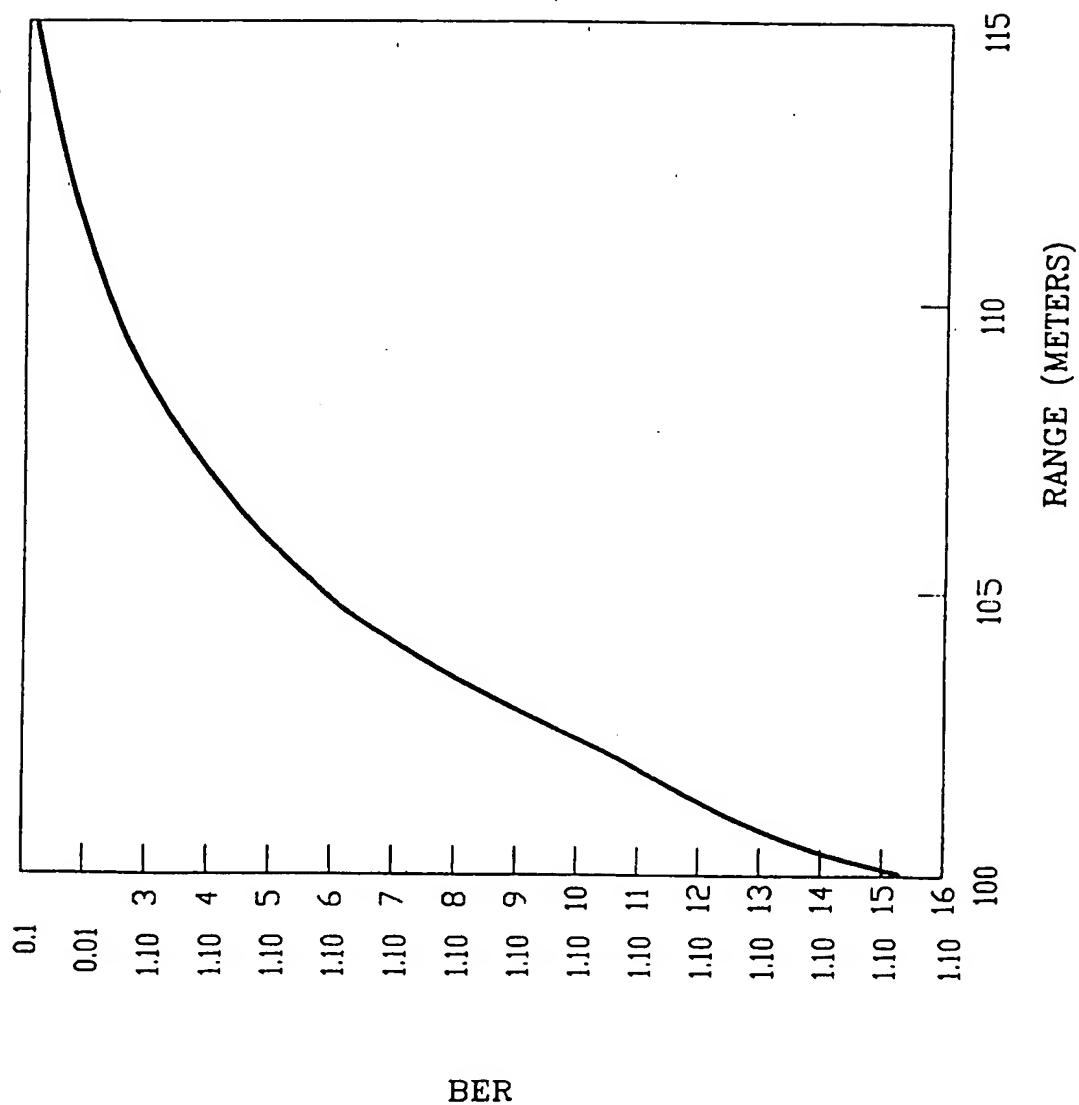

13/19

FIG. 13

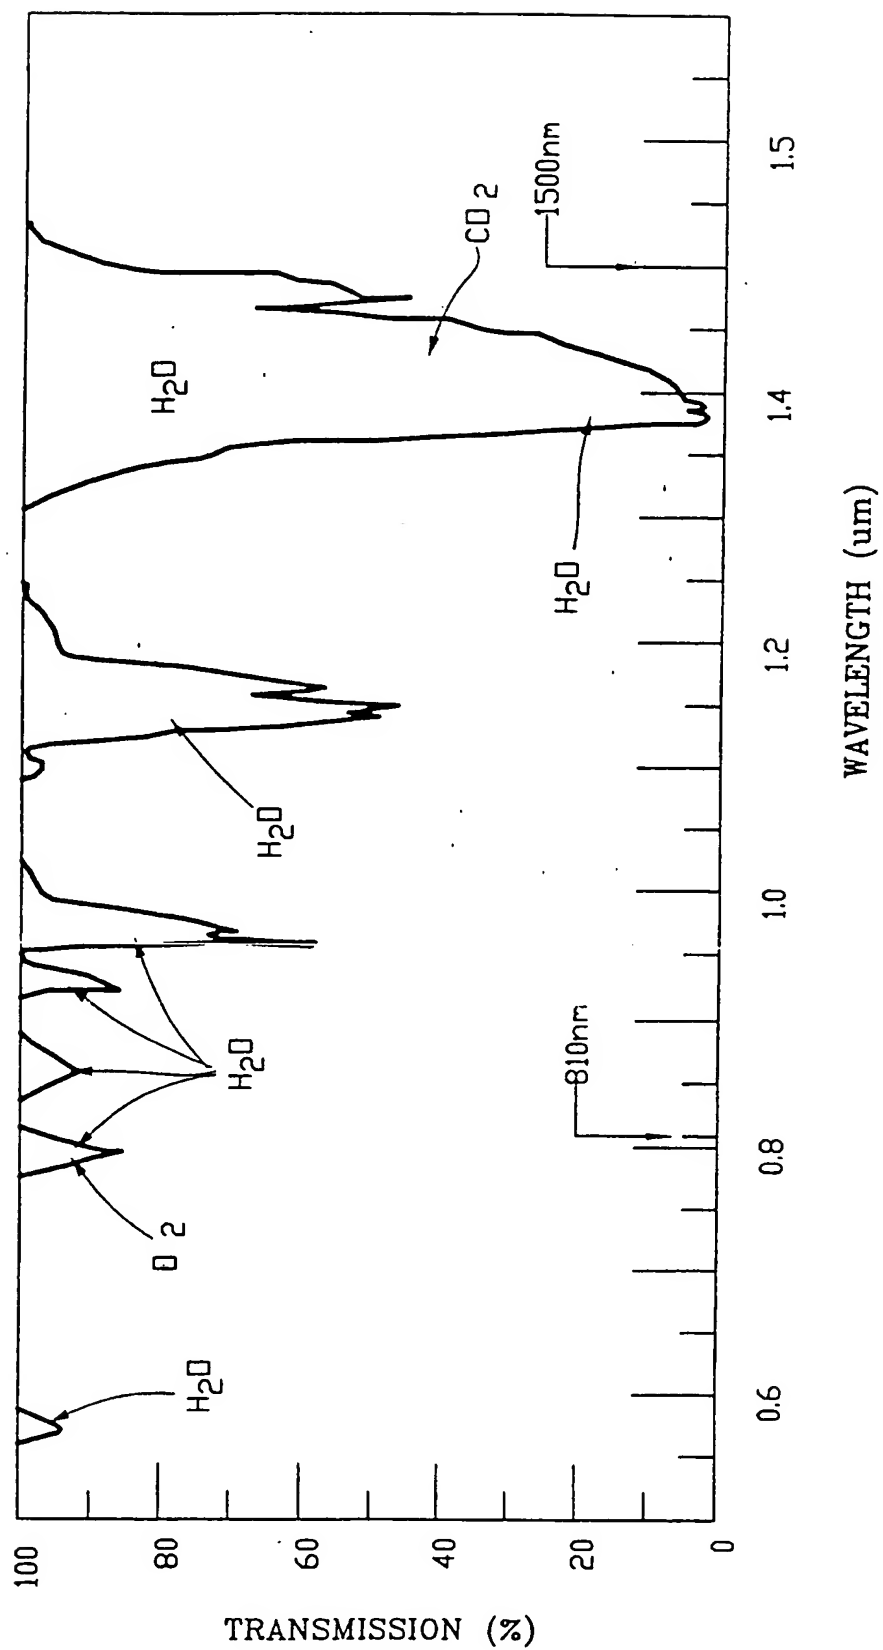


FIG. 14

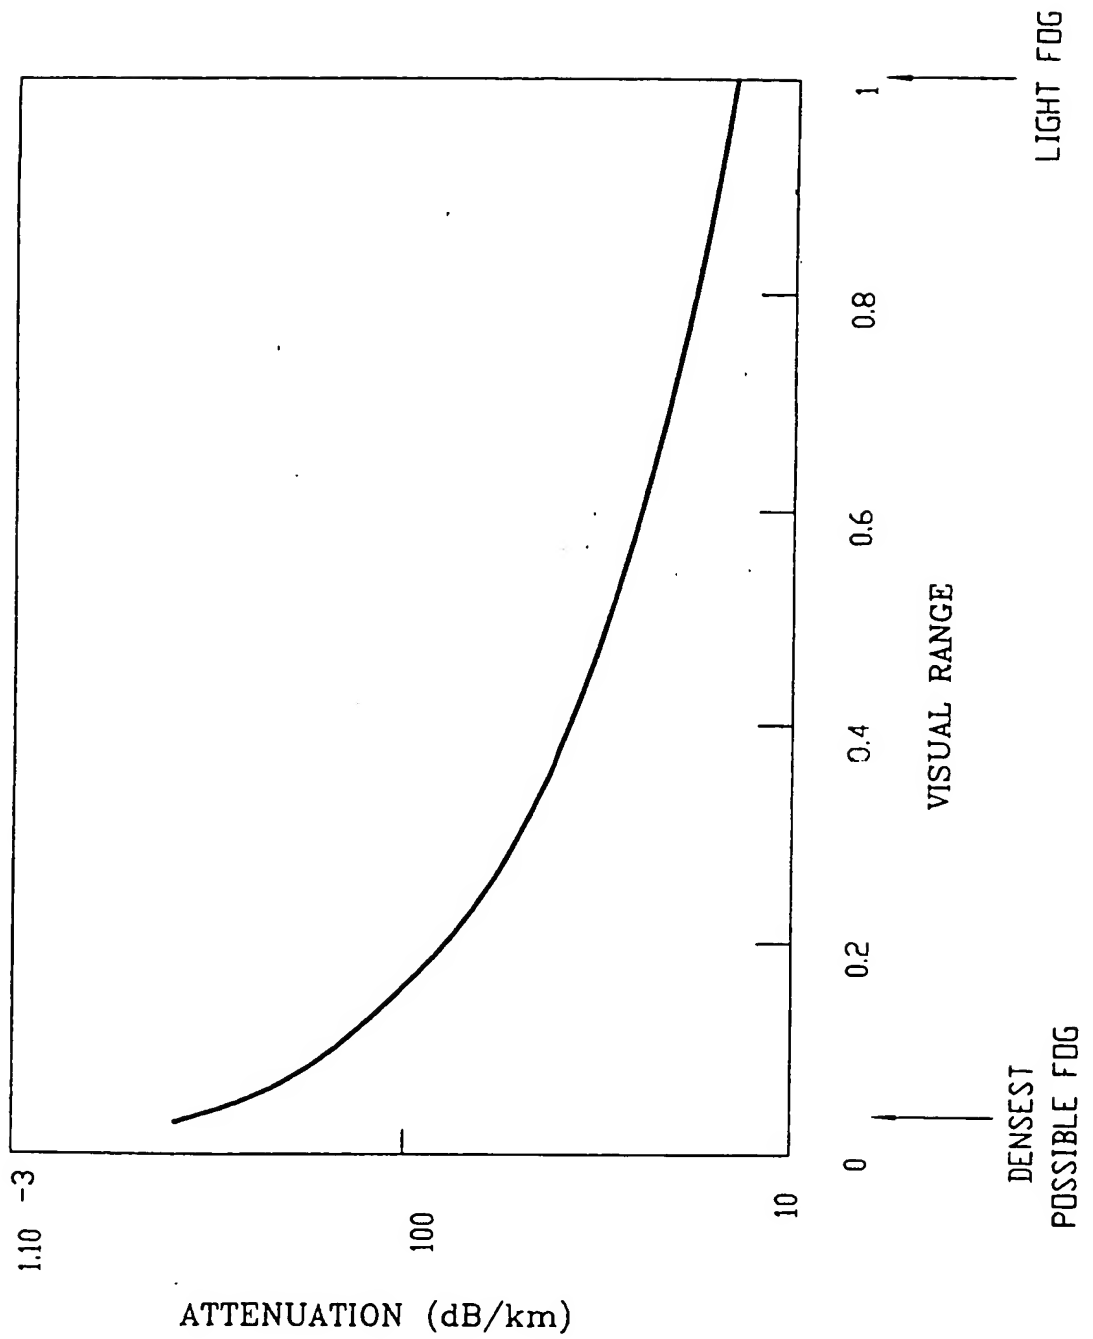


FIG. 15

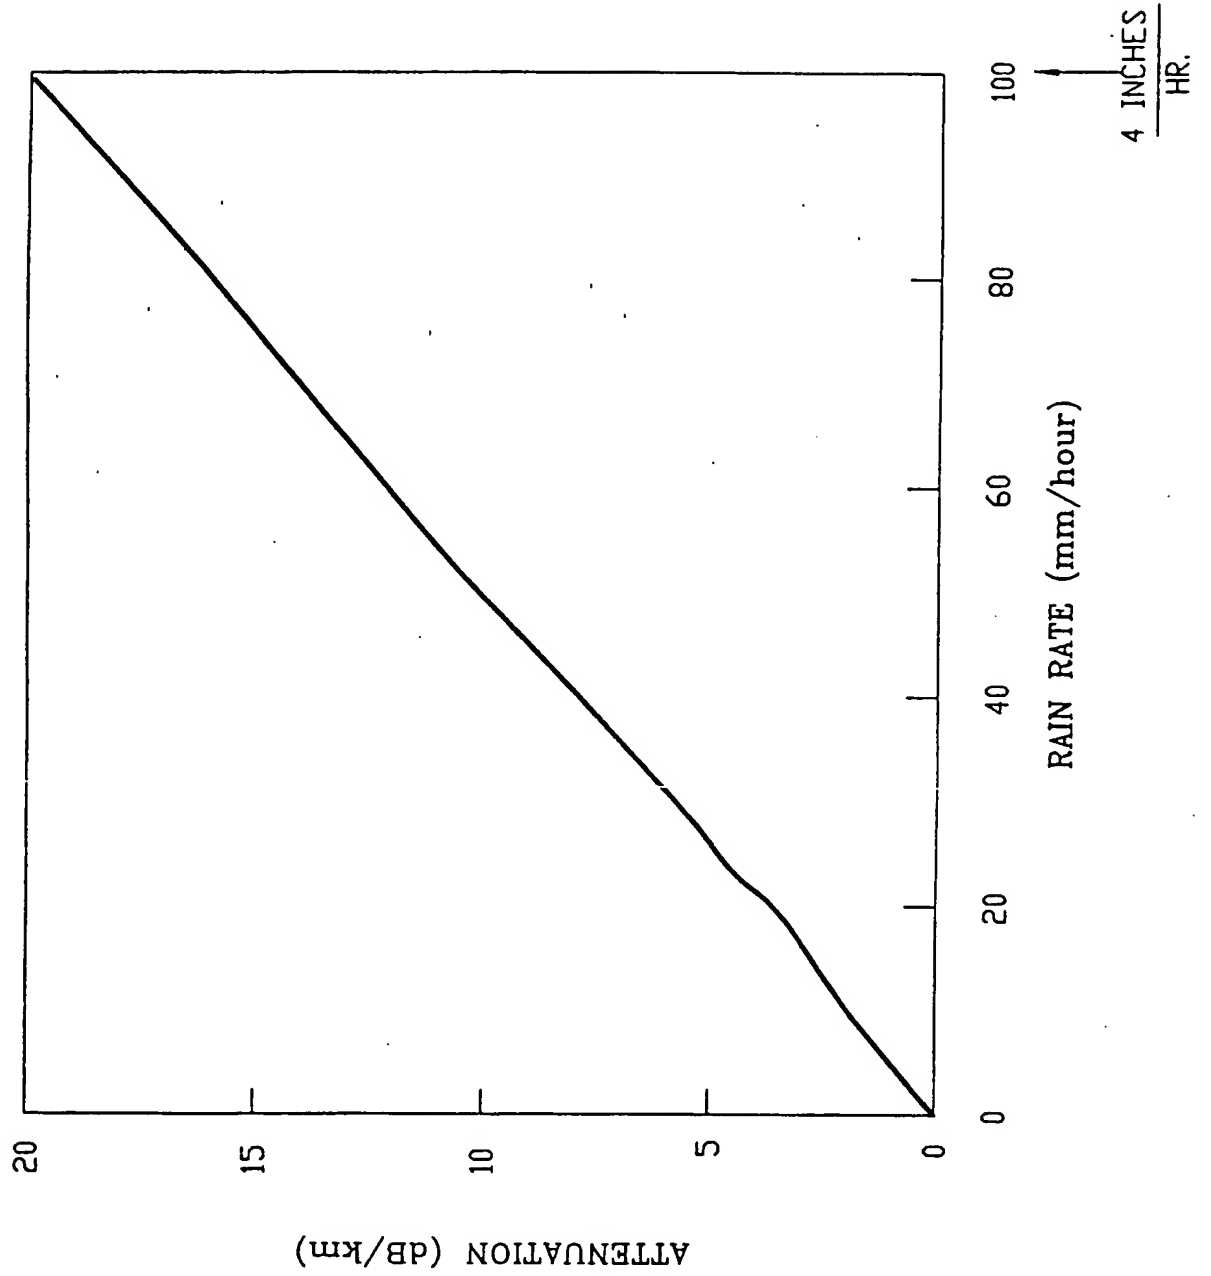


FIG. 16

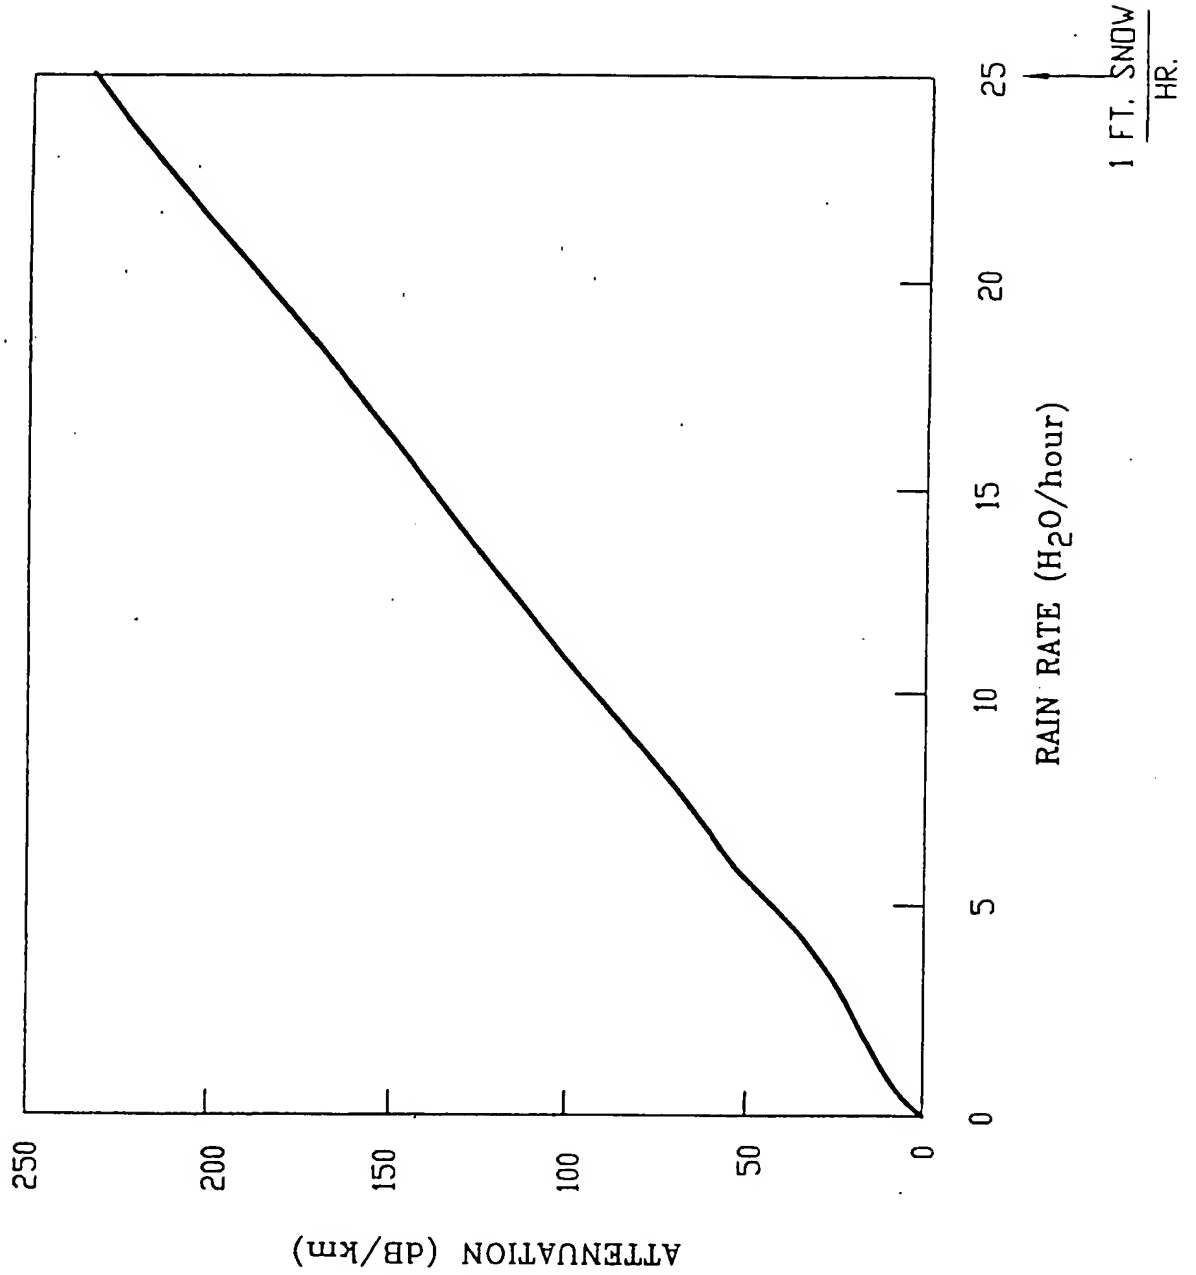
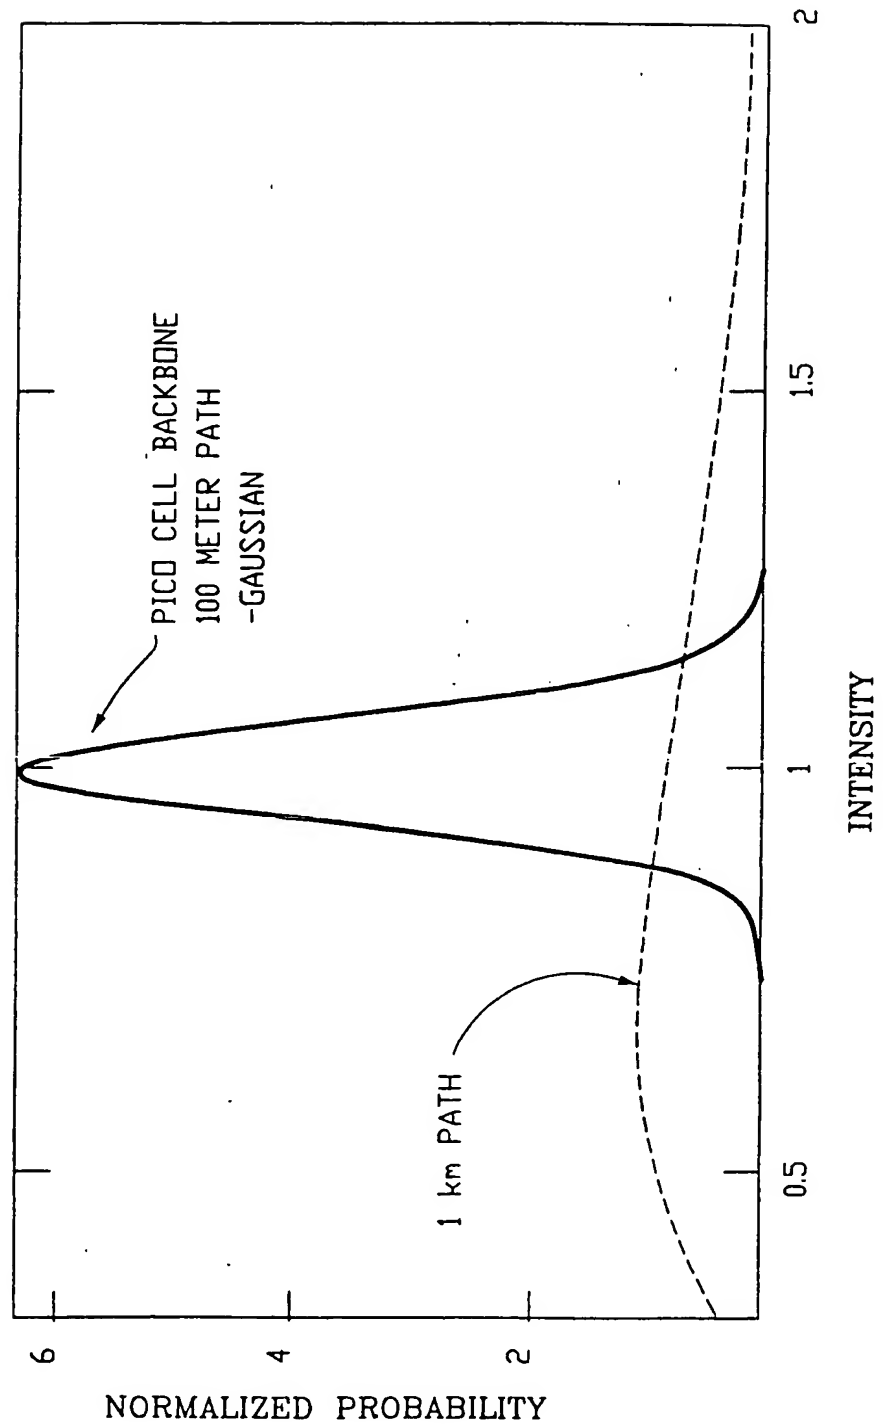


FIG. 17




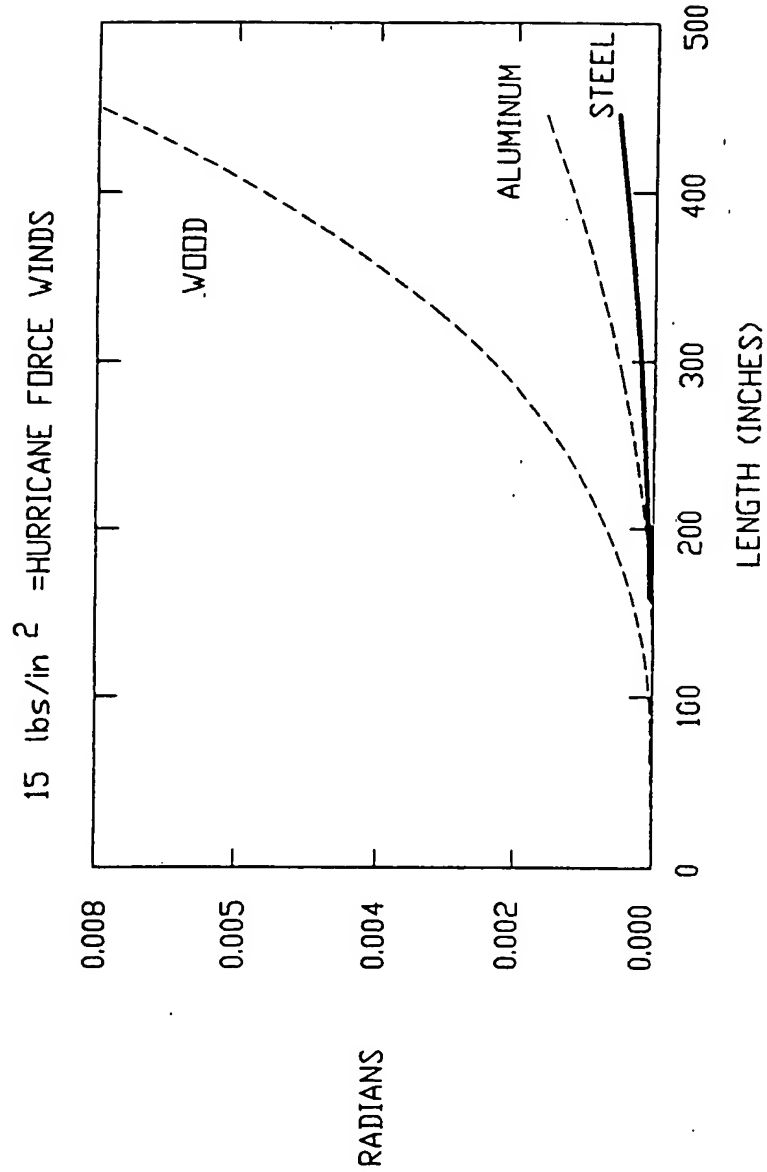


FIG. 18

19/19

FIG. 19




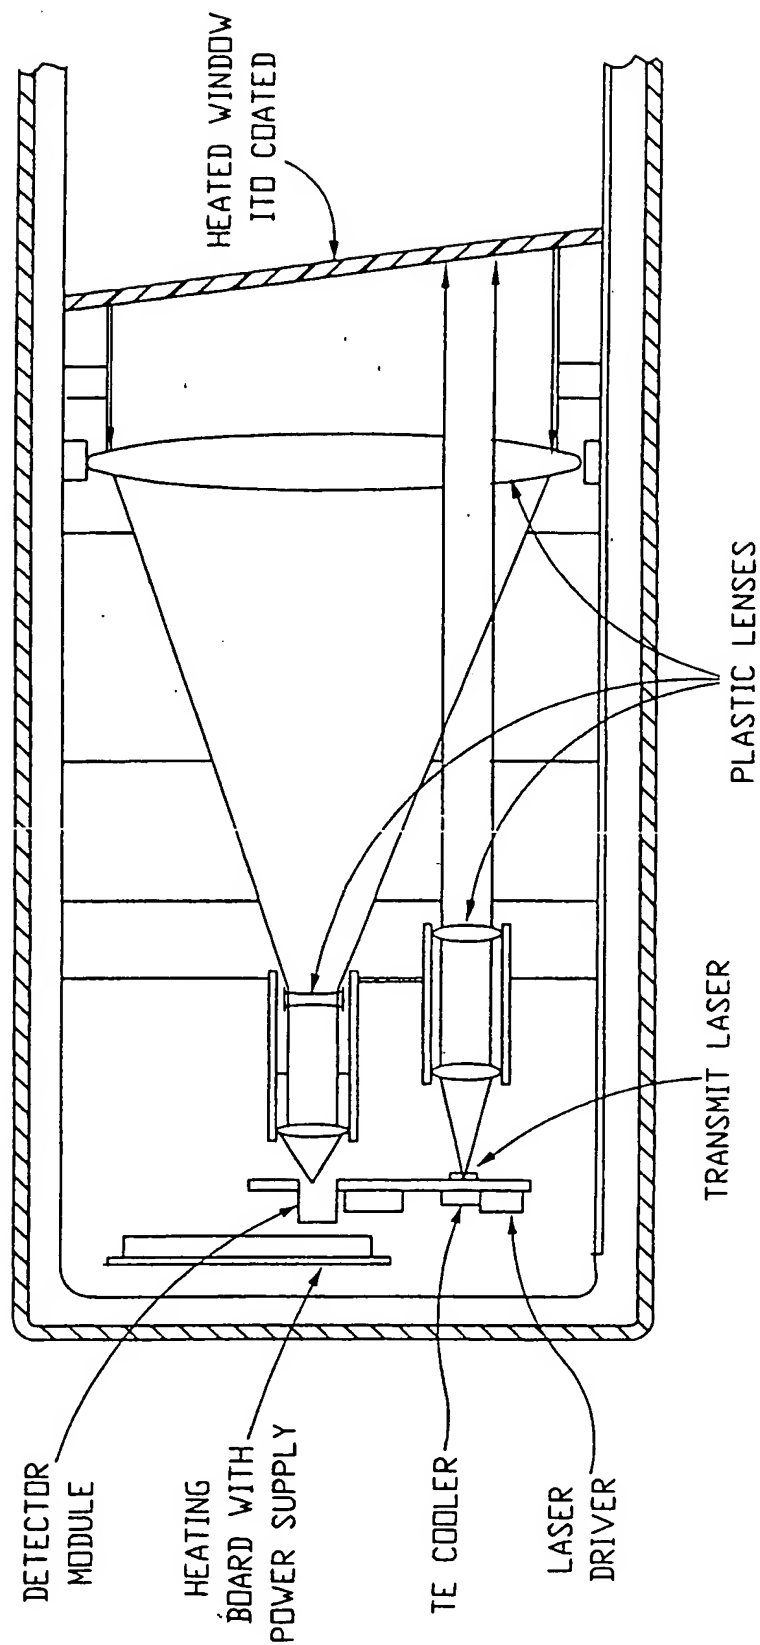

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04Q 7/20		A3	(11) International Publication Number: WO 98/32250
			(43) International Publication Date: 23 July 1998 (23.07.98)
(21) International Application Number: PCT/US98/01250		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 15 January 1998 (15.01.98)			
(30) Priority Data: 60/035,698 17 January 1997 (17.01.97) US Not furnished 19 December 1997 (19.12.97) US			
(71) Applicant (for all designated States except US): THE REGENTS OF THE UNIVERSITY OF CALIFORNIA [US/US]; 22nd floor, 300 Lakeside Drive, Oakland, CA 94612-3550 (US).		Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	
(72) Inventor; and (75) Inventor/Applicant (for US only): ACAMPORA, Anthony [US/US]; 6473 Avenida Cresta, La Jolla, CA 92037 (US).			
(74) Agent: FUESS, William, C.; Fuess & Davidenas, Suite II-G, 10951 Sorrento Valley Road, San Diego, CA 92121-1613 (US).			
(88) Date of publication of the international search report: 25 March 1999 (25.03.99)			

(54) Title: HYBRID UNIVERSAL BROADBAND TELECOMMUNICATIONS USING SMALL RADIO CELLS INTERCONNECTED BY FREE-SPACE OPTICAL LINKS

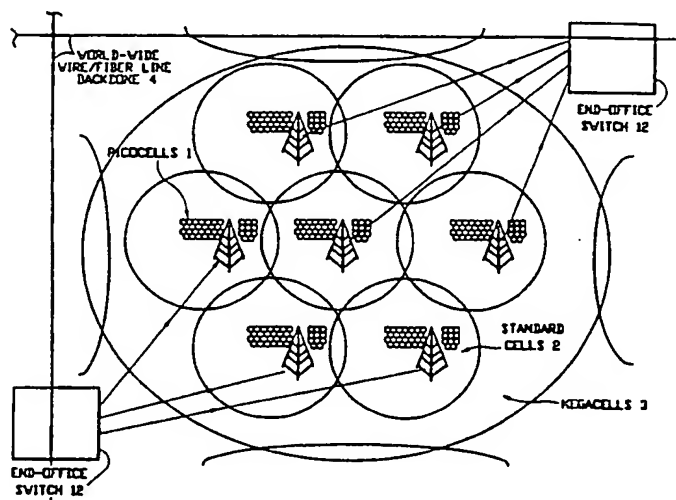

(57) Abstract

Diverse communication terminals attach via broadband radio to a communications network at any of typically three hierarchical cell sizes; picocells (1), standard cells (2) and macro cells (3), increasing from, typically, a single building to a city to a region. Almost all telecommunications traffic transpires, however, within the lowest level picocells (1) to and from low cost base stations (11) that have typically one radio transceiver (111), four optical transceivers (112) an ATM switch (11) and an ATM controller (114). Each local base station (11) is interconnected to a regional end office switch (12), where a connection to a worldwide wire/fiber line communications backbone (4), upon a multi-hop mesh network (100) via short highly-focused free-space broadband directional optical links (10). By this free-space wireless broadband access, subscriber service requirements on the order of 20 Mbps peak rate and 10 Mbps average are provided.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LJ	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US98/01250

A. CLASSIFICATION OF SUBJECT MATTER IPC(6) :H04Q 7/20 US CL :455/422 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) U.S. : 455/422, 436, 437, 439; 370/331, 256, 397 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) APS		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5,539,744 A (CHU et al.) 23 July 1996, abstract; fig. 5; fig. 22; col. 15: lines 54-67, col. 16: lines 1-22 and 51-67, col. 17: lines 1-16).	1-30
Y	US 5,553,069 A (UENO et al.) 03 SEPTEMBER 1996, abstract, figs. 3-6 and 9-10, col. 6: lines 58-67, col. 7: lines 1-46 and 60-67, col. 8: lines 1-18; col. 9: lines 30-54; col. 10: lines 14-38.	1-30
A	US 5,487,065 A (ACAMPORA et al.) 23 January 1996, abstract, col. 1: lines 14-67, col. 2: lines 1-59.	1-30
Y	US 5,420,863 A (TAKETSUGU et al.) 30 May 1995, abstract; figs. 9-10; col. 10: lines 22-67; col. 11: lines 1-44.	1-30
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.		
* "A"	Special categories of cited documents: document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"B"	earlier document published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L"	document which may throw doubt on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O"	document referring to an oral disclosure, use, exhibition or other means	"a" document member of the same patent family
"P"	document published prior to the international filing date but later than the priority date claimed	
Date of the actual completion of the international search 21 DECEMBER 1998		Date of mailing of the international search report 08 FEB 1999
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230		Authorized officer MYRON WYCHE <i>Joni Hill</i> Telephone No. (703) 308-6729

Form PCT/ISA/210 (second sheet)(July 1992)*

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.